

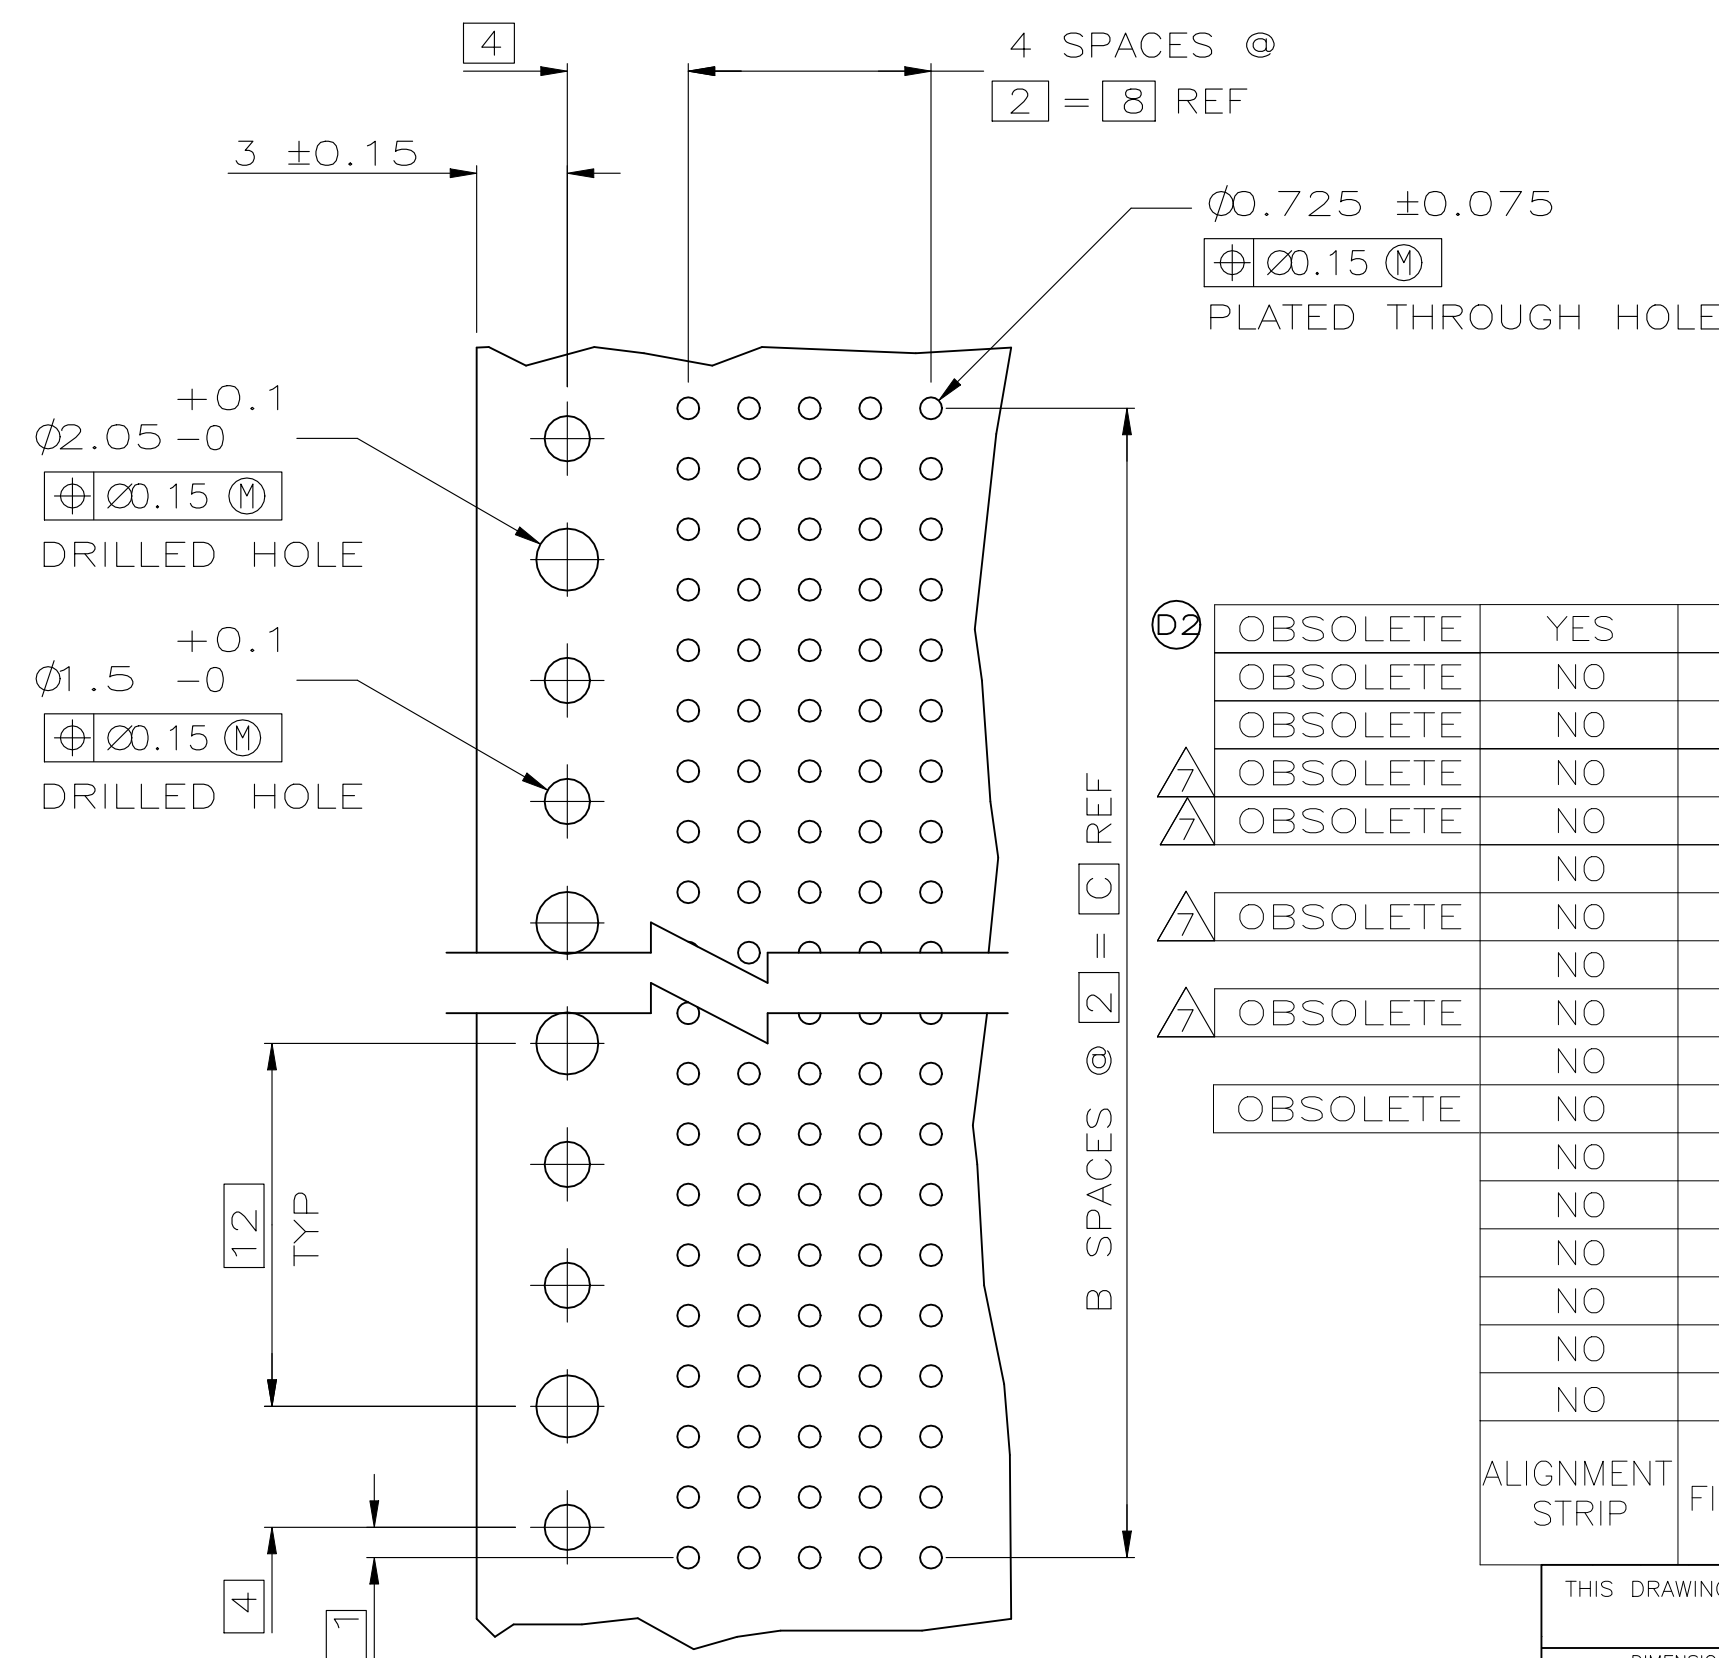
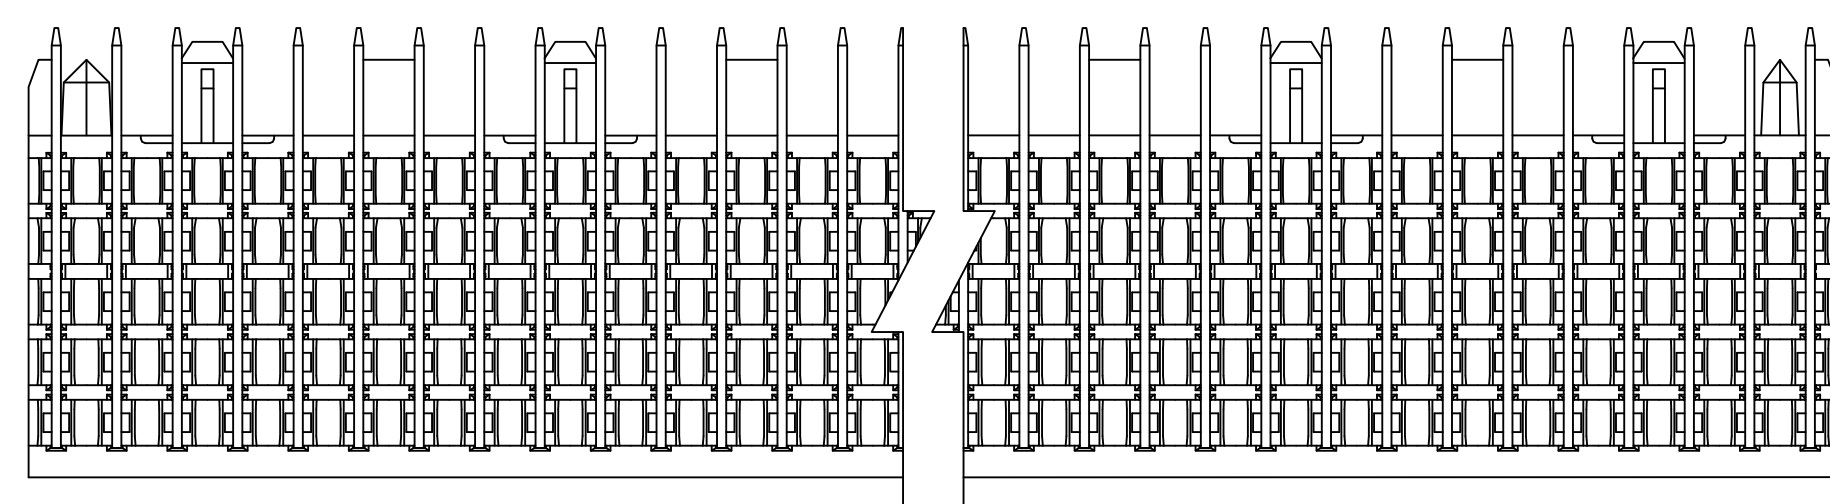


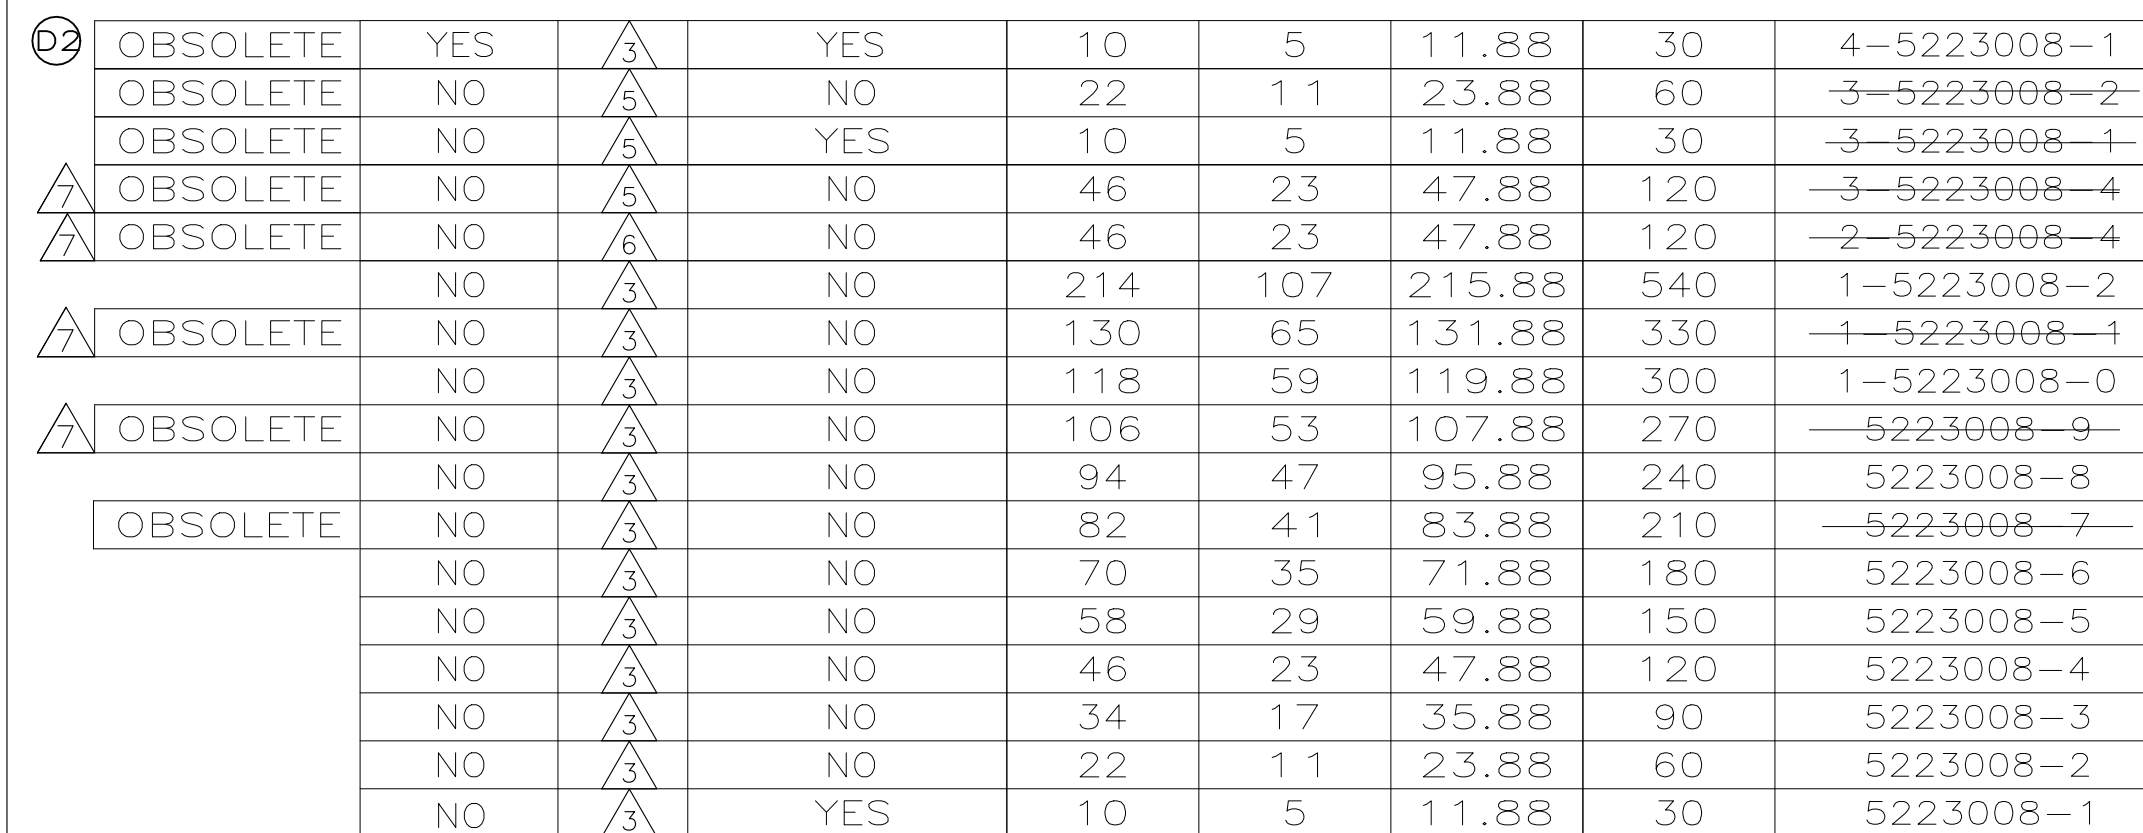

△ CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
0.00127 MIN NICKEL OR COBALT HARDENED GOLD
PER ASTM B-488 OVER UNDERPLATE.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: B.MCMMASTER CHK: R.WERTZ APVD: R.WERTZ		22NOV04 22NOV04 22NOV04		 TE Connectivity	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, RECEPTACLE, SIGNAL, RIGHT ANGLE, Z-PACK 2mm FB, 5 ROW, PRESS FIT LEAD		SIZE A1	
		PRODUCT SPEC — APPLICATION SPEC —					
MATERIAL		FINISH		DRAWING NO 00779		RESTRICTED TO —	
				CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV D	