

## SUMMARY

### # Wires



*Image is for illustrative purpose only*

|                  |                         |
|------------------|-------------------------|
| Series           | OK                      |
| Termination type | No contacts / Accessory |
| IP rating        | 68 when mated           |
| AWG wire size    | 0.00 - 0.00             |
| Cable Ø          | 0.00 - 0.00 mm          |
| Status           | active                  |

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |                                                                                         |
|-------------------|-----------------------------------------------------------------------------------------|
| Shell Style/Model | BRE*: Cap for receptacle                                                                |
| Keying            | No keying                                                                               |
| Housing Material  | Brass (nickel plated [SAE AMS QQ N 290]) shell, collet nut, latch sleeve and mid pieces |
| Weight            | 10.70 g                                                                                 |

### Performance

|               |
|---------------|
| Configuration |
| Insulator     |
| Rated Current |


### Others

Endurance (Shell): 5000 mating cycles  
Temp (min / max): -50°C / +135°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Climatical Category: 50/175/21  
Shielding (min): 95 dB (10 MHz)  
Shielding (min): 80 dB (1 GHz)  
Salt Spray Corrosion: >144 hr

## DRAWINGS

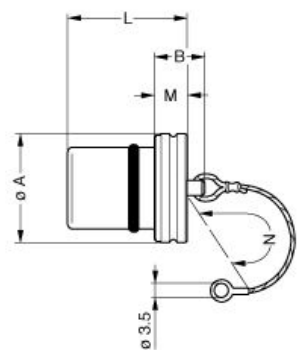

No keying

### Dimensions

|     | A    | B    | L    | M    | N    |
|-----|------|------|------|------|------|
| mm. | 15   | 10   | 15   | 4    | 85   |
| in. | 0,59 | 0,39 | 0,59 | 0,16 | 3,35 |

## RECOMMENDED BY LEMO

### Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.