

## SUMMARY

### # Wires



*Image is for illustrative purpose only*

|                  |                         |
|------------------|-------------------------|
| Series           | 1S                      |
| Termination type | No contacts / Accessory |
| IP rating        | 0                       |
| AWG wire size    | 0.00 - 0.00             |
| Cable Ø          | 0.00 - 0.00 mm          |
| Status           | active                  |

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

|                   |                                                                                                                    |
|-------------------|--------------------------------------------------------------------------------------------------------------------|
| Shell Style/Model | GCA*: Earthing washer                                                                                              |
| Keying            | No keying                                                                                                          |
| Housing Material  | Aluminum alloy (anodized) shell and collet nut, nickel plated [SAE AMS QQ N 290] brass latch sleeve and mid pieces |
| Weight            | .59 g                                                                                                              |

### Performance

|               |
|---------------|
| Configuration |
| Insulator     |
| Rated Current |


### Others

Temp (min / max): -55°C / +250°C  
Humidity (max): <=95% [at 60 deg C / 140 F]  
Vibration: 15 g [10 Hz - 2000 Hz]  
Shock Resistance: 100 g [ 6 ms]

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.

Climatical Category: 50/175/21  
Shielding (min): 75 dB (10 MHz)  
Shielding (min): 40 dB (1 GHz)  
12NC part number: 4022.438.33394

# DRAWINGS

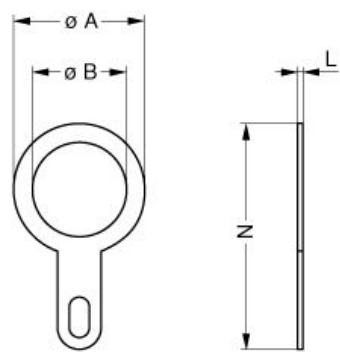

No keying

## Dimensions

|     | A    | B    | L    | N    |
|-----|------|------|------|------|
| mm. | 17   | 12.2 | 0.5  | 27.5 |
| in. | 0,67 | 0,48 | 0,02 | 1,08 |

# RECOMMENDED BY LEMO

## Tools

LEMO products and services are provided "as is". LEMO makes no warranties or representations with regard to LEMO product & services or use of them, express, implied or statutory, including for accuracy, completeness, or security. The user is fully responsible for his products and applications using LEMO components.