
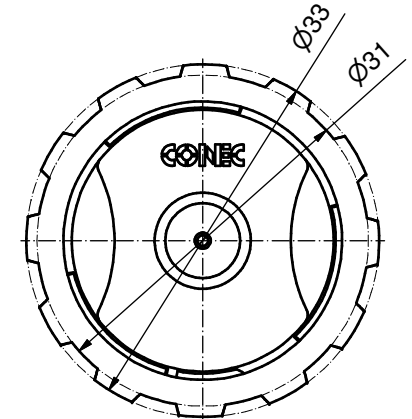
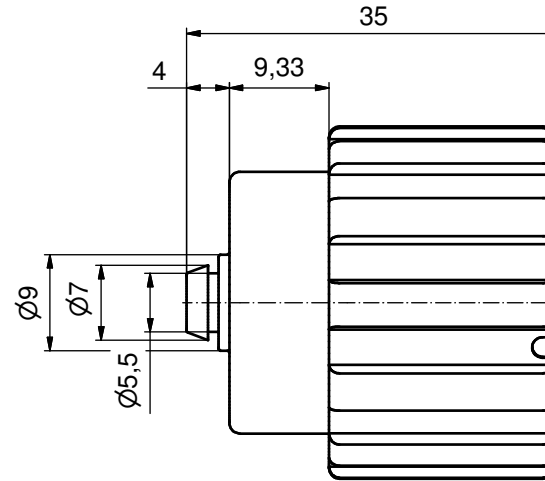
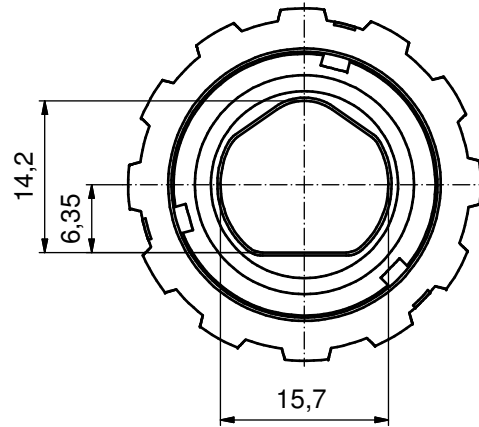


VIEWS WITHOUT TETHER

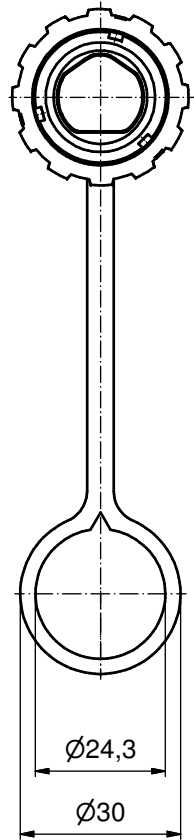


NOTES:

1. MATERIAL AND FINISH:

- COUPLER RING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- COVER HOUSING: PA GF (BLACK); UL94 V-0; UL (f1) RATED
- TETHER: PE-SW (BLACK),
- INTERFACIAL SEAL: SILICONE; COLOR: WHITE
- RETAINING RING: STAINLESS STEEL

2. OPERATING TEMPERATURE: -40 °C to +85 °C

3. IP67 RATED WHEN COVERED OR FULLY MATED WITH THE APPROPRIATE MATING CONNECTOR

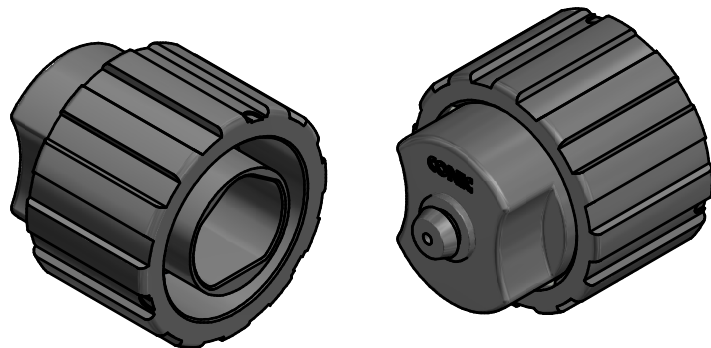

RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				tolerance		 dim. in mm	scale: 2:1 (1:1)						
							material: see notes						
								date	name	title: Protective Cover Ⓟ for IP67 Duplex Power 3pos Female Receptacle Assembly			
								drawn 20.04.15	Henneboel				
								appd. 20.04.15	Koch				
				norm									
DO NOT ALTER CAD DRAWING BY HAND					d-old		dwg no:		DIN-A3				
				1 x b	Ä6182	06.06.2016					K.H.		
				a	Original					17K1A463		sh: 1	
				rev.	description	date	name						

Protective Cover
for IP67 Duplex Power 3pos
Female Receptacle Assembly

17K1A463

17-400400