

VTC13E250TRSM

A


VARIABLE INDUCTOR COIL
(NONMAGNETIC)

U.S. PATENT No. 8,248,198

FILE: AIROUT

NOTES:

1. a. DIMENSIONS: mm
b. DIMENSIONS: (inches) FOR REFERENCE ONLY
2. COIL :
a. MATERIAL:
COPPER ALLOY (COATED)
b. COATING ABLE TO WITHSTAND 275°C FOR 100 HOURS AS PER NEMA "CLASS 200". (REF ASTM D2307)
3. CORE :
a. MATERIAL:
PTFE / COPPER ALLOY
b. SELF-RESONANT FREQUENCY (SRF) IS MEASURED WITH THE CORE) FULLY ENGAGED AS DEPICTED
c. L MIN MEASURED WITH CORE ENGAGING FULL WINDINGS. L MAX MEASURED WITH CORE ENGAGING A SINGLE TURN.
4. TINNING :
a. MATERIAL:
RoHS COMPLIANT "SAC" ALLOY'

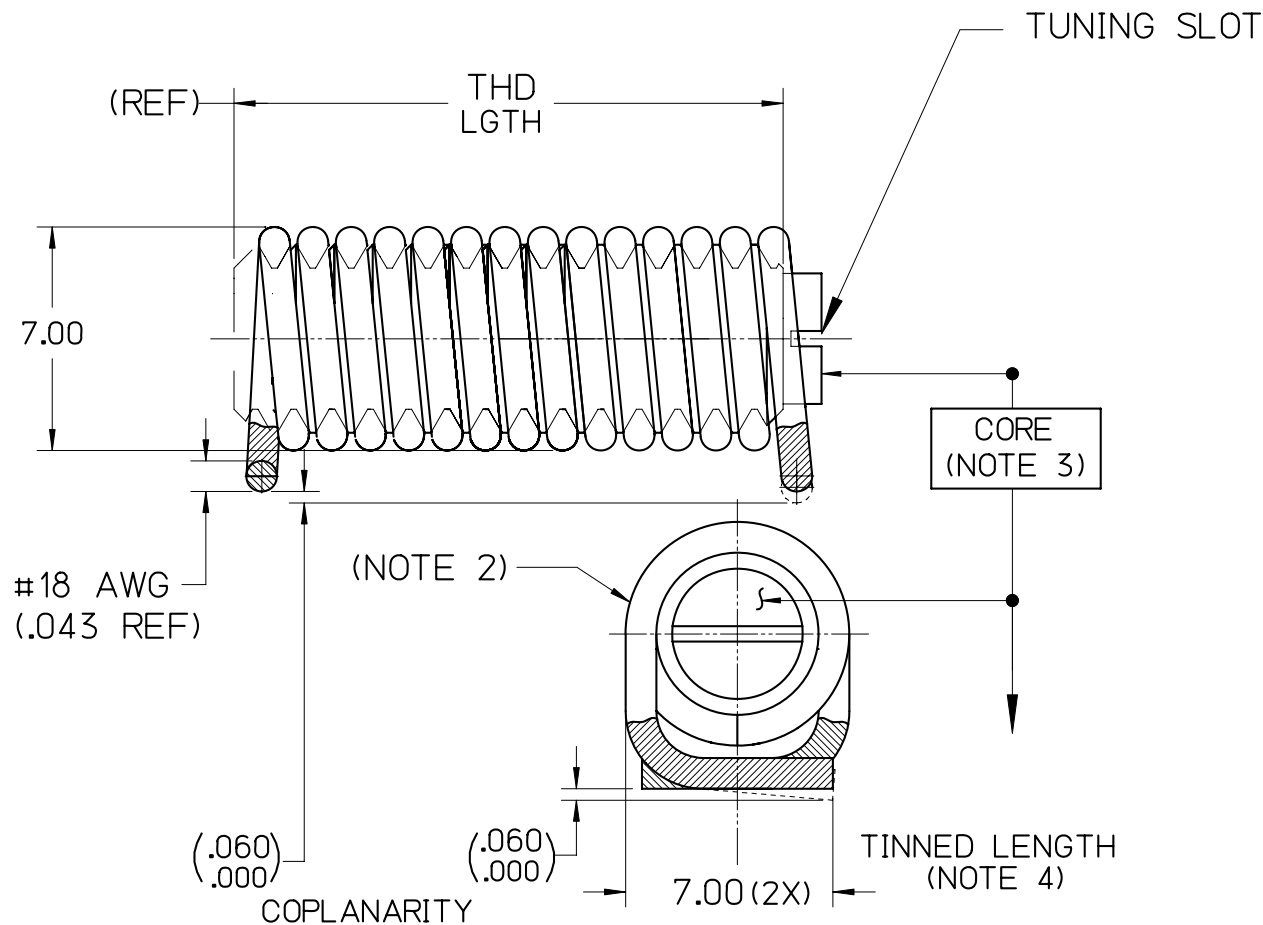

KNOWLES P/N	L (nH)				Q (@ 100 MHz)	SRF (GHz)	TURNS	THD LGTH (mm)
	MIN	NOM	MAX	NO CORE				
VTC13E250TRSM	185	219	270	294	199	430	13	18

READINGS TAKEN ON AGILENT/8358-A METER.

knowles
DLI - Johanson MFG - Novacap - Syfer - Voltronics

Knowles Cazenovia
2777 Route 20 East
Cazenovia, NY 13035

A	11/10/17	MAI	-	-	001457
LEVEL	DATE	DRN.	CHK.	APP.	ECN
REVISIONS					
DRN.	MAI	CHK.	MAI	APP.	MAI
DATE	11/10/17	DATE	11/10/17	DATE	11/10/17
					.XX ± .762 .XXX ± .254