
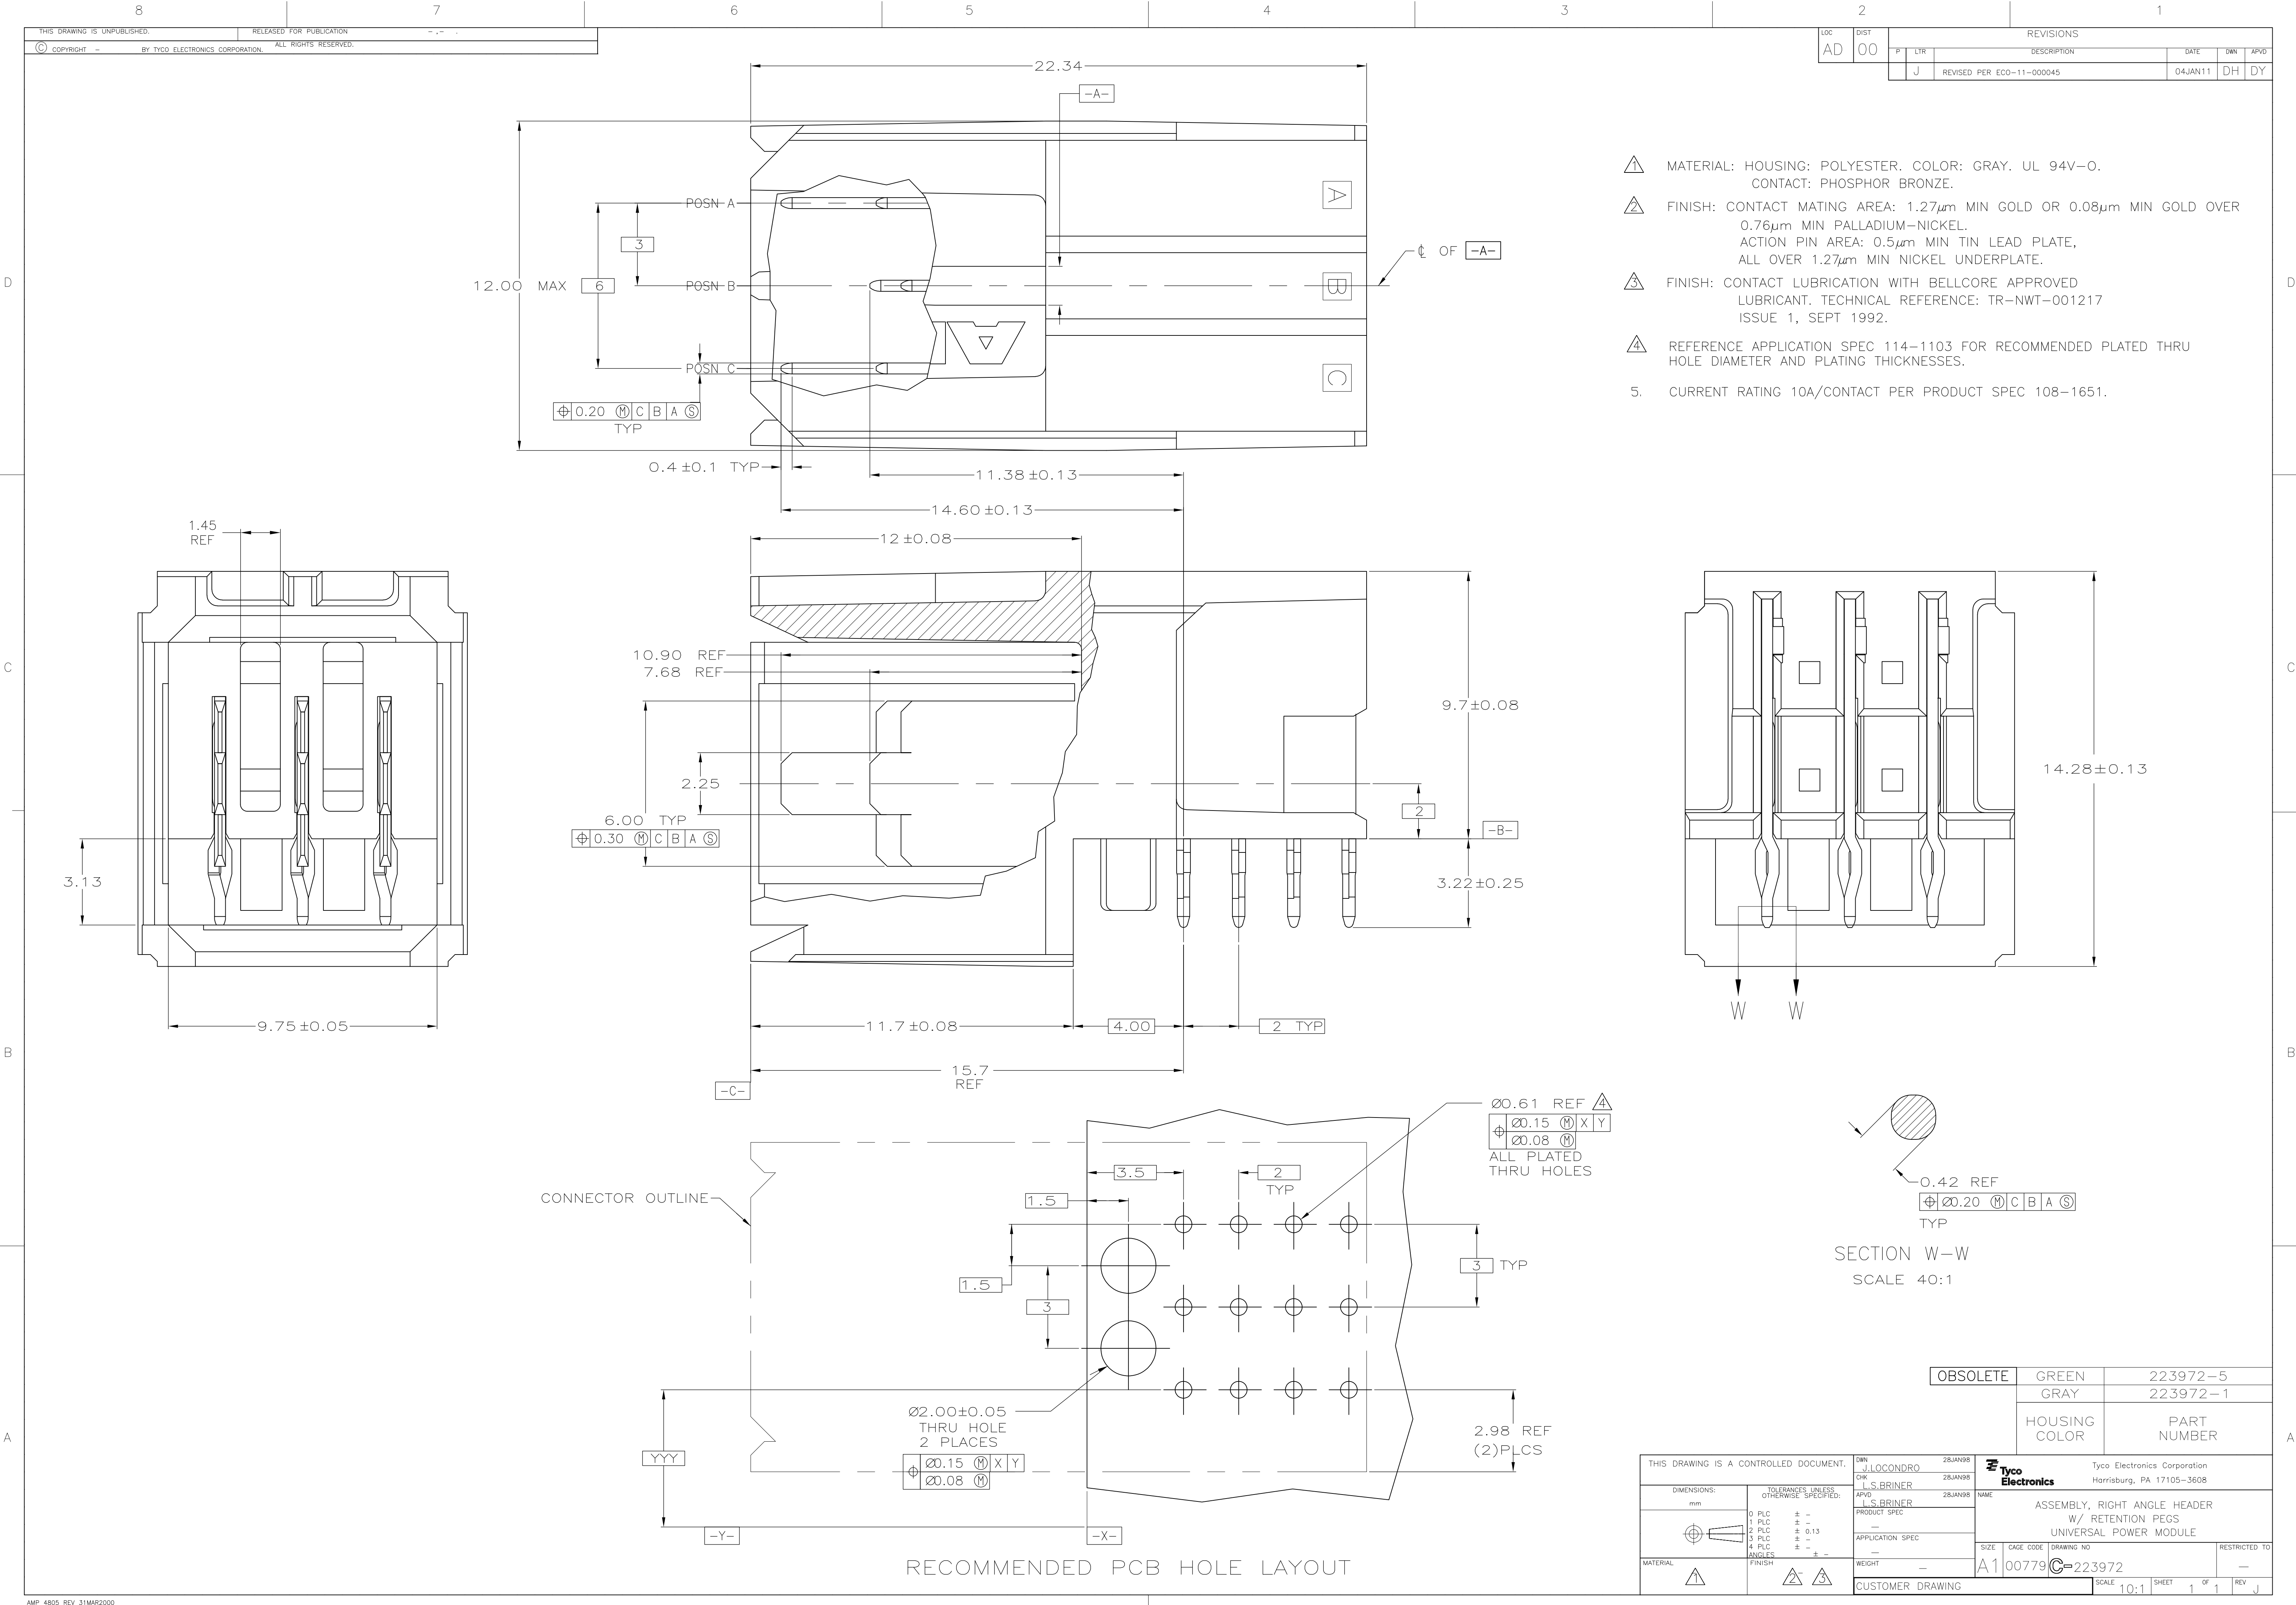




- ⚠ MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. UL 94V-0.
CONTACT: PHOSPHOR BRONZE.
- ⚠ FINISH: CONTACT MATING AREA: 1.27 μ m MIN GOLD OR 0.08 μ m MIN GOLD OVER
0.76 μ m MIN PALLADIUM-NICKEL.
ACTION PIN AREA: 0.5 μ m MIN TIN LEAD PLATE,
ALL OVER 1.27 μ m MIN NICKEL UNDERPLATE.
- ⚠ FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED
LUBRICANT. TECHNICAL REFERENCE: TR-NWT-001217
ISSUE 1, SEPT 1992.
- ⚠ REFERENCE APPLICATION SPEC 114-1103 FOR RECOMMENDED PLATED THRU
HOLE DIAMETER AND PLATING THICKNESSES.
5. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.

OBSOLETE	GREEN	223972-5
	GRAY	223972-1
HOUSING COLOR	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.LOCONDRO 28JAN98	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK L.S.BRINER 28JAN98	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD L.S.BRINER 28JAN98	ASSEMBLY, RIGHT ANGLE HEADER W/ RETENTION PEGS UNIVERSAL POWER MODULE	
		PRODUCT SPEC —	—	
		APPLICATION SPEC —	—	
MATERIAL		WEIGHT —	SIZE A1	CAGE CODE 00779
FINISH   		DRAWING NO C-223972		RESTRICTED TO —
CUSTOMER DRAWING			SCALE 10:1	SHEET 1 OF 1
			REV J	