


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B		REVISED PER ECO-10-012356	14DEC2010	CJV	EJB
C		ECO-15-006497	13APR2016	LL	SH

D

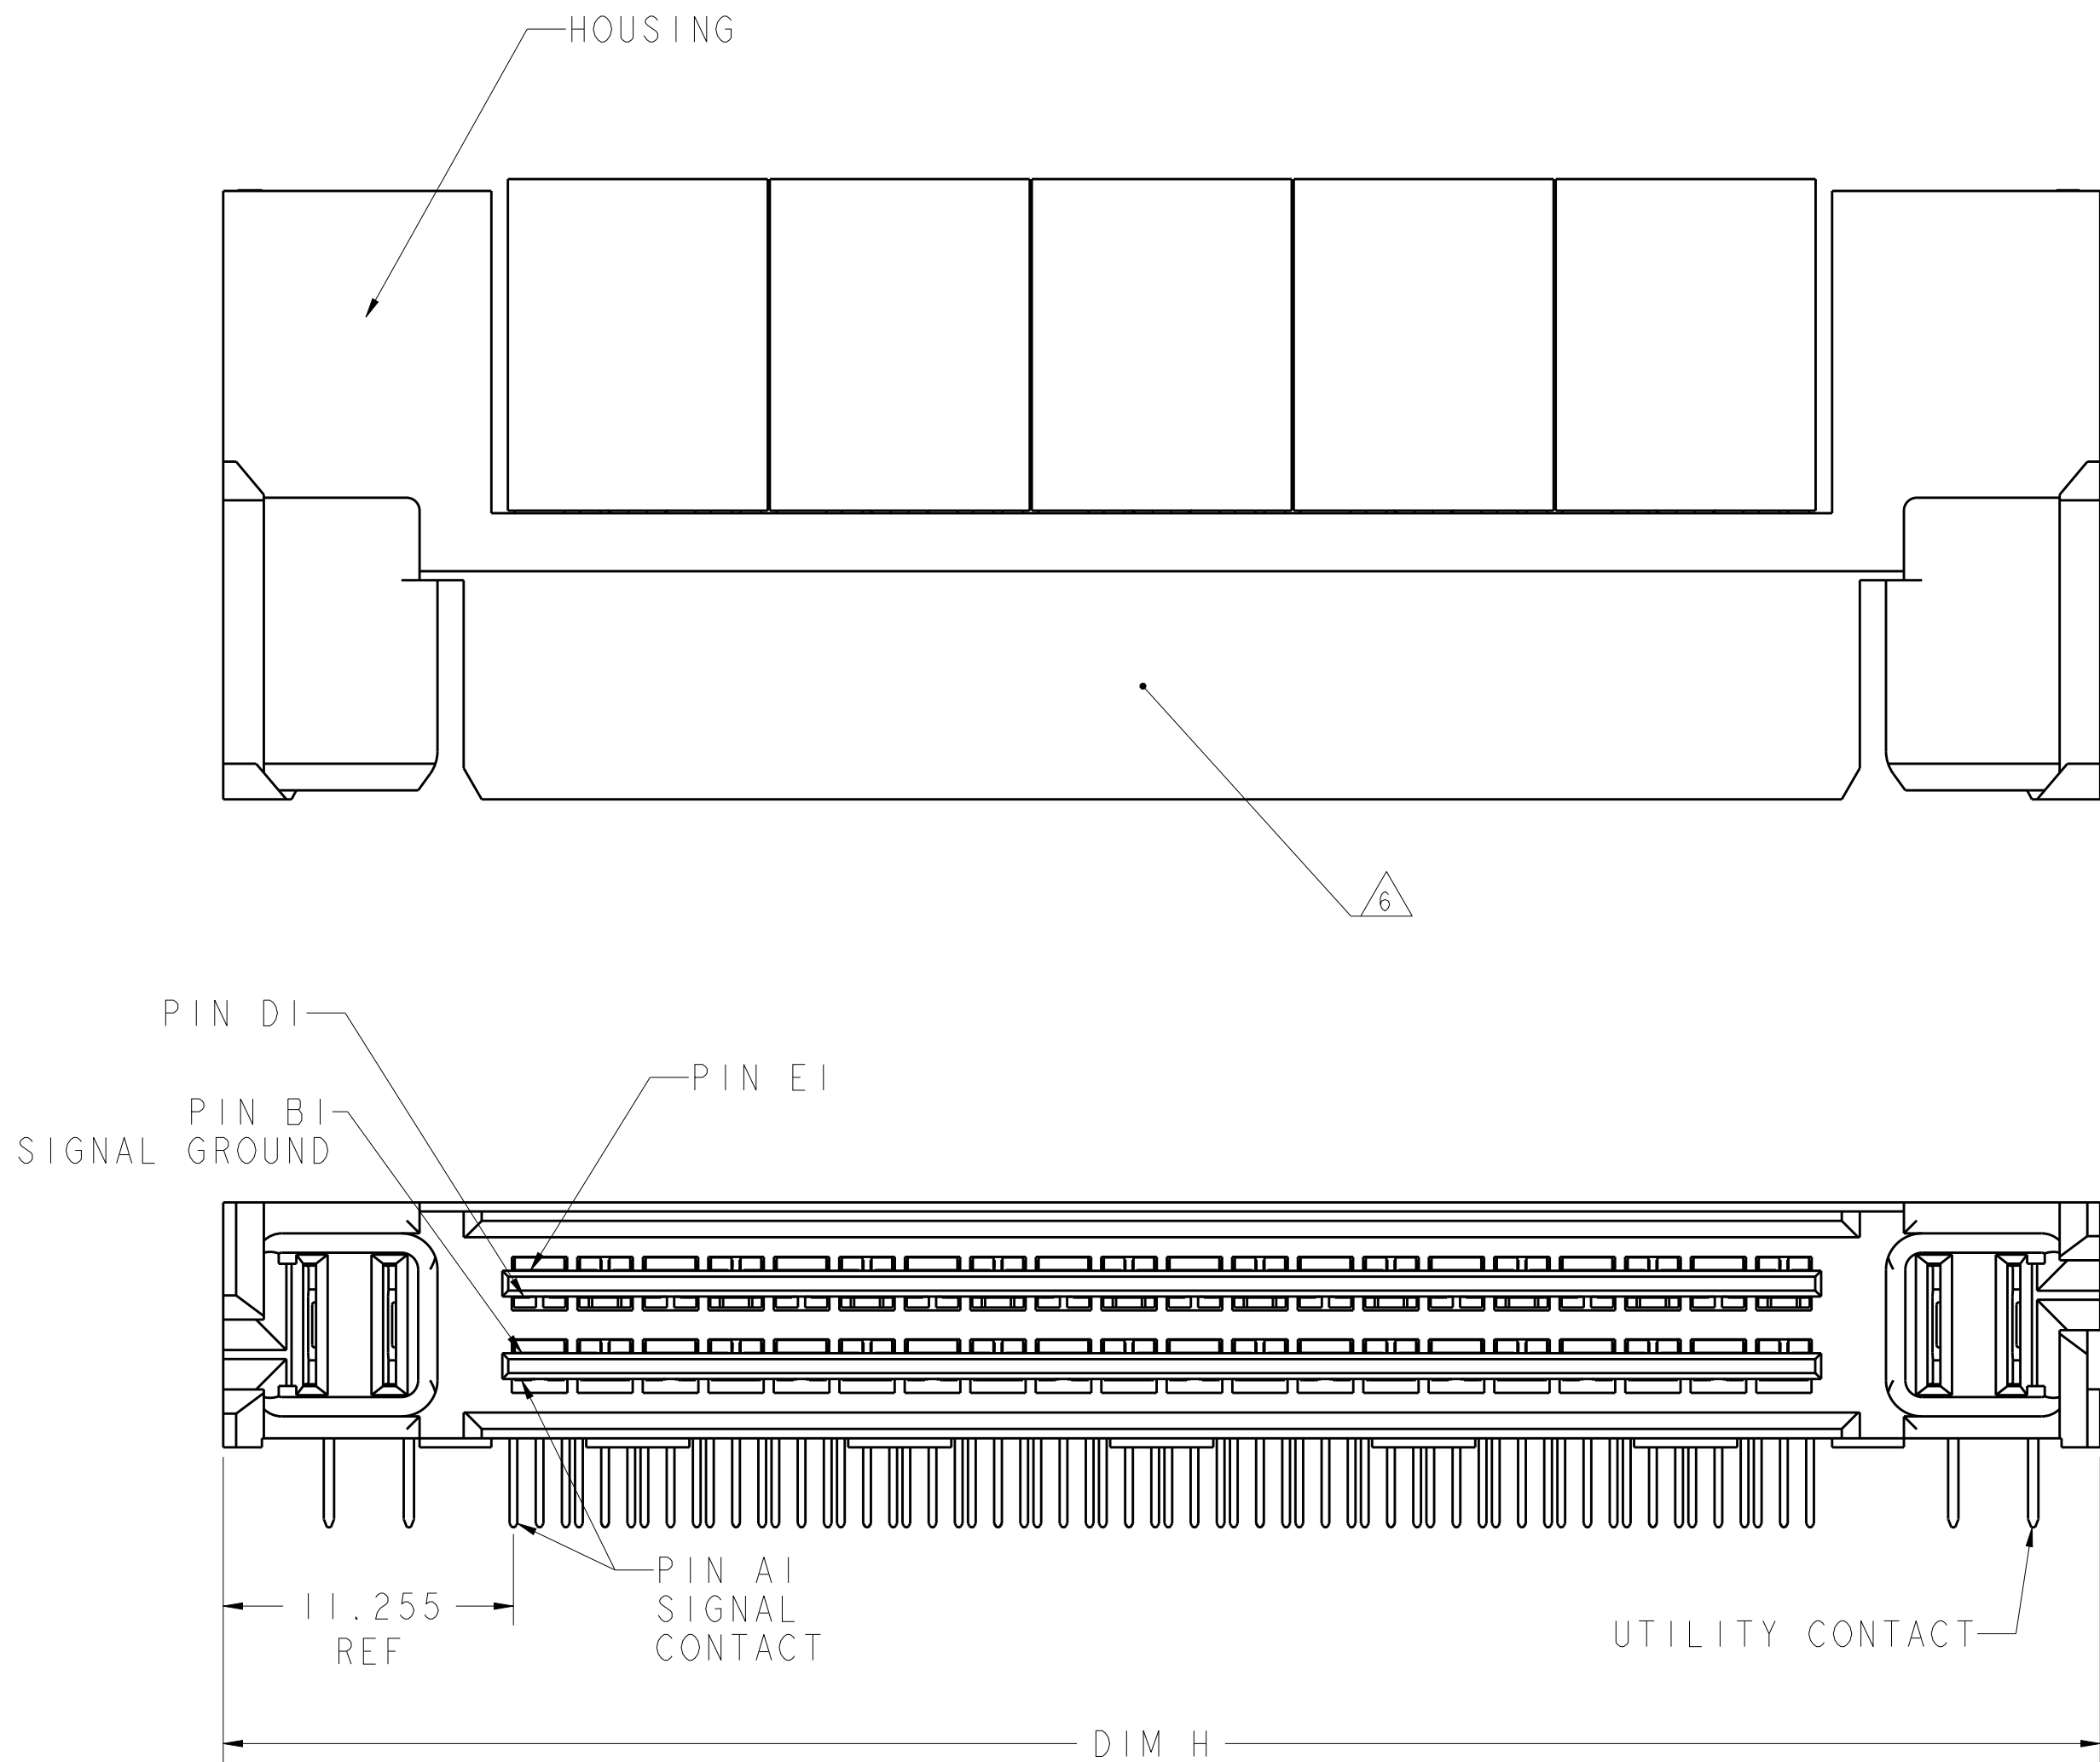

△ HOUSINGS; POLYESTER, UL 94 V-O RATED, NATURAL
SIGNAL AND SIGNAL GROUND CONTACTS: COPPER ALLOY
UTILITY CONTACTS: PHOSPHOR BRONZE

△ UTILITY CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.
SIGNAL AND SIGNAL GROUND CONTACTS: 0.76um MIN GOLD IN CONTACT AREA,
2.54um MIN TIN ON PCB TAILS, OVER 1.27um MIN NICKEL OVER ALL.



3. ROWS A, C, D, AND F ARE SIGNAL CONTACTS. ROWS B AND E ARE SIGNAL GROUND CONTACTS.

△ CONNECTOR SIZE CAN ACCOMMODATE INDICATED QUANTITY OF DIFFERENTIAL PAIRS.


△ DIMENSIONS PER CUSTOMER BOARD LAYOUT.

△ COMPANY LOGO IN APPROXIMATE AREA SHOWN.

△ OBSOLETE PART.

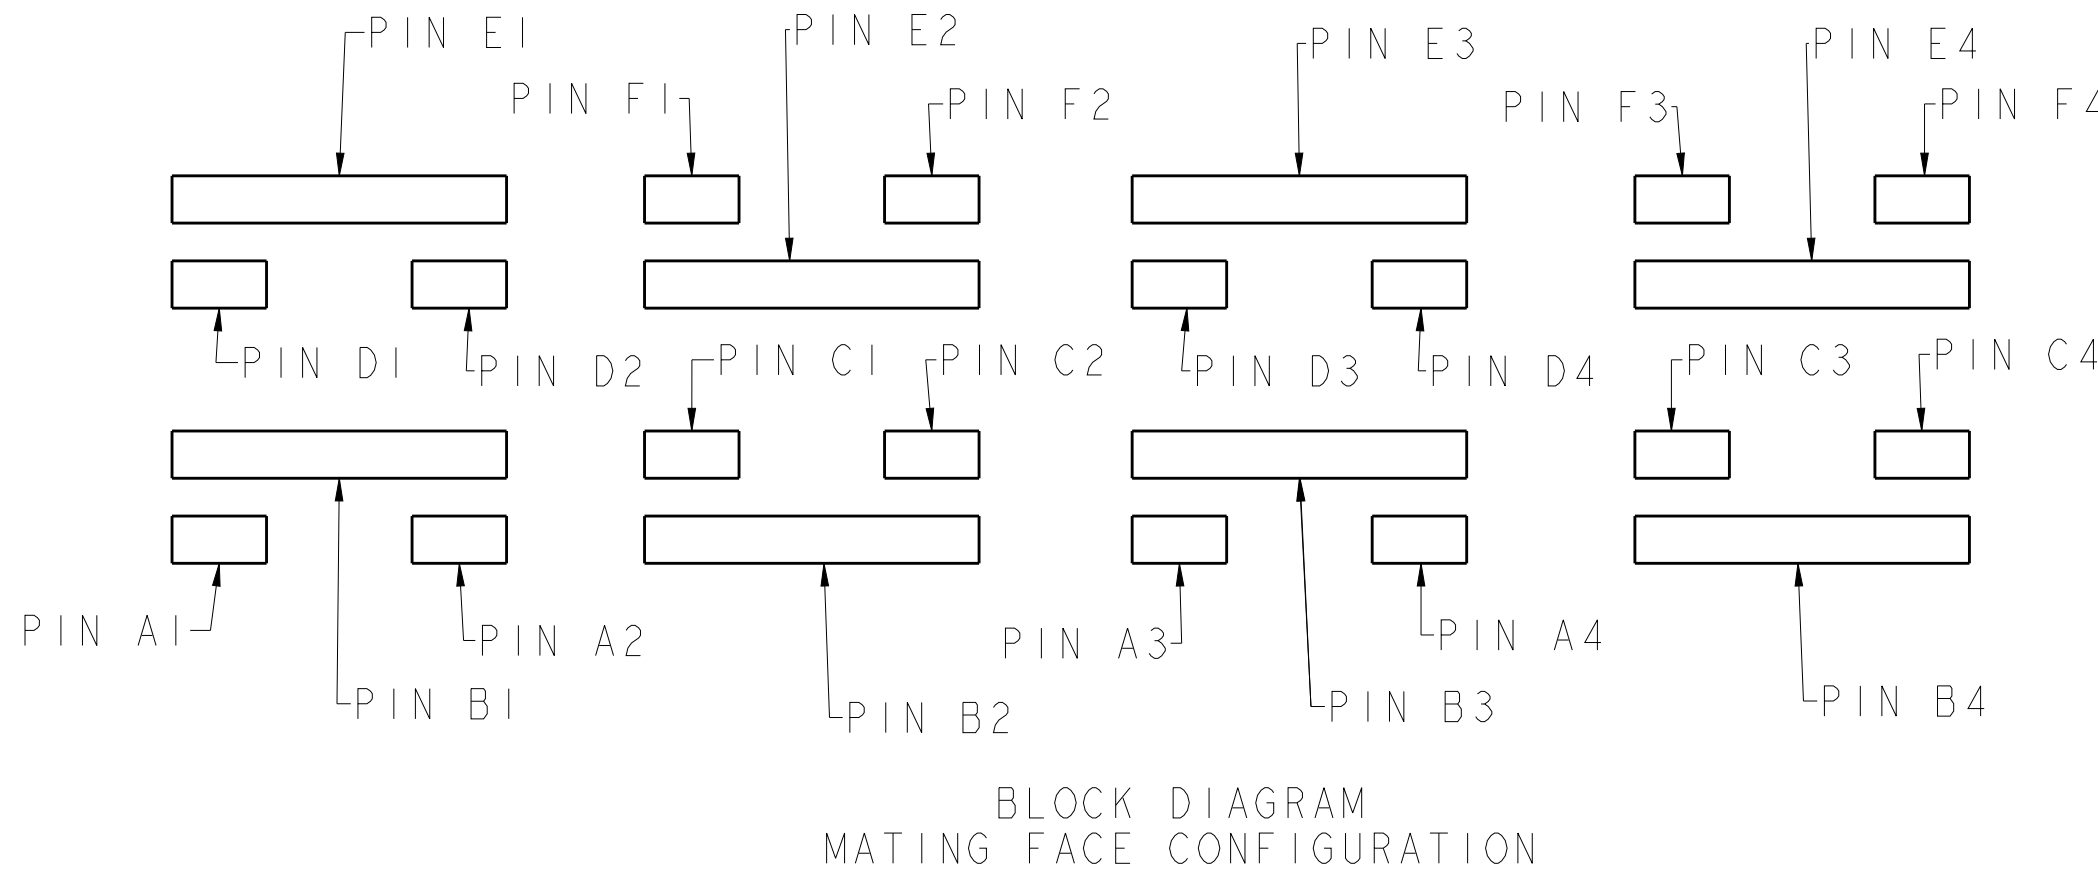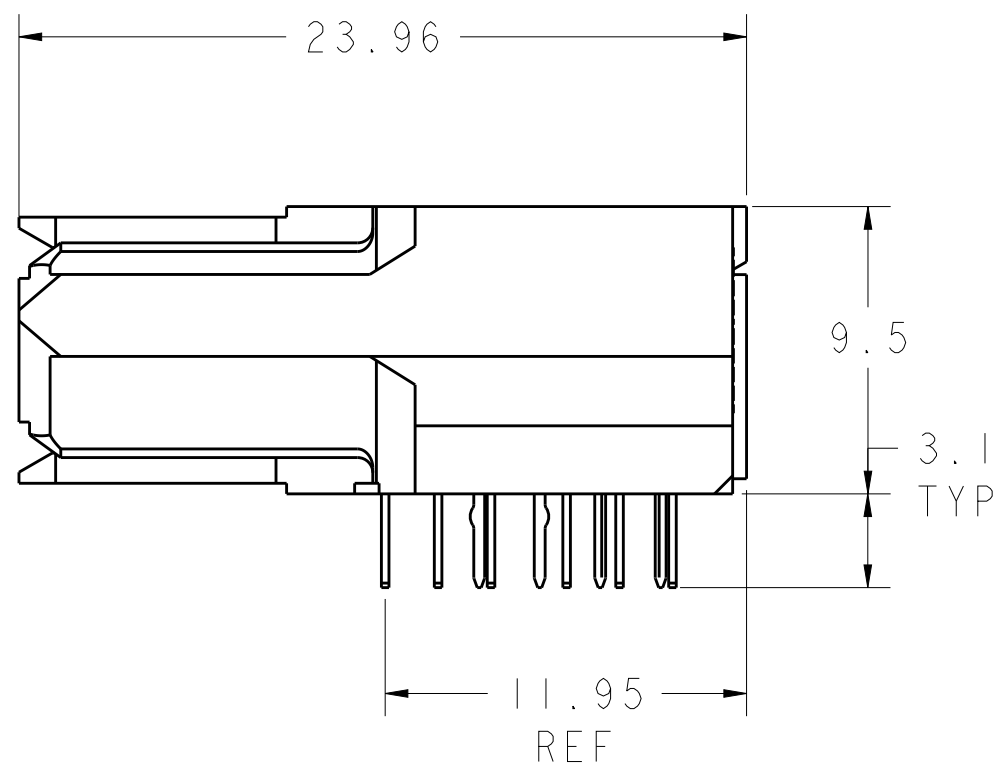

B

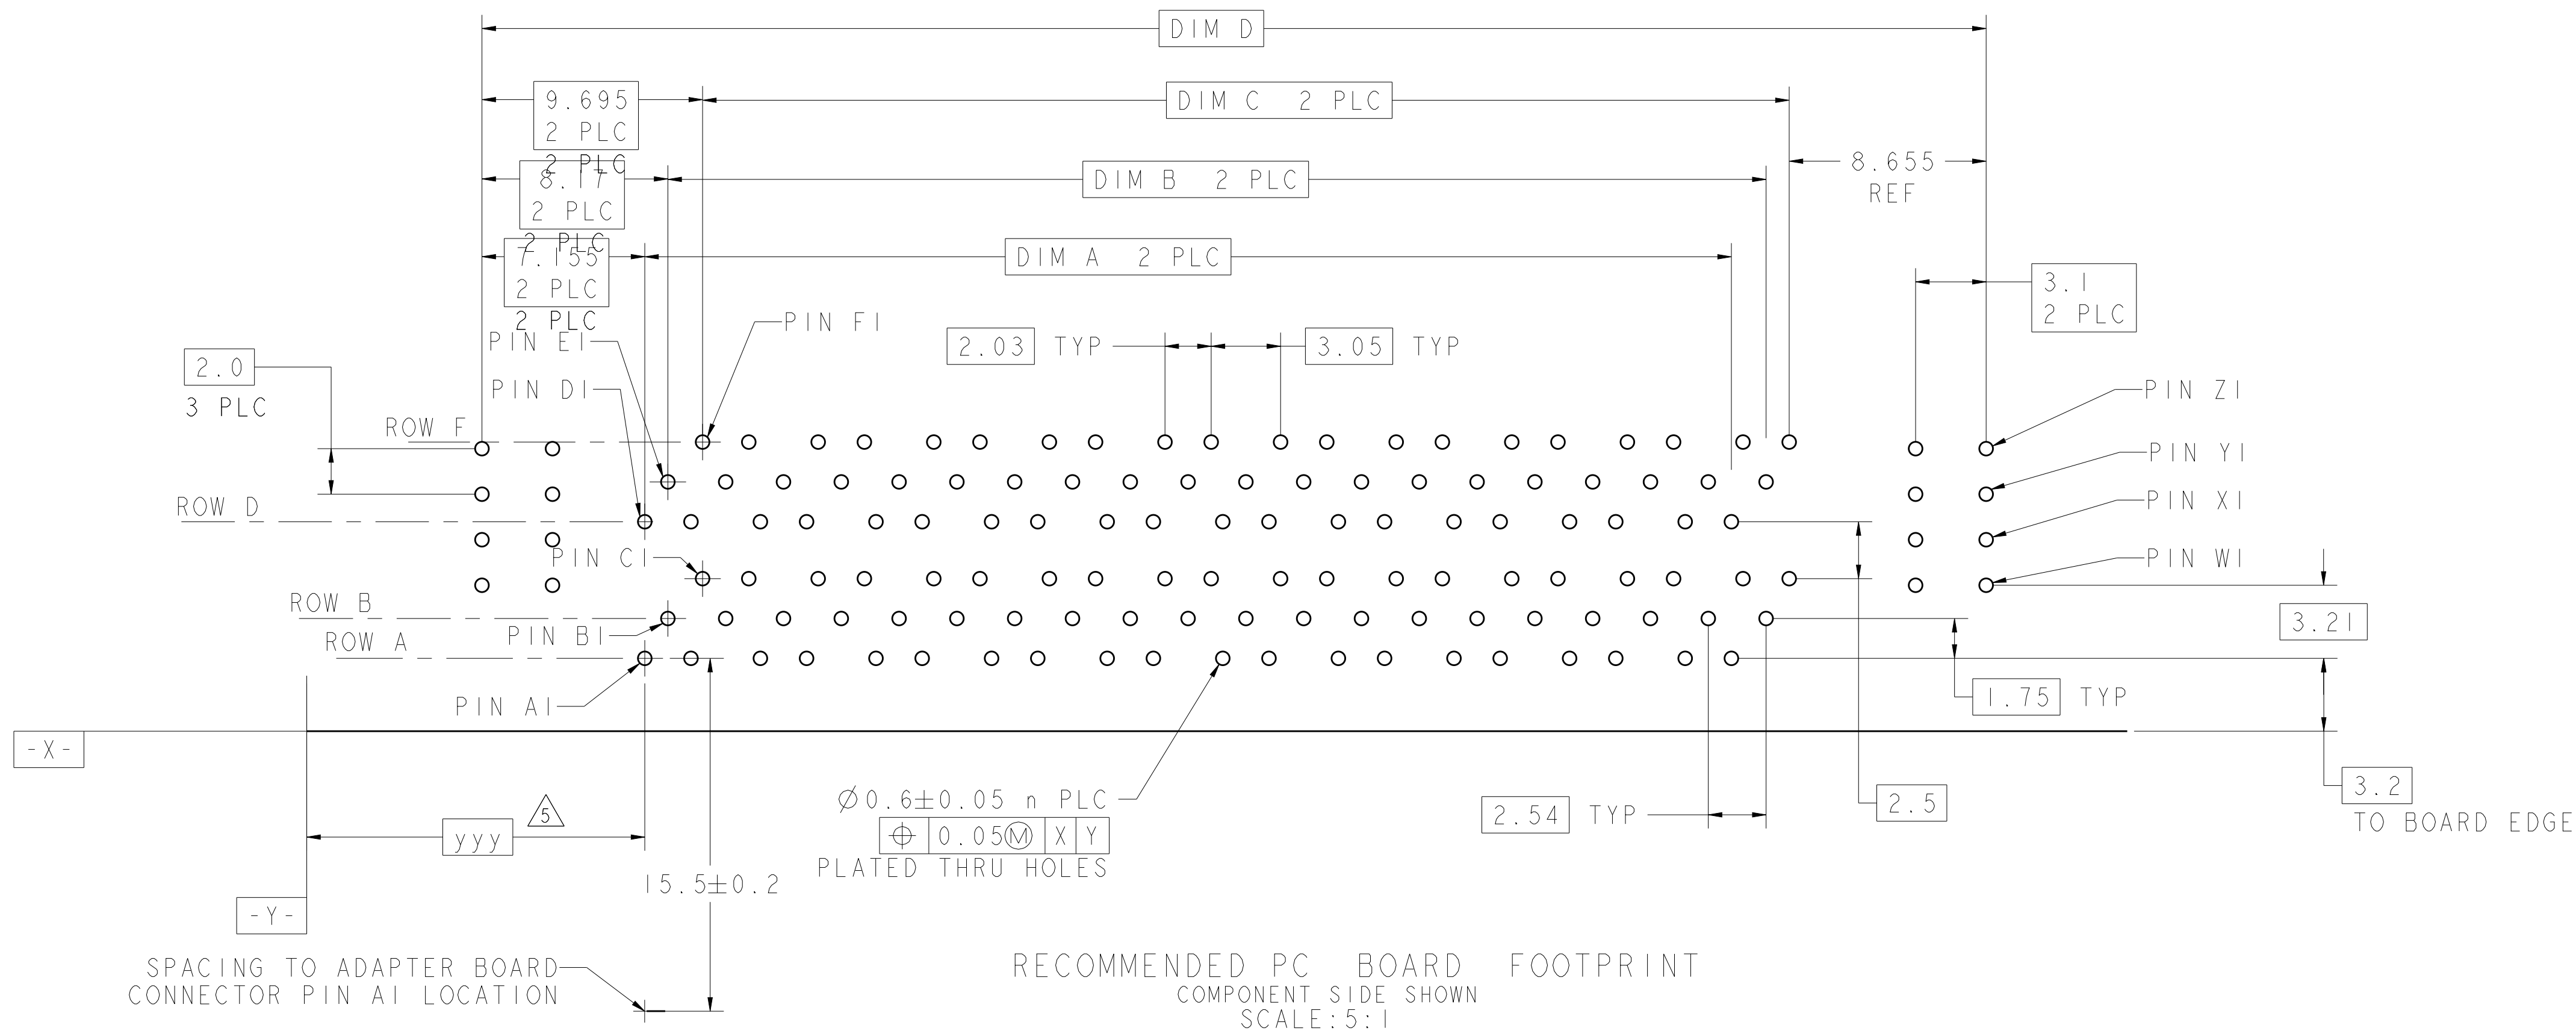

RECOMMENDED PC BOARD FOOTPRINT
COMPONENT SIDE SHOWN
SCALE: 5:1

△ 7	232	113.44	106.74	88.90	88.39	72	6367580-9
△ 7	208	103.28	96.58	78.74	78.23	64	6367580-8
△ 7	184	93.12	86.42	68.58	68.07	56	6367580-7
△ 7	160	82.96	76.26	58.42	57.91	48	6367580-6
△ 7	136	72.80	66.10	48.26	47.75	40	6367580-5
	112	62.64	55.94	38.10	37.59	32	6367580-4
	88	52.48	45.78	27.94	27.43	24	6367580-3
	64	42.32	35.62	17.78	17.27	16	6367580-2
△ 7	40	32.16	25.46	7.62	7.11	8	6367580-1
	N	H DIM	D DIM	B DIM	A OR C DIM	DIFF PAIRS △ 4	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: BM VAN SCYOC 27MAR05	TE Connectivity	
		CHK: N. REESER 27MAR05		
DIMENSIONS:		APVD: N. REESER 27MAR05	NAME: Z-DOK+ HOST BOARD CONNECTOR ASSEMBLY, 8-72 SIGNAL DIFF. PAIR, 2 UTILITY CONTACTS PER SIDE	
mm		PRODUCT SPEC		
		108-1985	SIZE: A100779C=6367580	
		APPLICATION SPEC		
MATERIAL: △		114-13068	SCALE: 4:1	
FINISH: △ 2		WEIGHT: -		
		CUSTOMER DRAWING	SHEET 1 OF 1	