


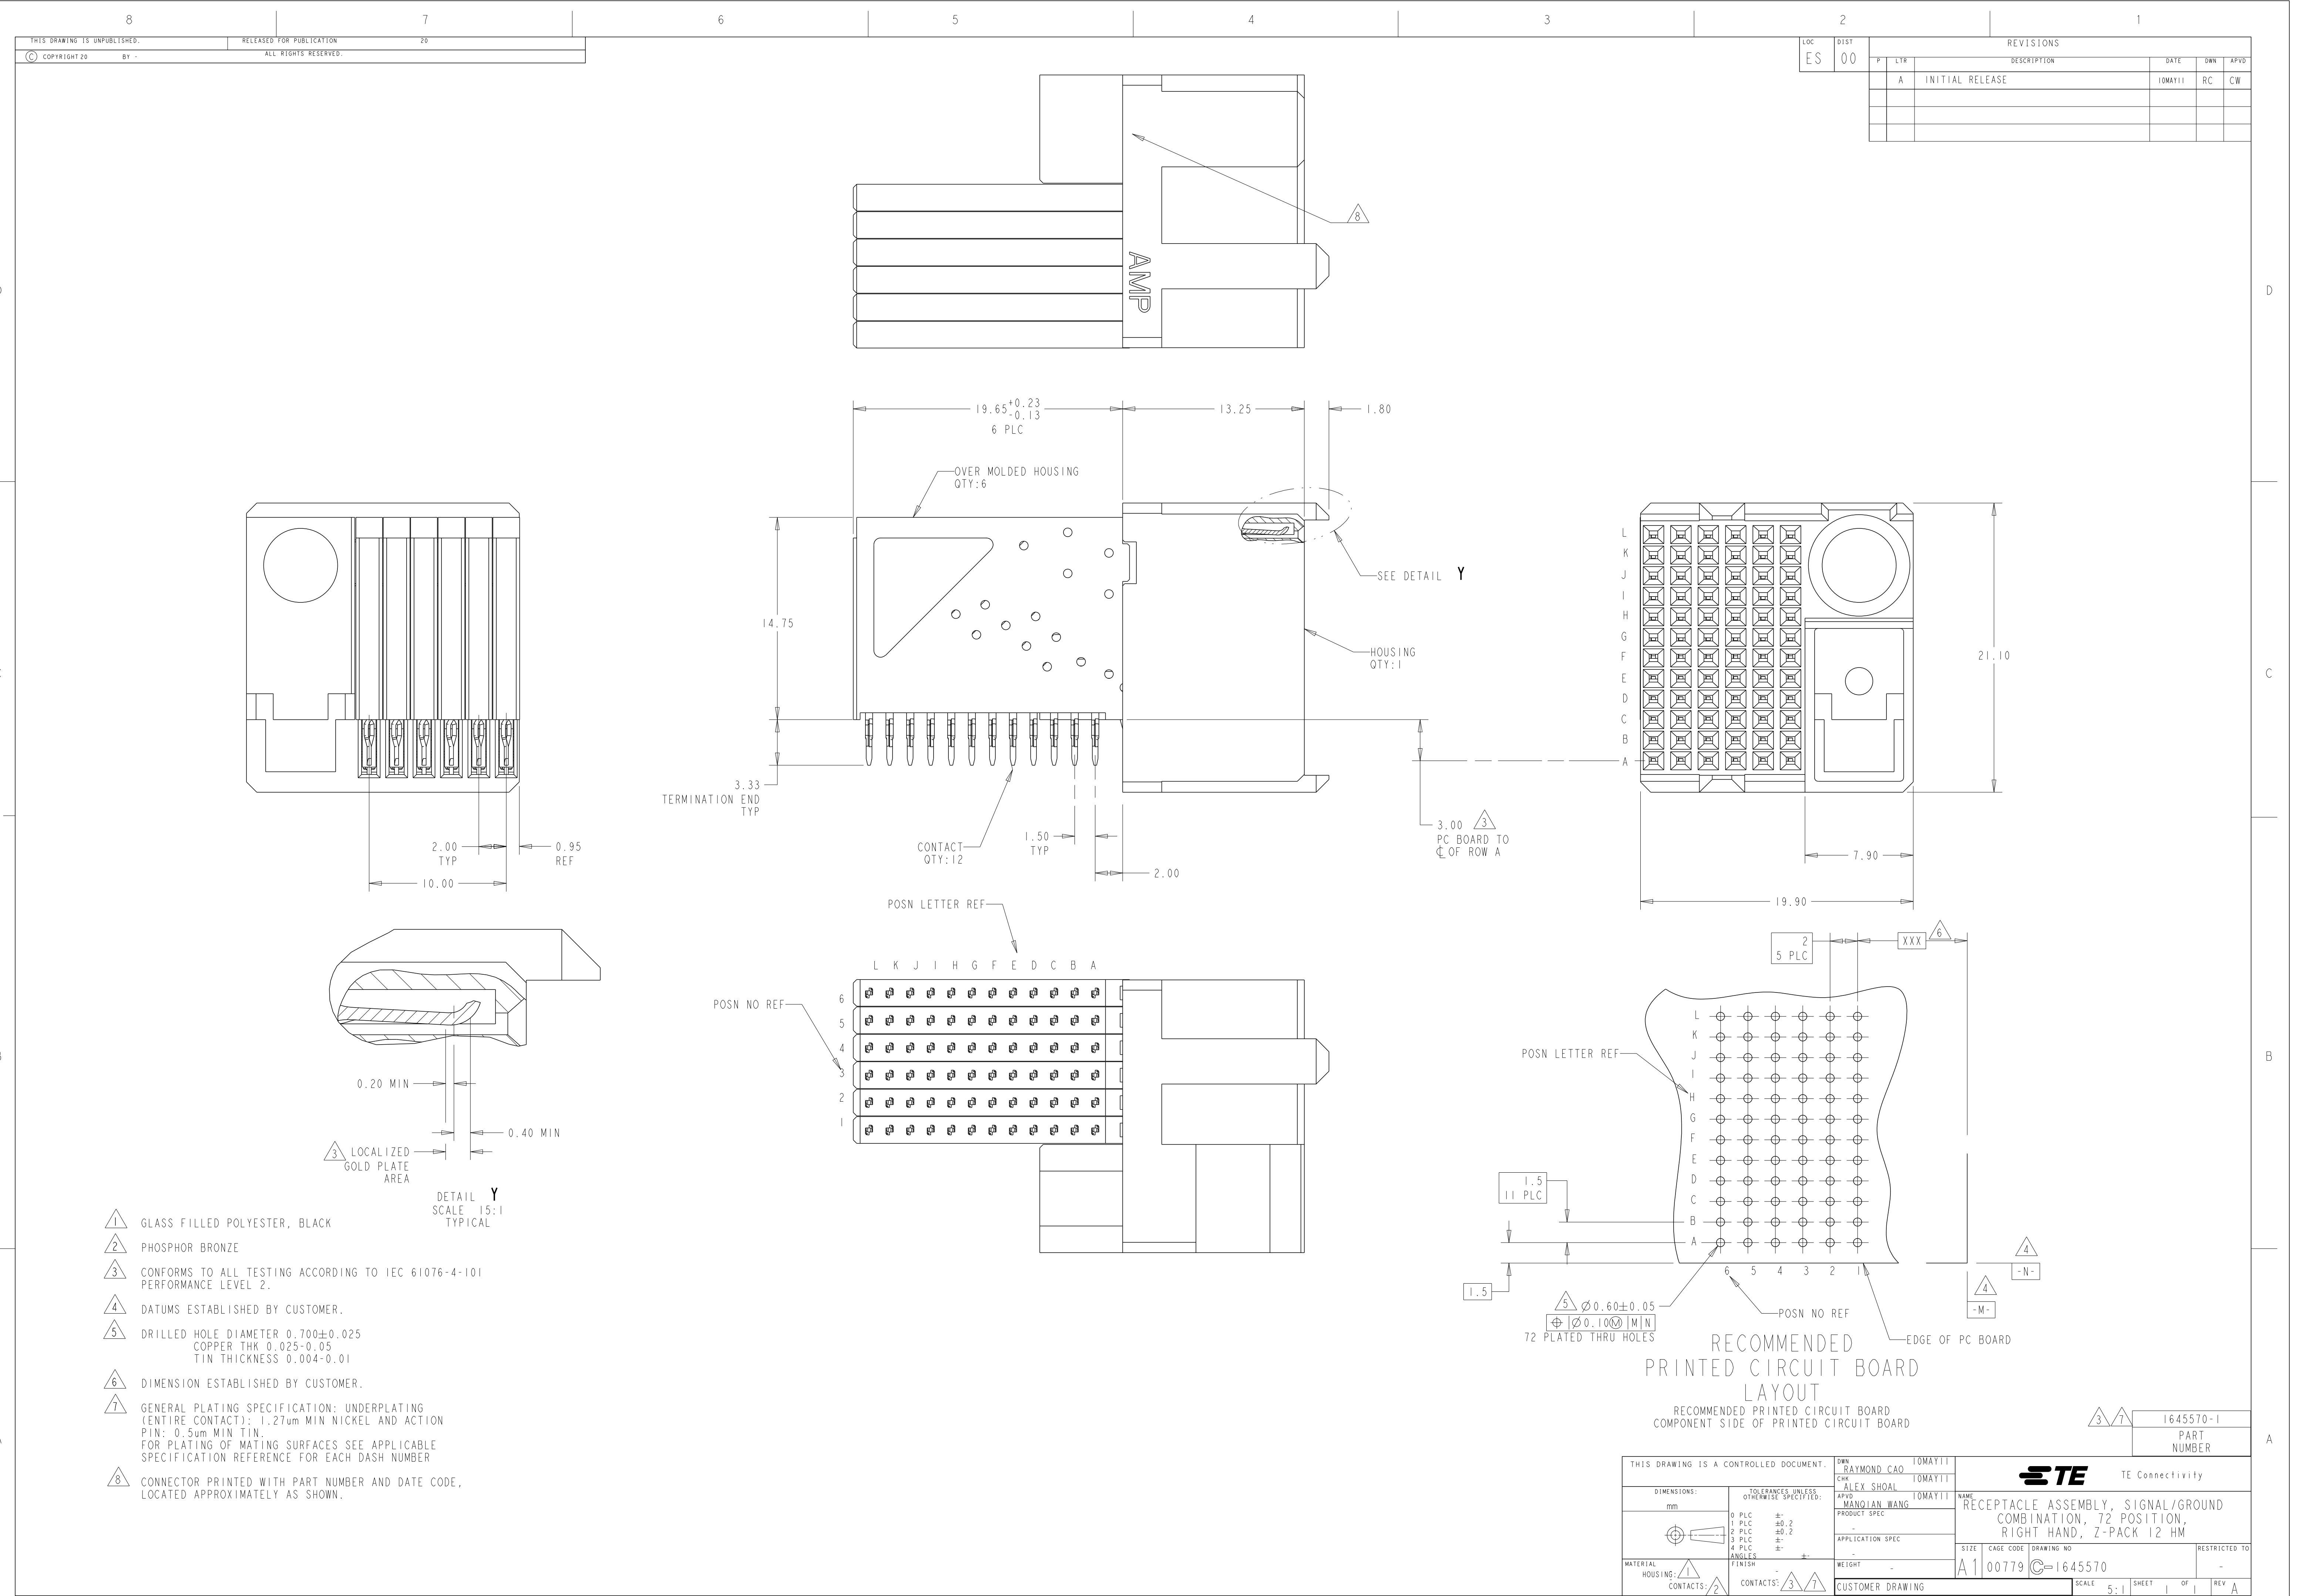


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	A	INITIAL RELEASE		10MAY11	RC	CW	

- 1 GLASS FILLED POLYESTER, BLACK
- 2 PHOSPHOR BRONZE
- 3 CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4 DATUMS ESTABLISHED BY CUSTOMER.
- 5 DRILLED HOLE DIAMETER 0.700±0.025
COPPER THK 0.025-0.05
TIN THICKNESS 0.004-0.01
- 6 DIMENSION ESTABLISHED BY CUSTOMER.
- 7 GENERAL PLATING SPECIFICATION: UNDERPLATING
(ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION
PIN: 0.5µm MIN TIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER
- 8 CONNECTOR PRINTED WITH PART NUMBER AND DATE CODE,
LOCATED APPROXIMATELY AS SHOWN.

DETAIL Y
SCALE 15:1
TYPICAL

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT

RECOMMENDED PRINTED CIRCUIT BOARD
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

THIS DRAWING IS A CONTROLLED DOCUMENT.				OWN RAYMOND CAO		10MAY11		 TE Connectivity	
				CHK ALEX SHOAL		10MAY11			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD MANQIAN WANG		10MAY11		NAME RECEPTACLE ASSEMBLY, SIGNAL/GROUND COMBINATION, 72 POSITION, RIGHT HAND, Z-PACK 12 HM	
mm				PRODUCT SPEC					
		0 PLC ±.2 2 PLC ±0.2 2 PLC ±0.2 2 PLC ±.2 2 PLC ±.2 2 PLC ±.2		APPLICATION SPEC				SIZE CASE CODE DRAWING NO	
MATERIAL HOUSING: 		ANGLES		WEIGHT		A1		00779 C1645570	
CONTACTS: 		FENISH						RESTRICTED TO	
CONTACTS: 									
CUSTOMER DRAWING						SCALE 5:1		SHEET 1 OF 1 REV A	