

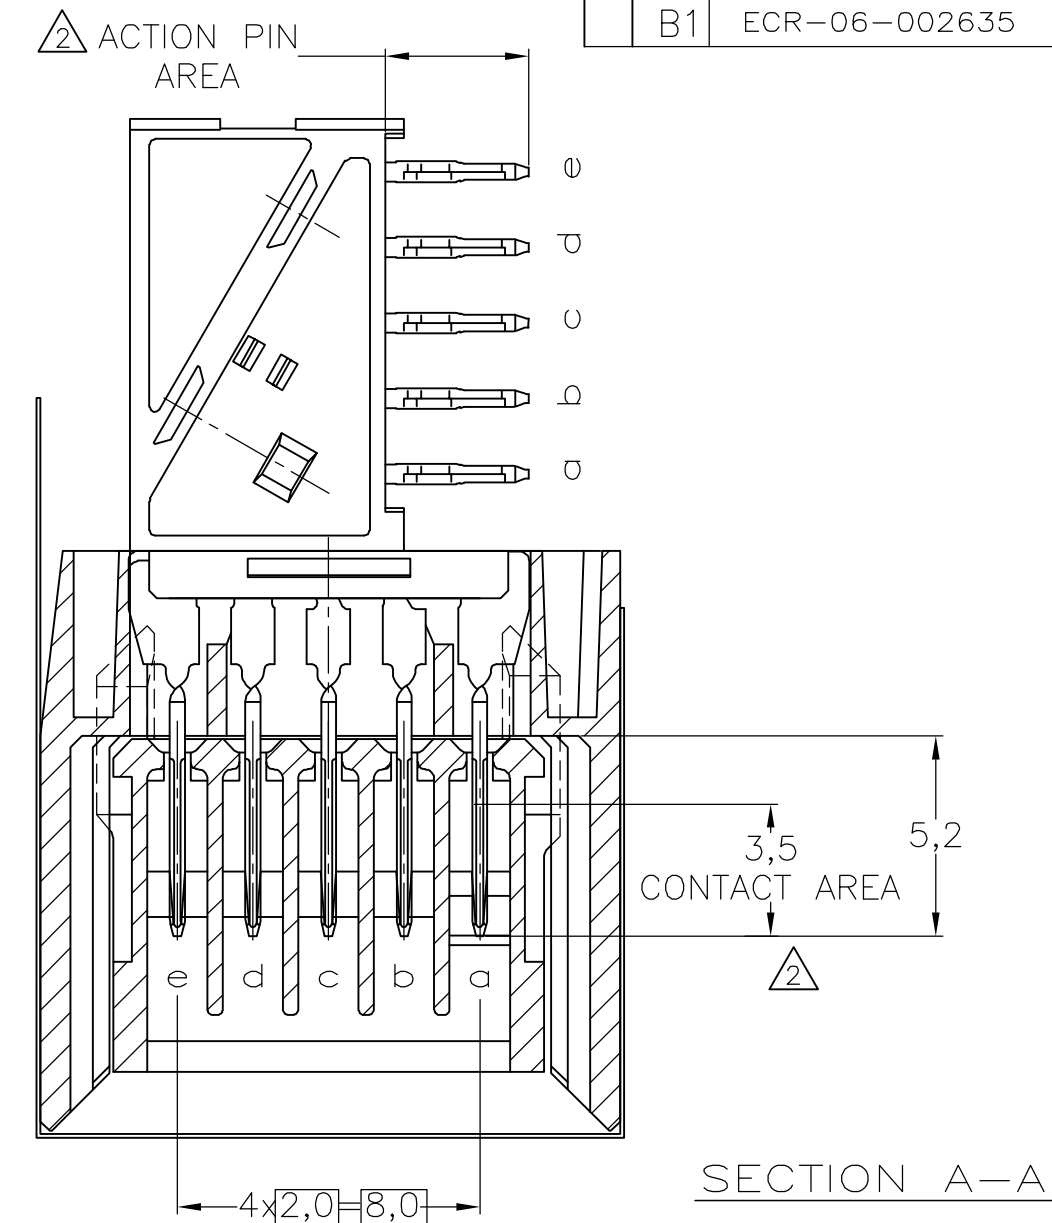


LOC	DIST	REVISIONS					
H	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	SR10-0116-03	10-04-03	DP	—
			B	EH10-0680-05	06-06-05	BSV	BM
			B1	ECR-06-002635	07-02-06	BSV	BM

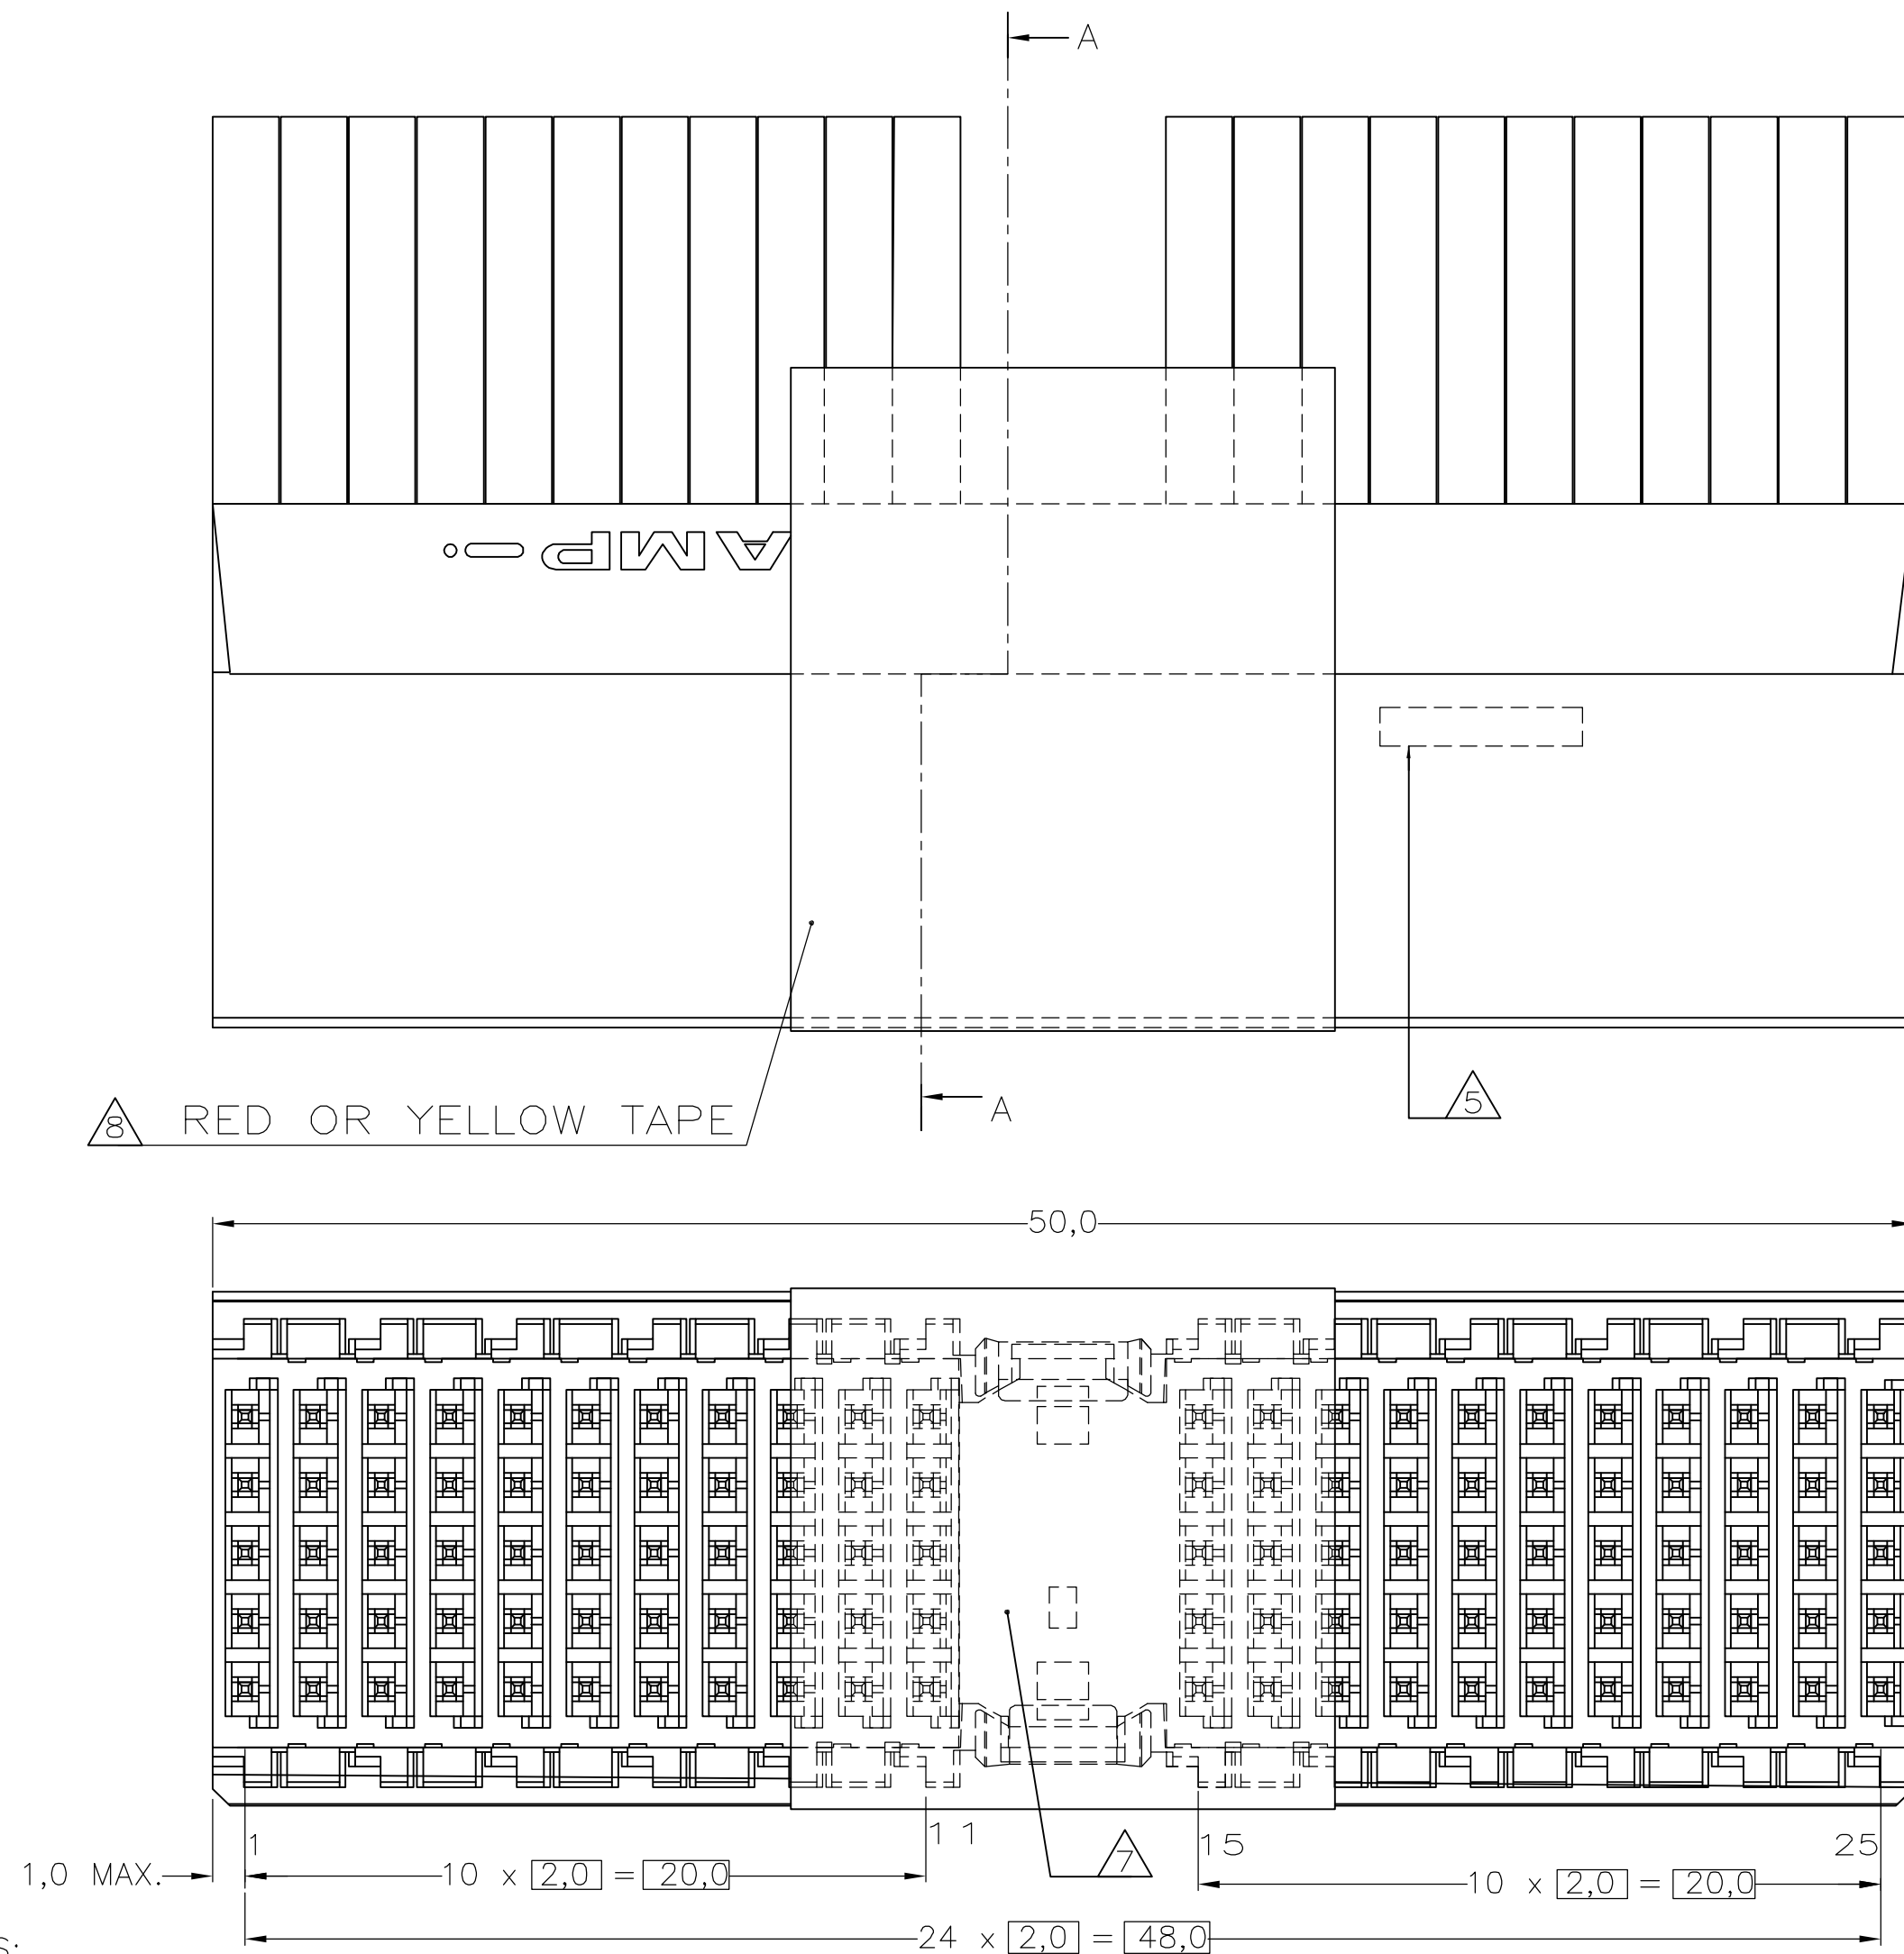



		a	b	c	d	e
1		1	1	1	1	1
2		1	1	1	1	1
3		1	1	1	1	1
4		1	1	1	1	1
5		1	1	1	1	1
6		1	1	1	1	1
7		1	1	1	1	1
8		1	1	1	1	1
9		1	1	1	1	1
10		1	1	1	1	1
11	1	1	1	1	1	
	MULTI PURPOSE CENTRE					
15		1	1	1	1	1
16		1	1	1	1	1
17		1	1	1	1	1
18		1	1	1	1	1
19		1	1	1	1	1
20		1	1	1	1	1
21		1	1	1	1	1
22		1	1	1	1	1
23		1	1	1	1	1
24		1	1	1	1	1
25		2	2	2	2	2

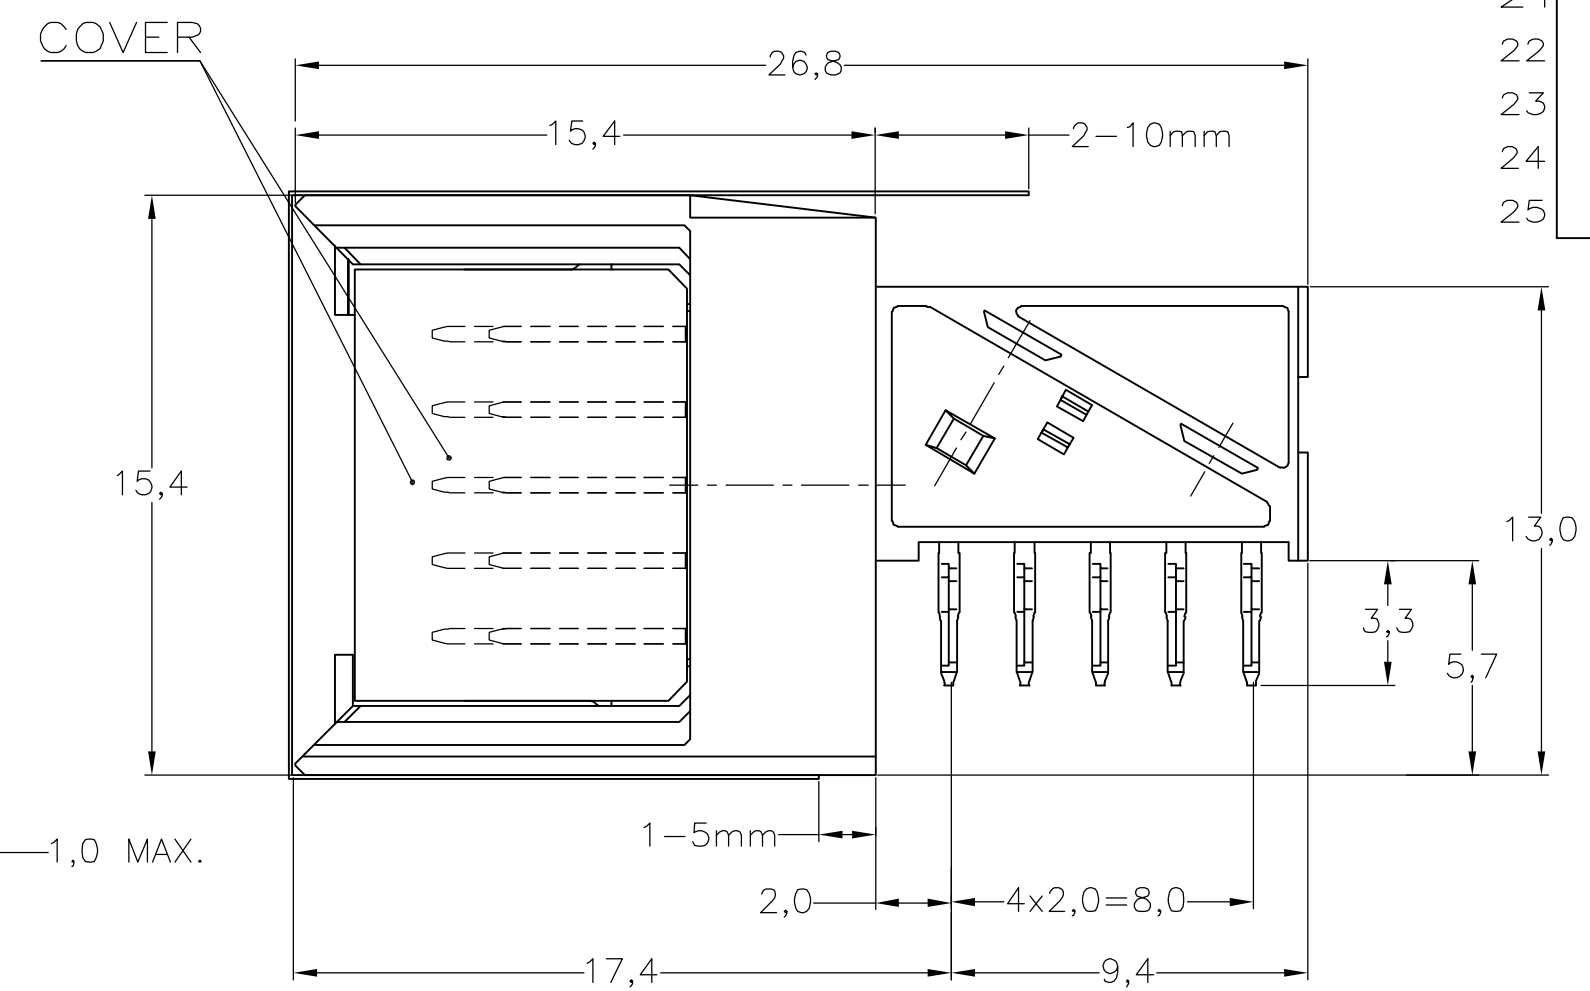

NOTES:

- ① MATERIAL CONTACT; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER,
UL94-V0 (GRAY)
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN-LEAD MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
- ③ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ④ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE APPROVED LUBRICANT.
- ⑤ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE
- ⑥ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
110 HOLES.
- ⑦ AREA RESERVED FOR KEYING PART (BASIC P.N. 100525)
- ⑧ TAPE TO FIX COVER, HAS TO BE REMOVED BEFORE MATING.

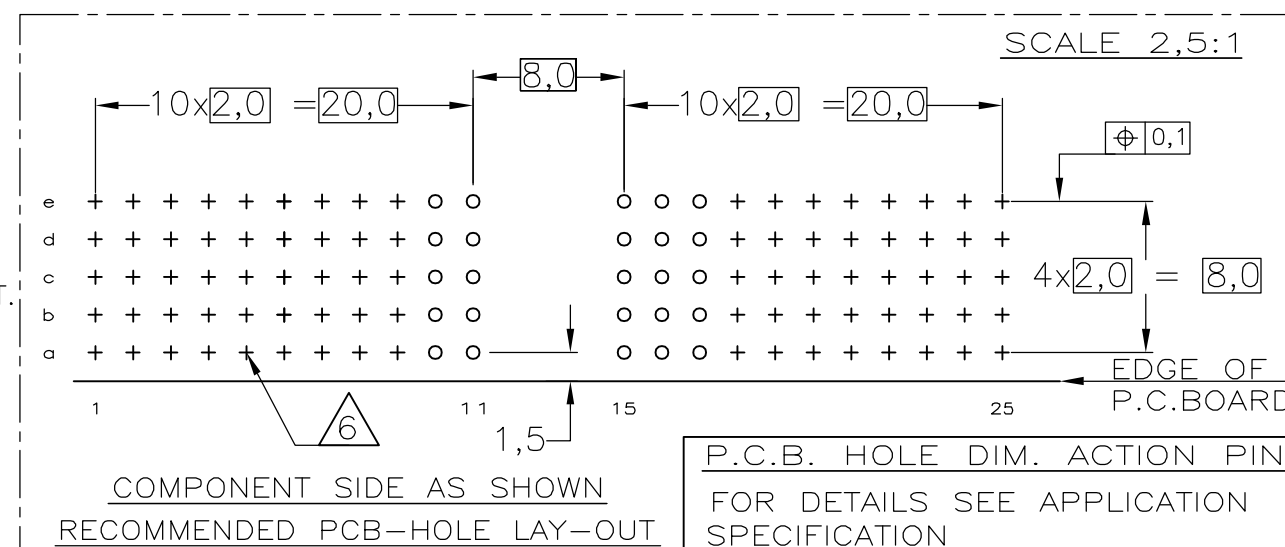

					
		FINISH		MATERIAL	
				PARTNUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 090CT99		 Tyco Electronics Corporation s—HertogenBosch, Netherlands,	
		CHK — 090CT99			
DIMENSIONS: MM		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD —		Z-PACK 2MM HM TYPE A 110 POS. MALE RIGHT ANGLE CONNECTOR WITH PROTECTIVE COVER.	
		PRODUCT SPEC			
		APPLICATION SPEC			
		114-19029			
MATERIAL —		FINISH —		RESTRICTED TO	
		WEIGHT —		SIZE A2	
				CAGE CODE 00779	
				DRAWING NO C-1345154	
				SCALE NTS	
				SHEET 1 OF 1	
				REV R1	
CUSTOMER DRAWING					