



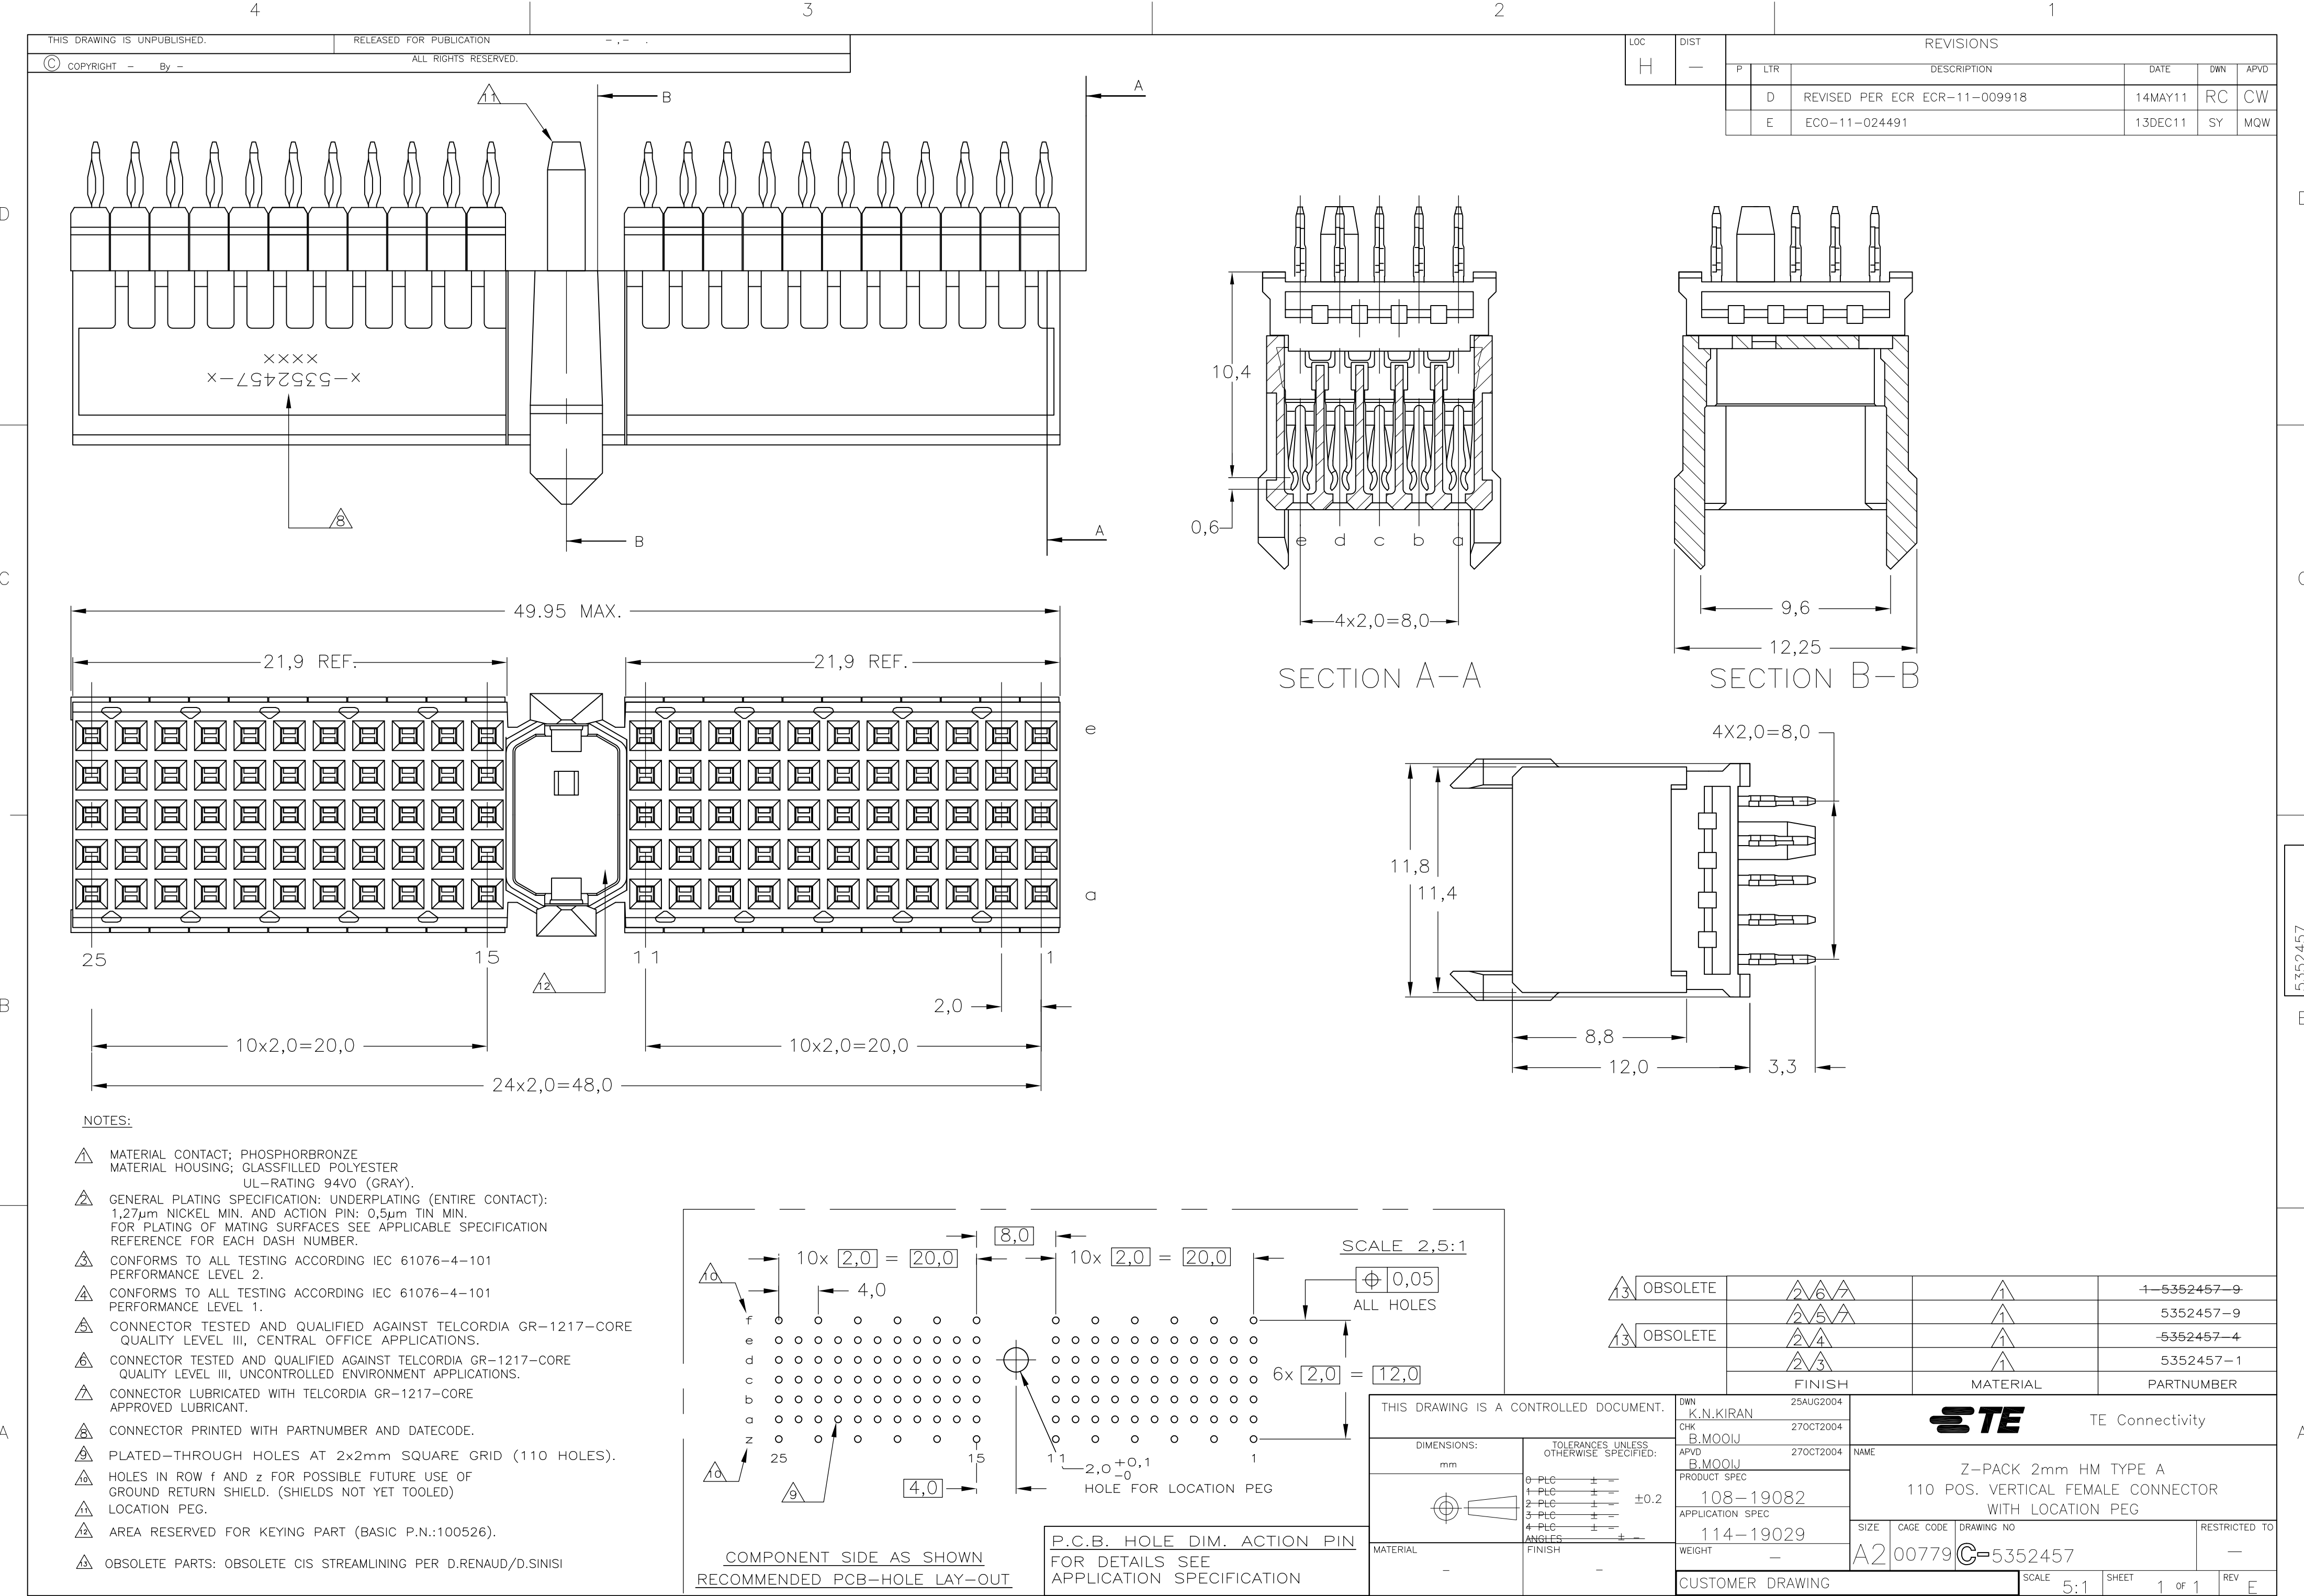

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		D	REVISED PER ECR ECR-11-009918	14MAY11	RC	CW
			E	ECO-11-024491	13DEC11	SY	MQW

- NOTES:
- ⚠ MATERIAL CONTACT; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
 - ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
 - ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
 - ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
 - ⚠ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
 - ⚠ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
 - ⚠ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
 - ⚠ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
 - ⚠ LOCATION PEG.
 - ⚠ AREA RESERVED FOR KEYING PART (BASIC P.N.:100526).
 - ⚠ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

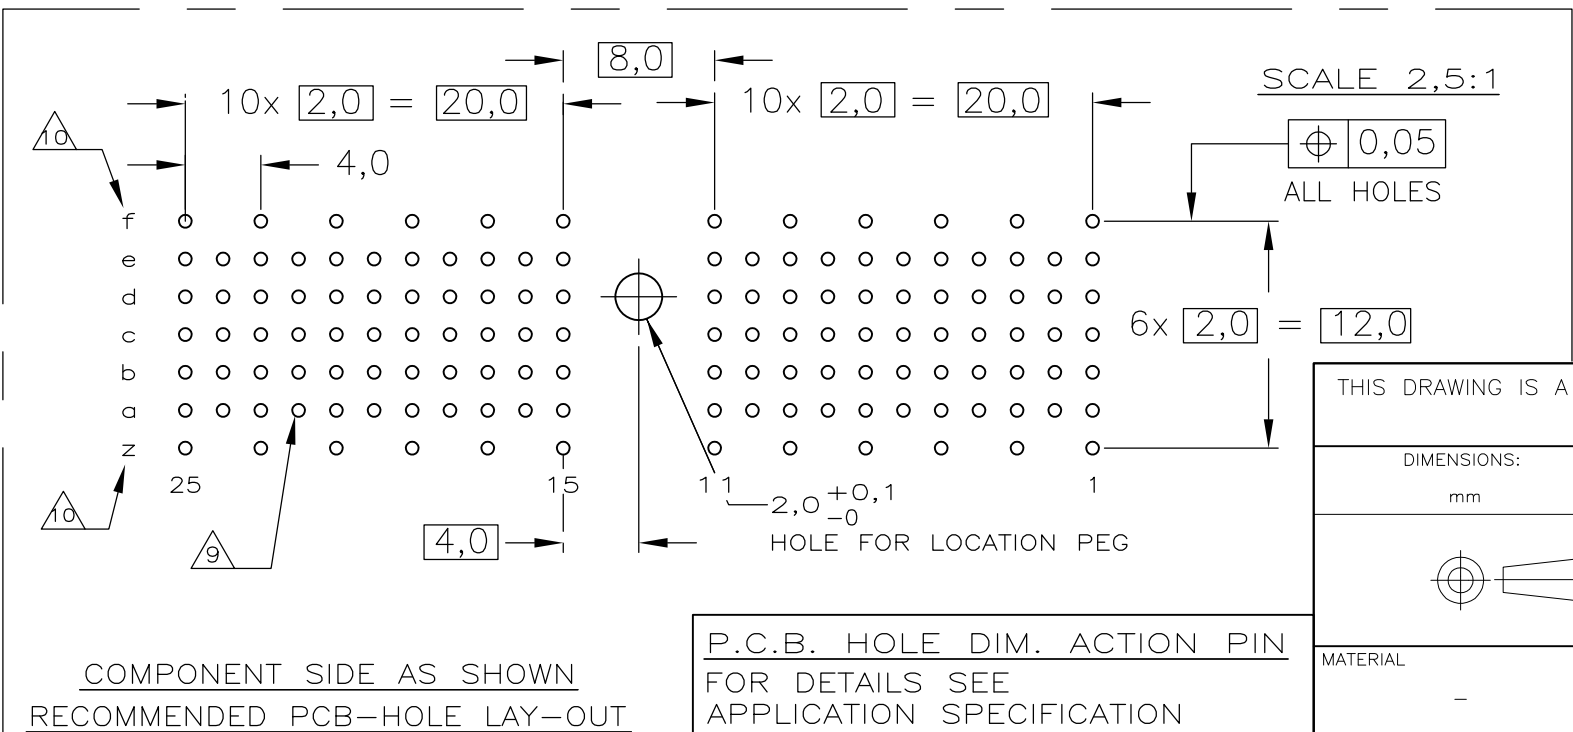

⚠ OBSOLETE	⚠ 6 7	⚠	1-5352457-9
	⚠ 5 7	⚠	5352457-9
⚠ OBSOLETE	⚠ 4	⚠	-5352457-4
	⚠ 3	⚠	5352457-1
FINISH		MATERIAL	PARTNUMBER
DWN 25AUG2004 CHK K.N.KIRAN B.MOOIJ 27OCT2004 APVD B.MOOIJ 27OCT2004 PRODUCT SPEC		TE Connectivity	
108-19082 APPLICATION SPEC		Z-PACK 2mm HM TYPE A 110 POS. VERTICAL FEMALE CONNECTOR WITH LOCATION PEG	
114-19029 WEIGHT -		SIZE A2	RESTRICTED TO -
CUSTOMER DRAWING		CAGE CODE 00779	REV E
		DRAWING NO. C=5352457	
		SCALE 5:1	SHEET 1 of 1