

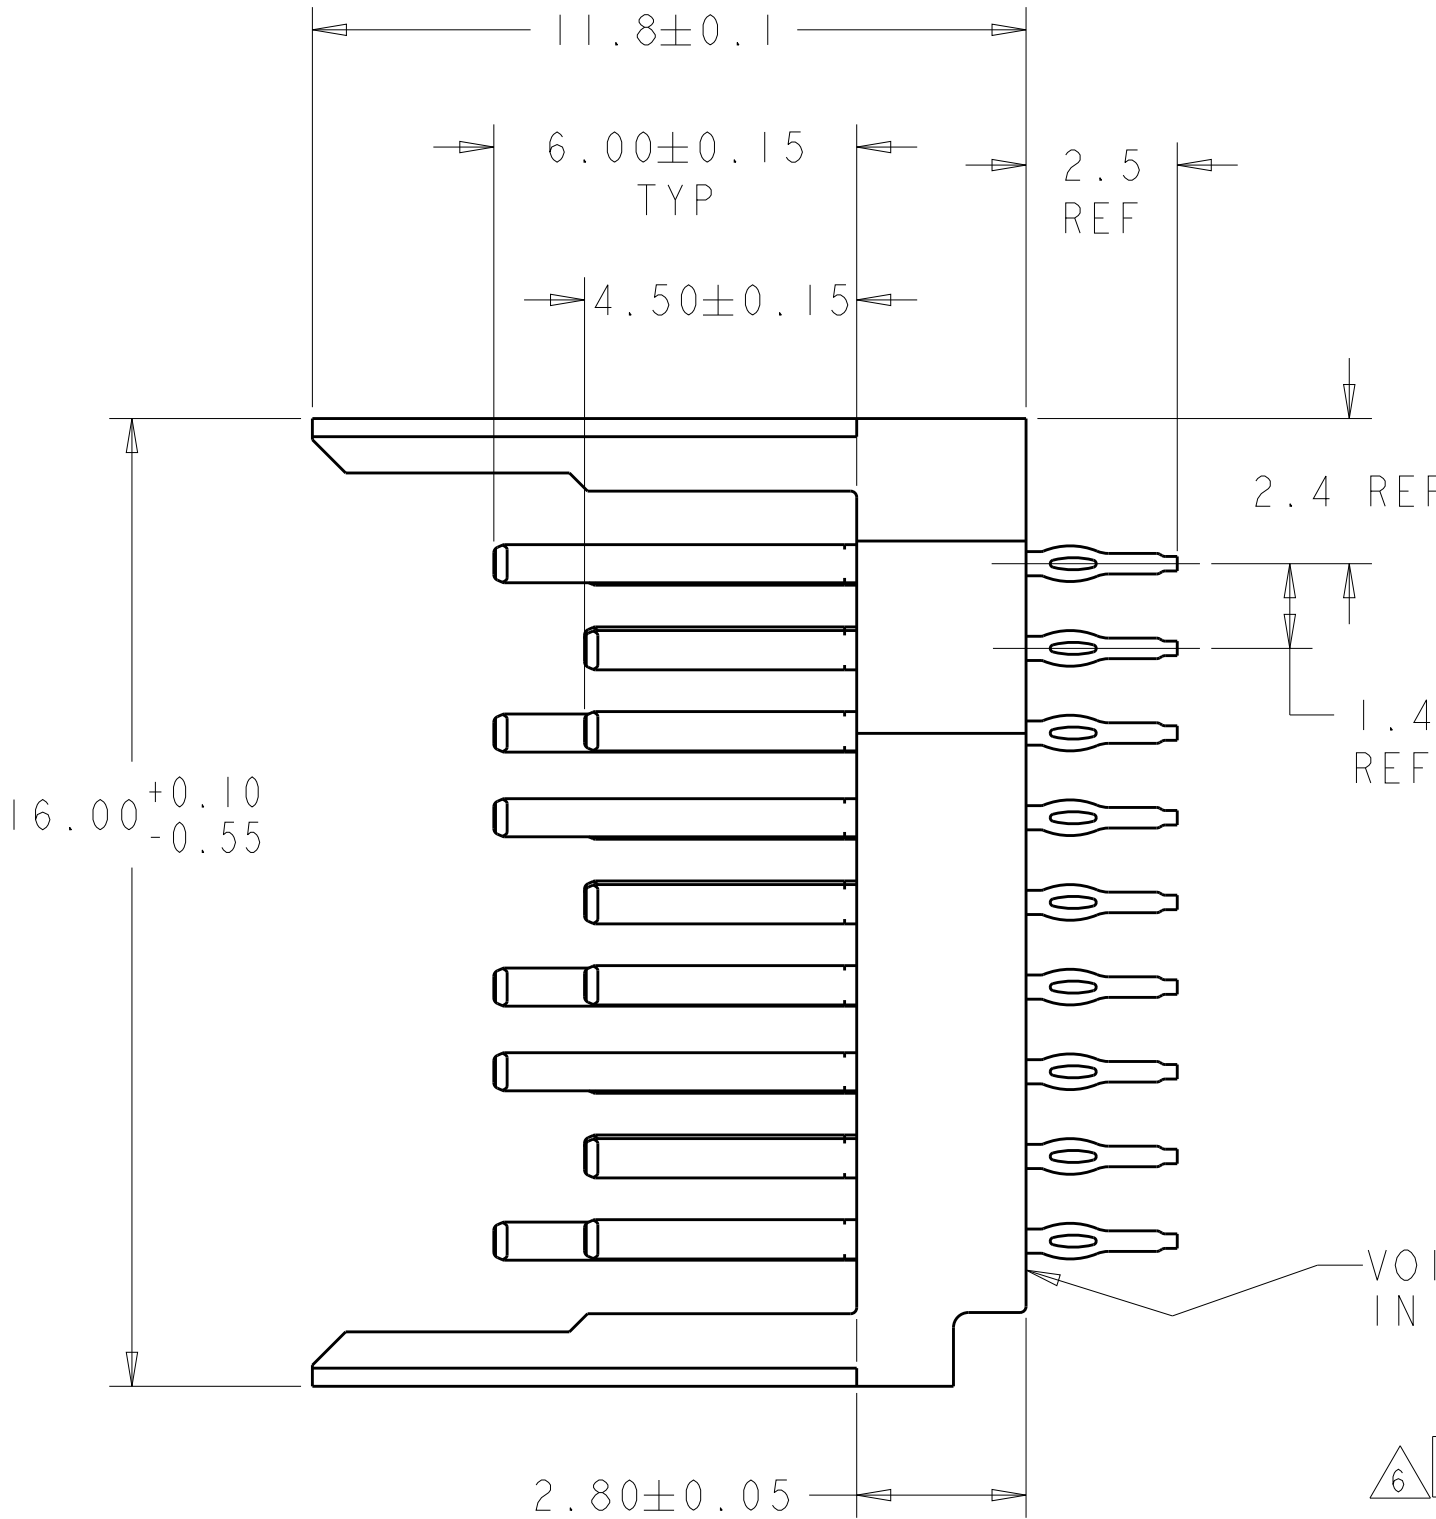
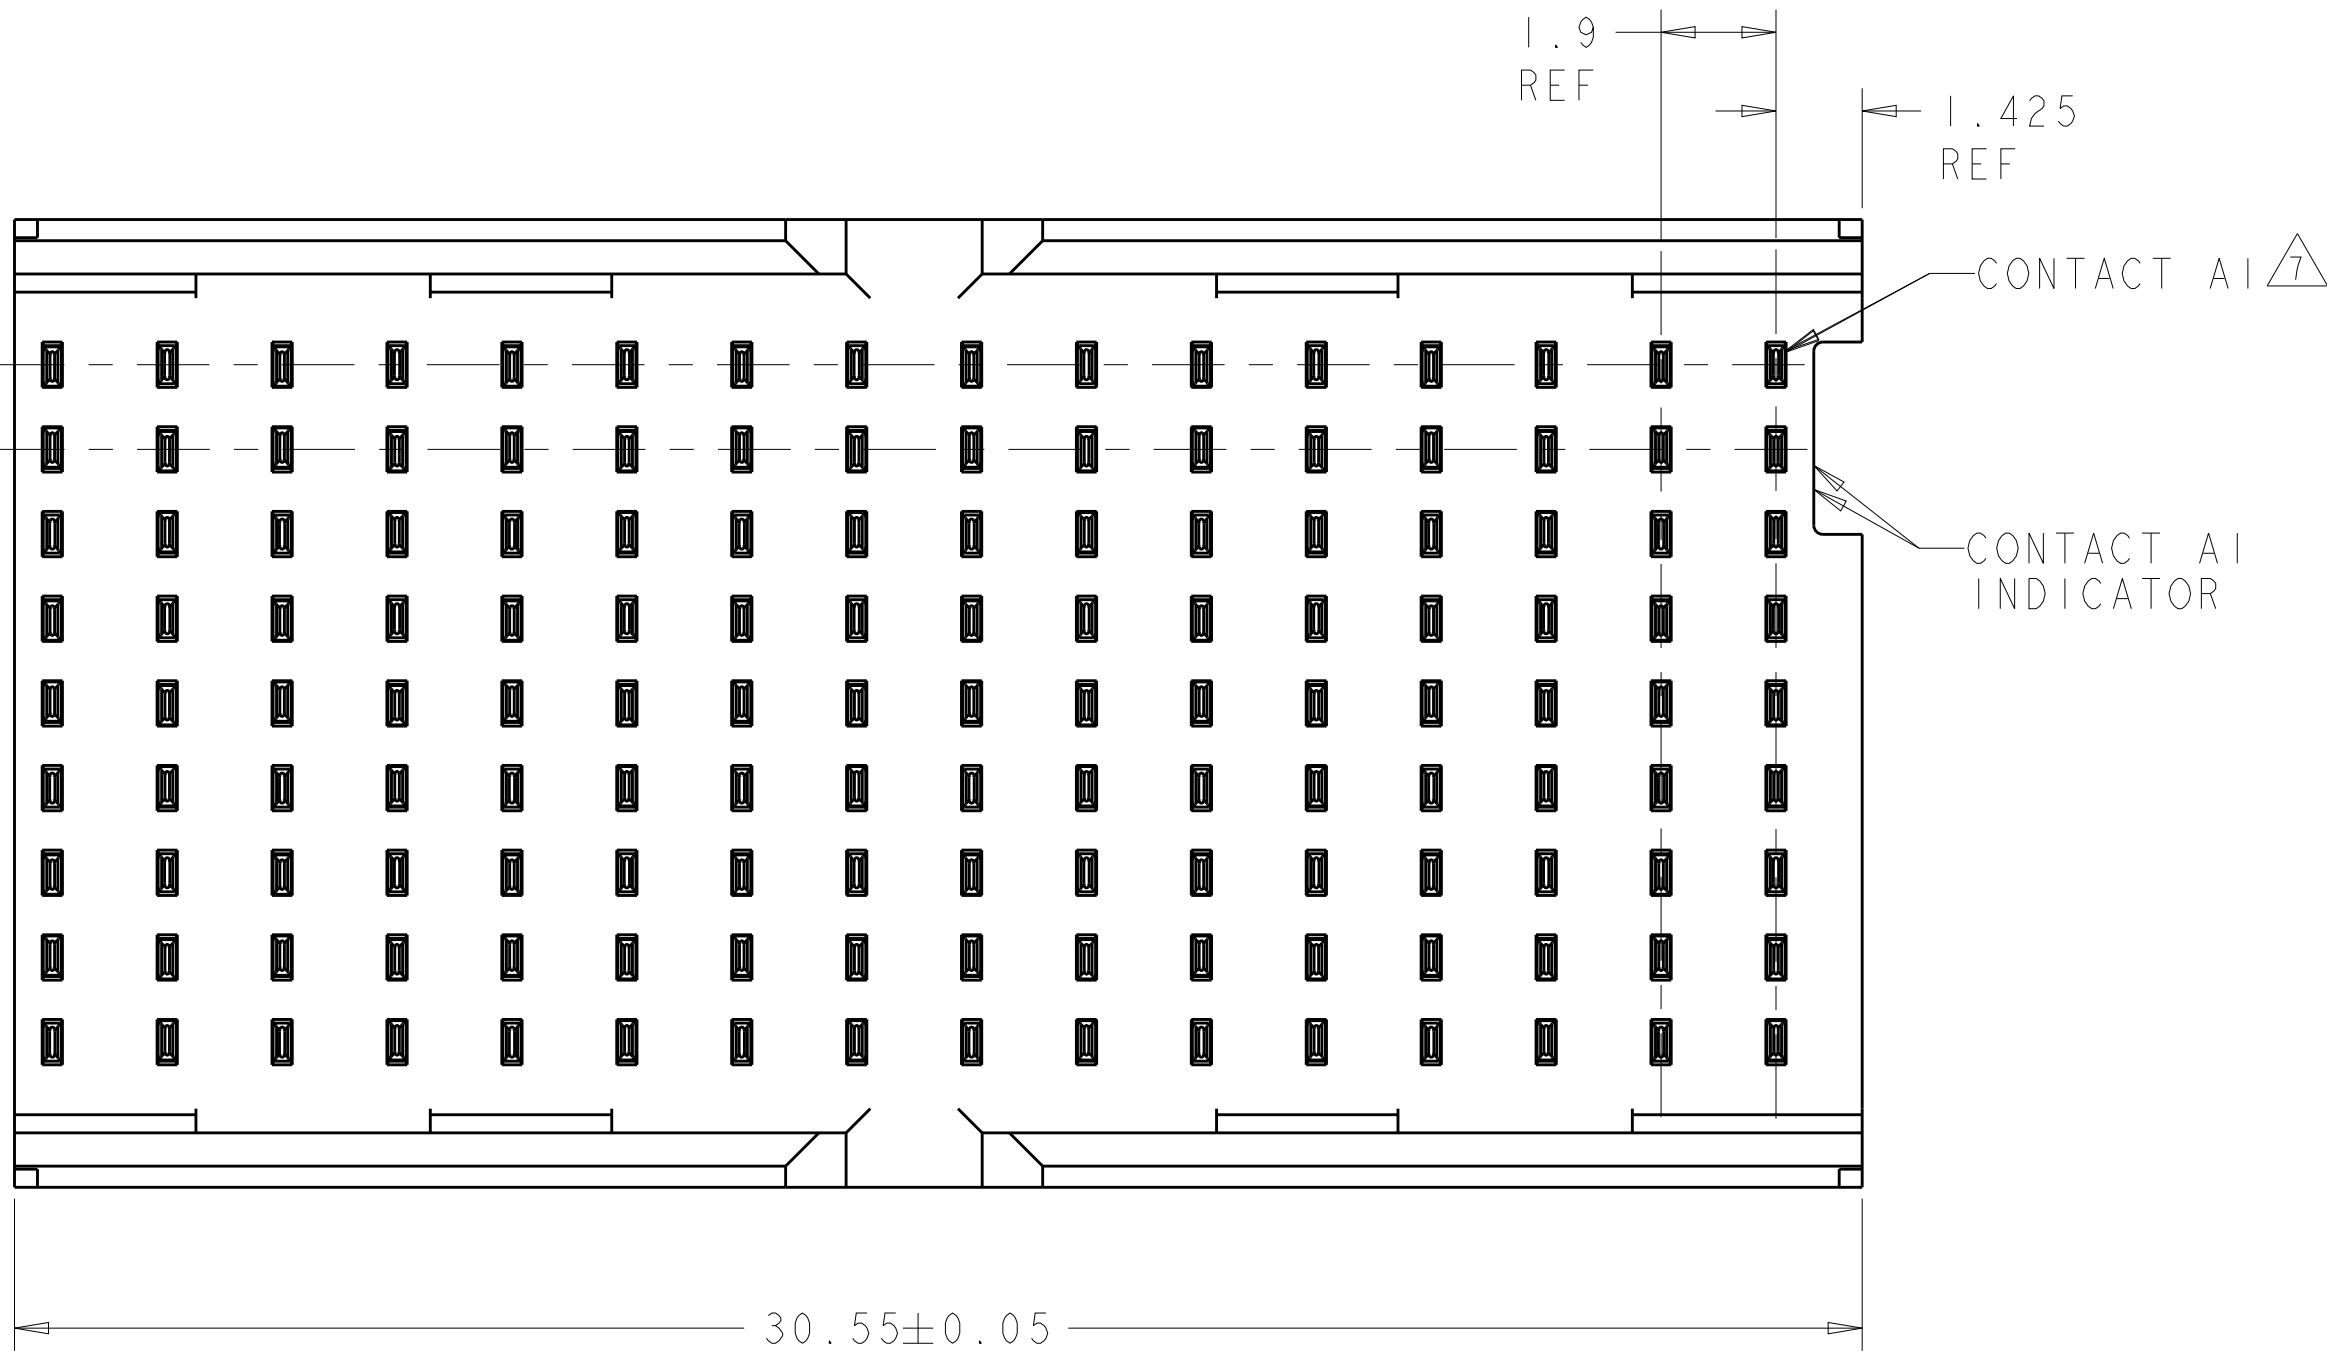


LOC		DIST		REVISONS			
GP	00	P	LTR	DESCRIPTION		DATE	DWN
		D		REVISED PER ECO-13-002771		20MAR2013	KH

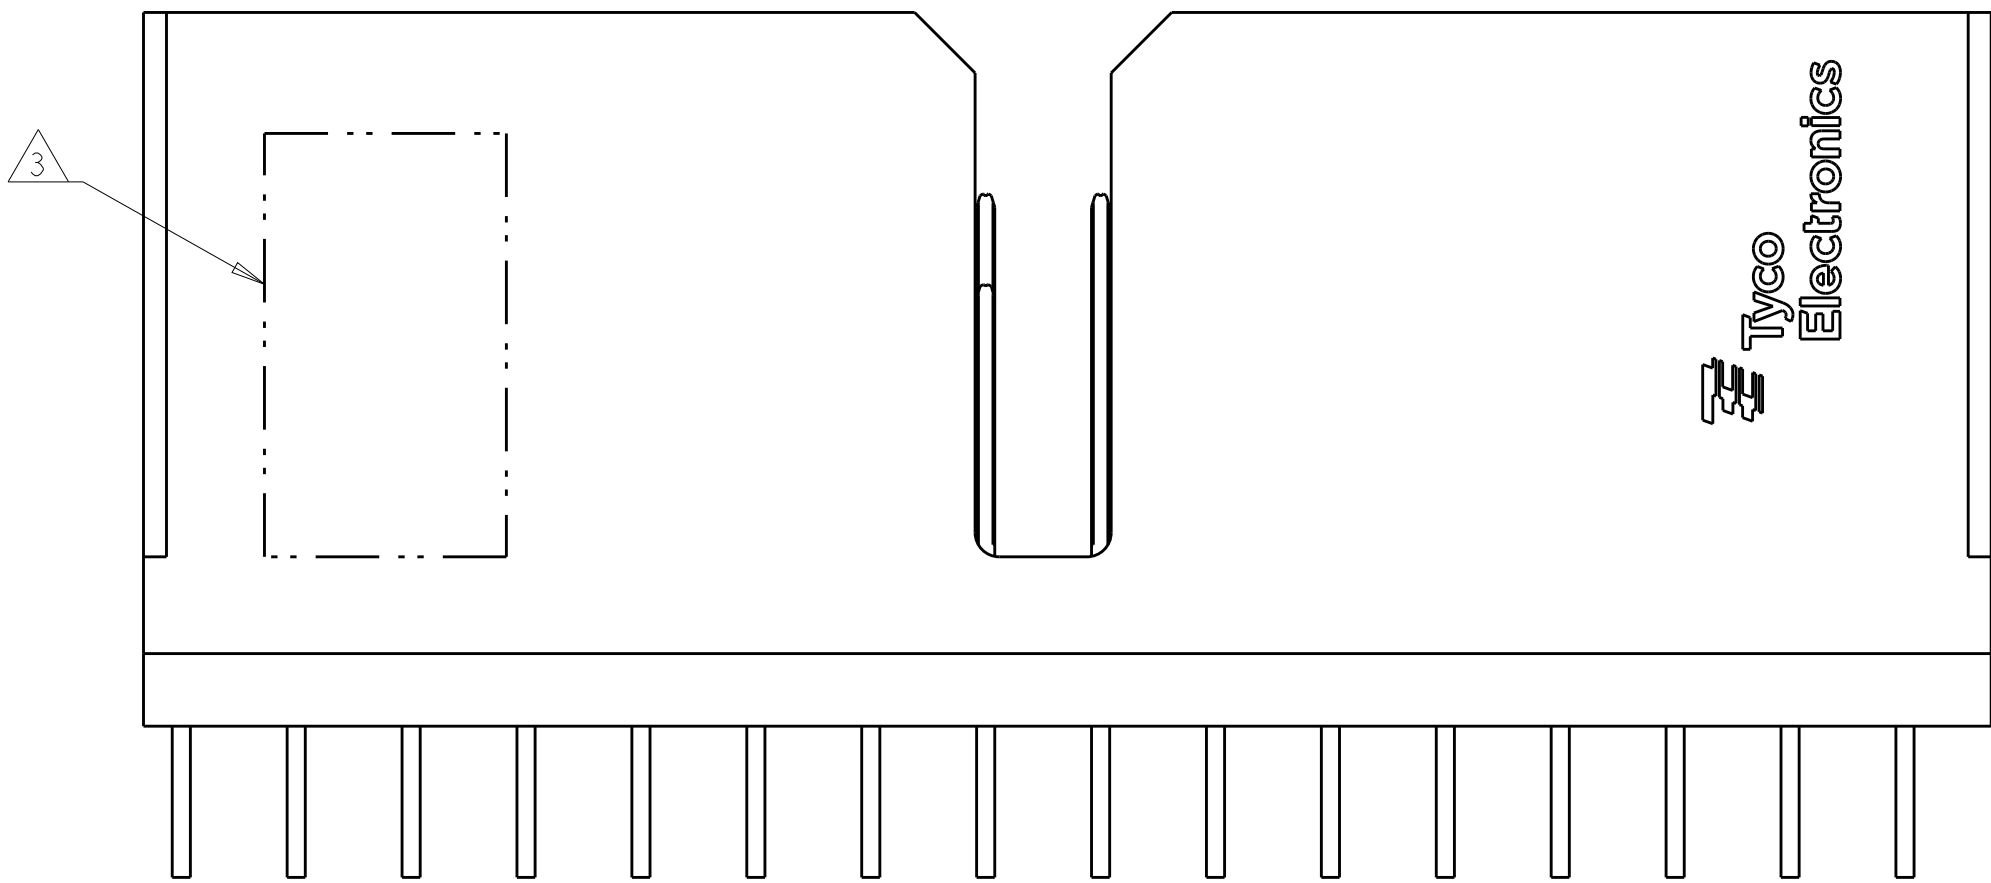

- 1 MATERIAL:
CONTACT - PHOS BRONZE
HOUSING - LCP, UL 94V-0, COLOR - BLACK
- 2 FINISH:
CONTACT AREA FINISH CONFORMS TO THE REQUIREMENTS OF TE PRODUCT SPECIFICATION 108-2303; BASED ON TELCORDIA GR-1217-CORE FOR SYSTEM QUALITY LEVEL III APPLICATIONS IN CONTROLLED ENVIRONMENTS (CENTRAL OFFICE).
COMPLIANT PIN AREA- 0.5µm MIN MATTE TIN OVER 1.27µm MIN NICKEL.
- 3 CONNECTOR MARKED WITH PART NUMBER, DATE CODE AND REVERSE IN APPROXIMATE AREA SHOWN
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
5. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 6 REFERENCE APPLICATION SPEC 114-13202 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESSES.
- 7 FOR MID-PLANE APPLICATIONS, PIN AI WILL MAP TO PIN AI6 OF FRONT SIDE CONNECTOR. REFERENCE APPLICATION SPEC 114-13202.

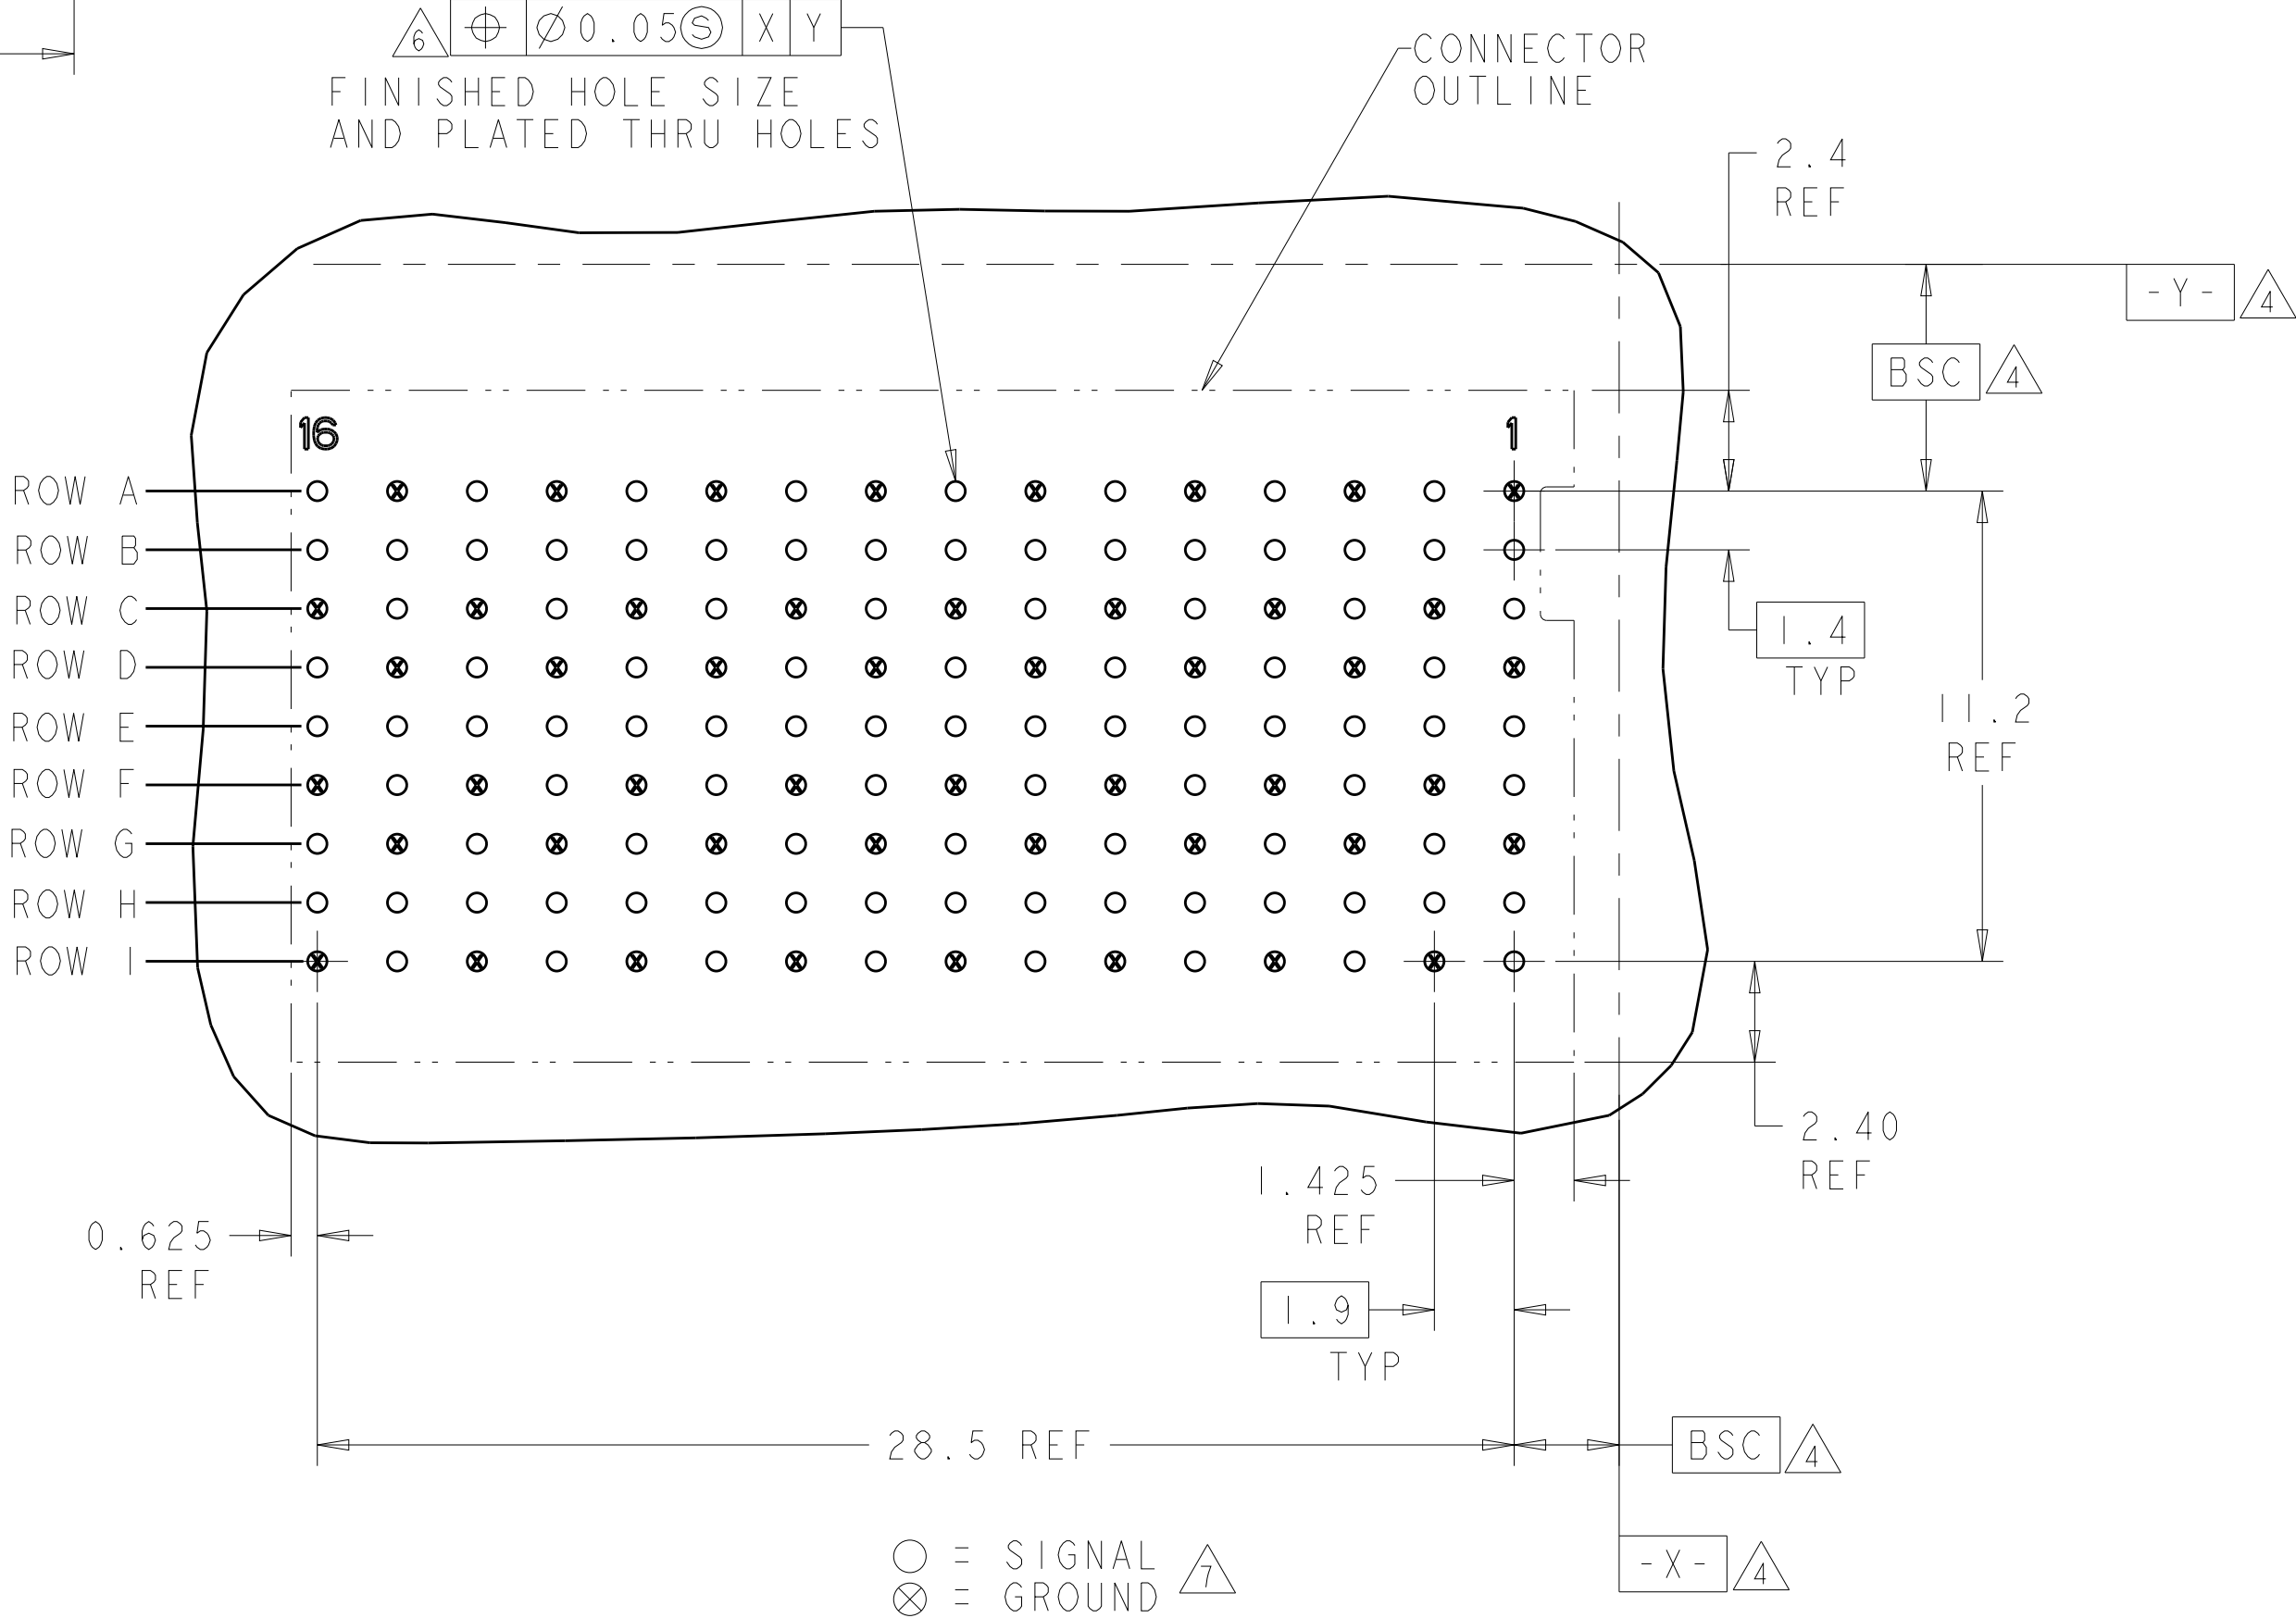

O = SIGNAL
X = GROUND

RECOMMENDED PC BOARD
LAYOUT BACKPLANE,
COMPONENT SIDE SHOWN
SCALE 6:1

2065669-1
PART
NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	B. CARBO	14JAN2009	TE Connectivity		
		CHK	R. PATTERSON	14JAN2009			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	R. PATTERSON	4JAN2009	NAME
mm		0 PLC ±		PRODUCT SPEC			HEADER ASSEMBLY, OPEN ENDED, 3 PAIR, 16 COLUMN, REVERSE LOAD REVERSE LOAD
		1 PLC ±		APPLICATION SPEC			
		2 PLC ±		WEIGHT			SIZE
		3 PLC ±		CUSTOMER DRAWING			
		4 PLC ±		SCALE			SHEET
		ANGLES		8:1			
		FINISH		OF			REV
MATERIAL		- 2		1			
				D			