

REV. A		SHEET 1 OF 2		RVPX-J08EXX	
				DOCUMENT NO.	
REVISIONS M					
LTR		DESCRIPTION			DATE
A		INITIAL RELEASE			11-FEB-16

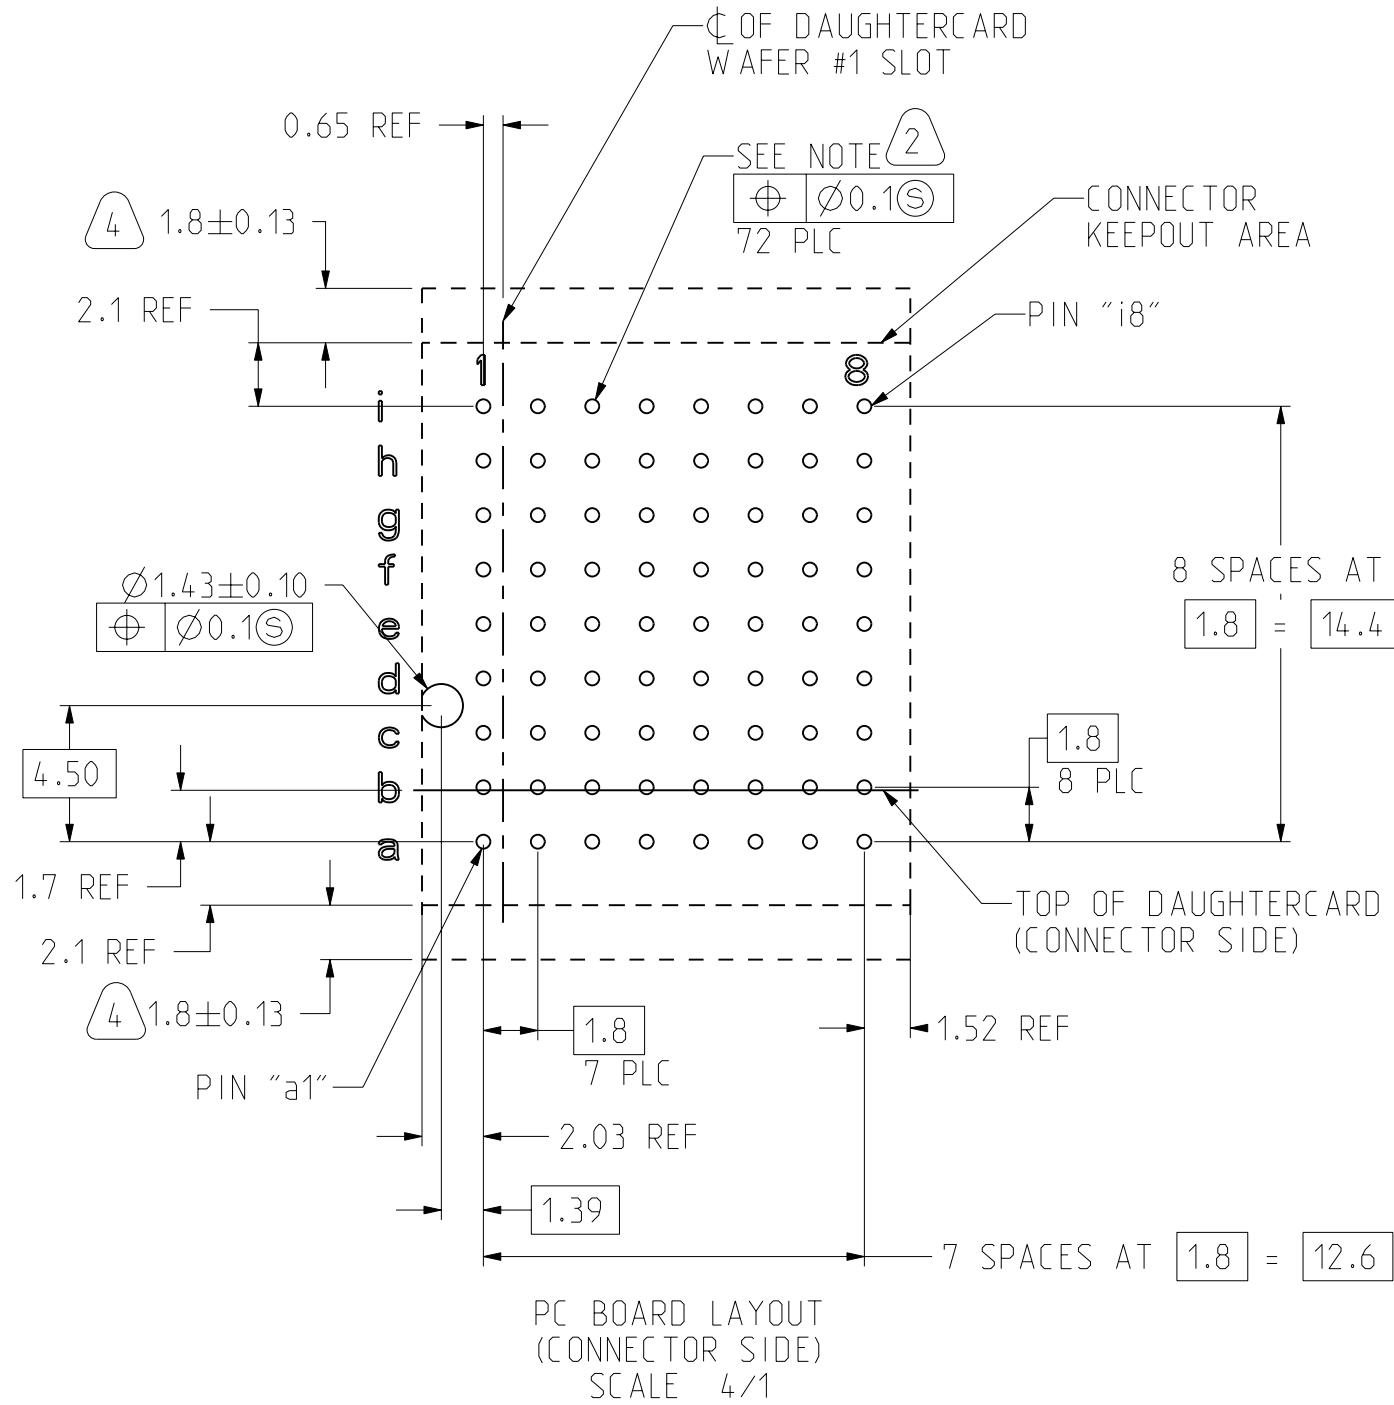
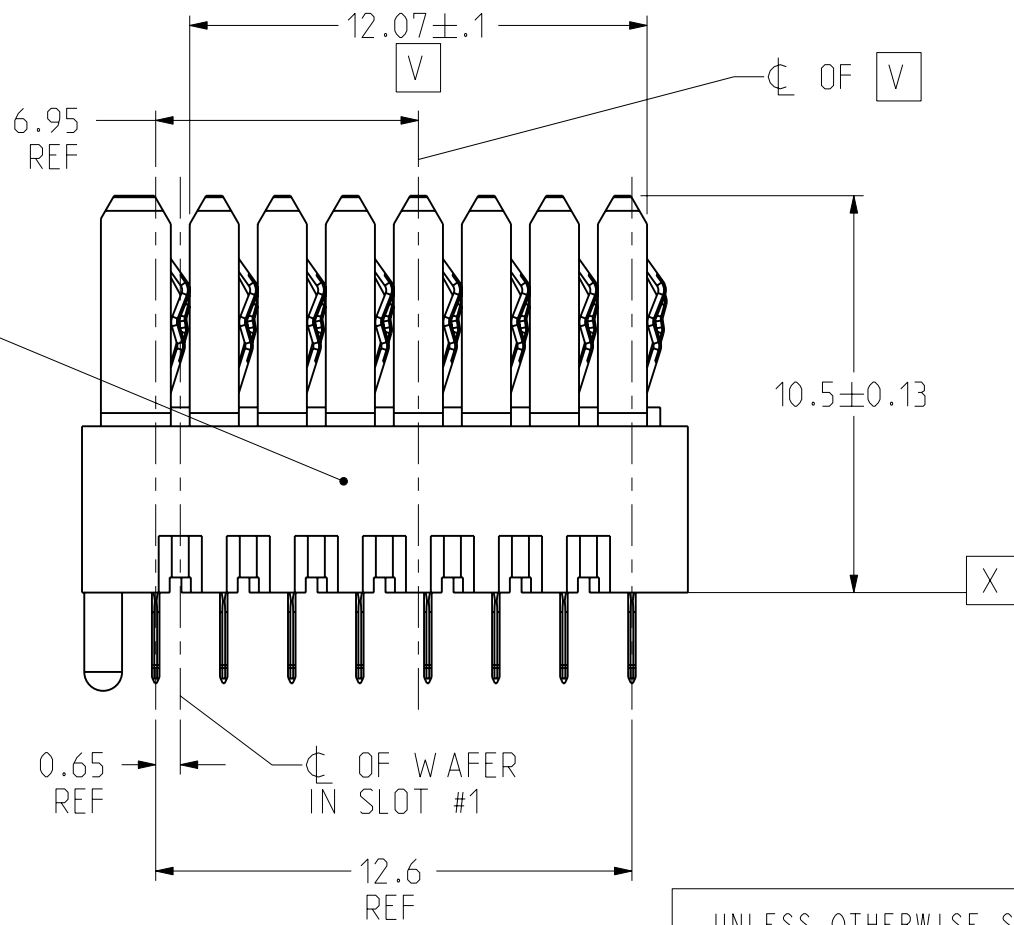
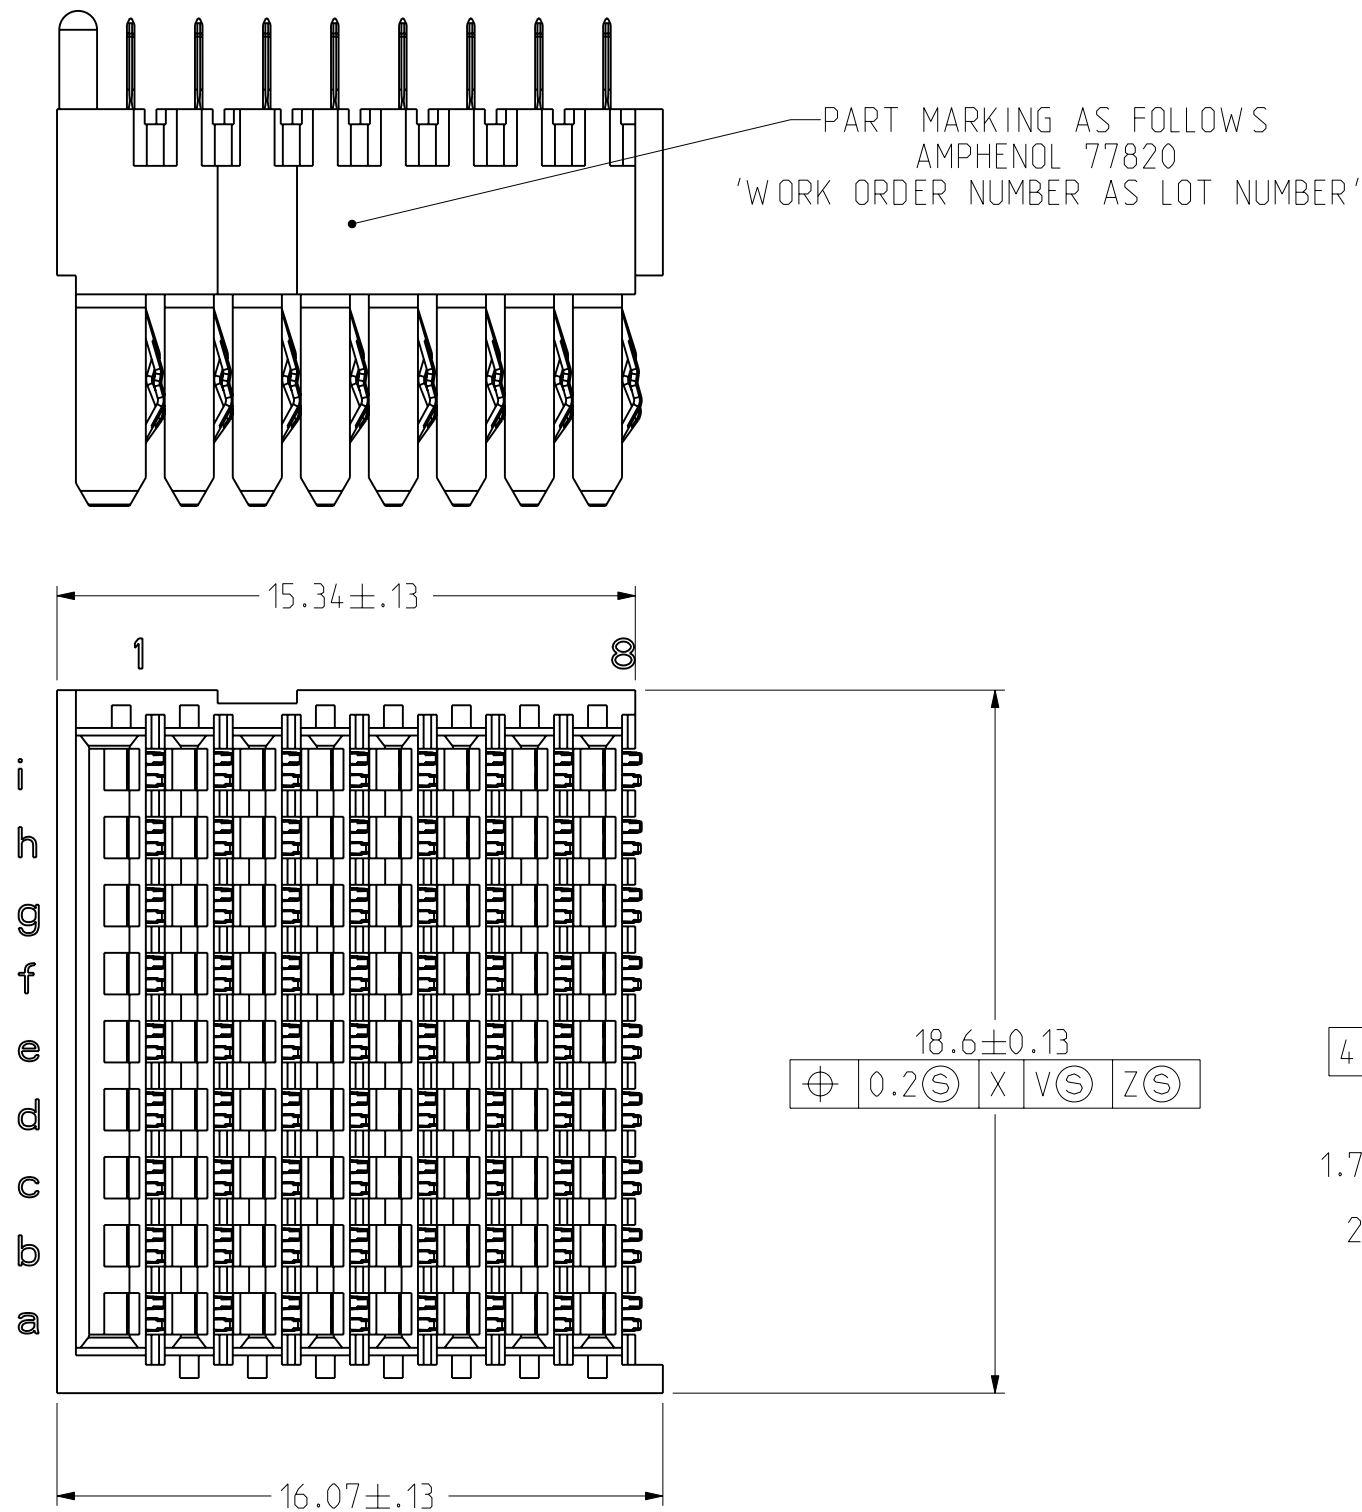
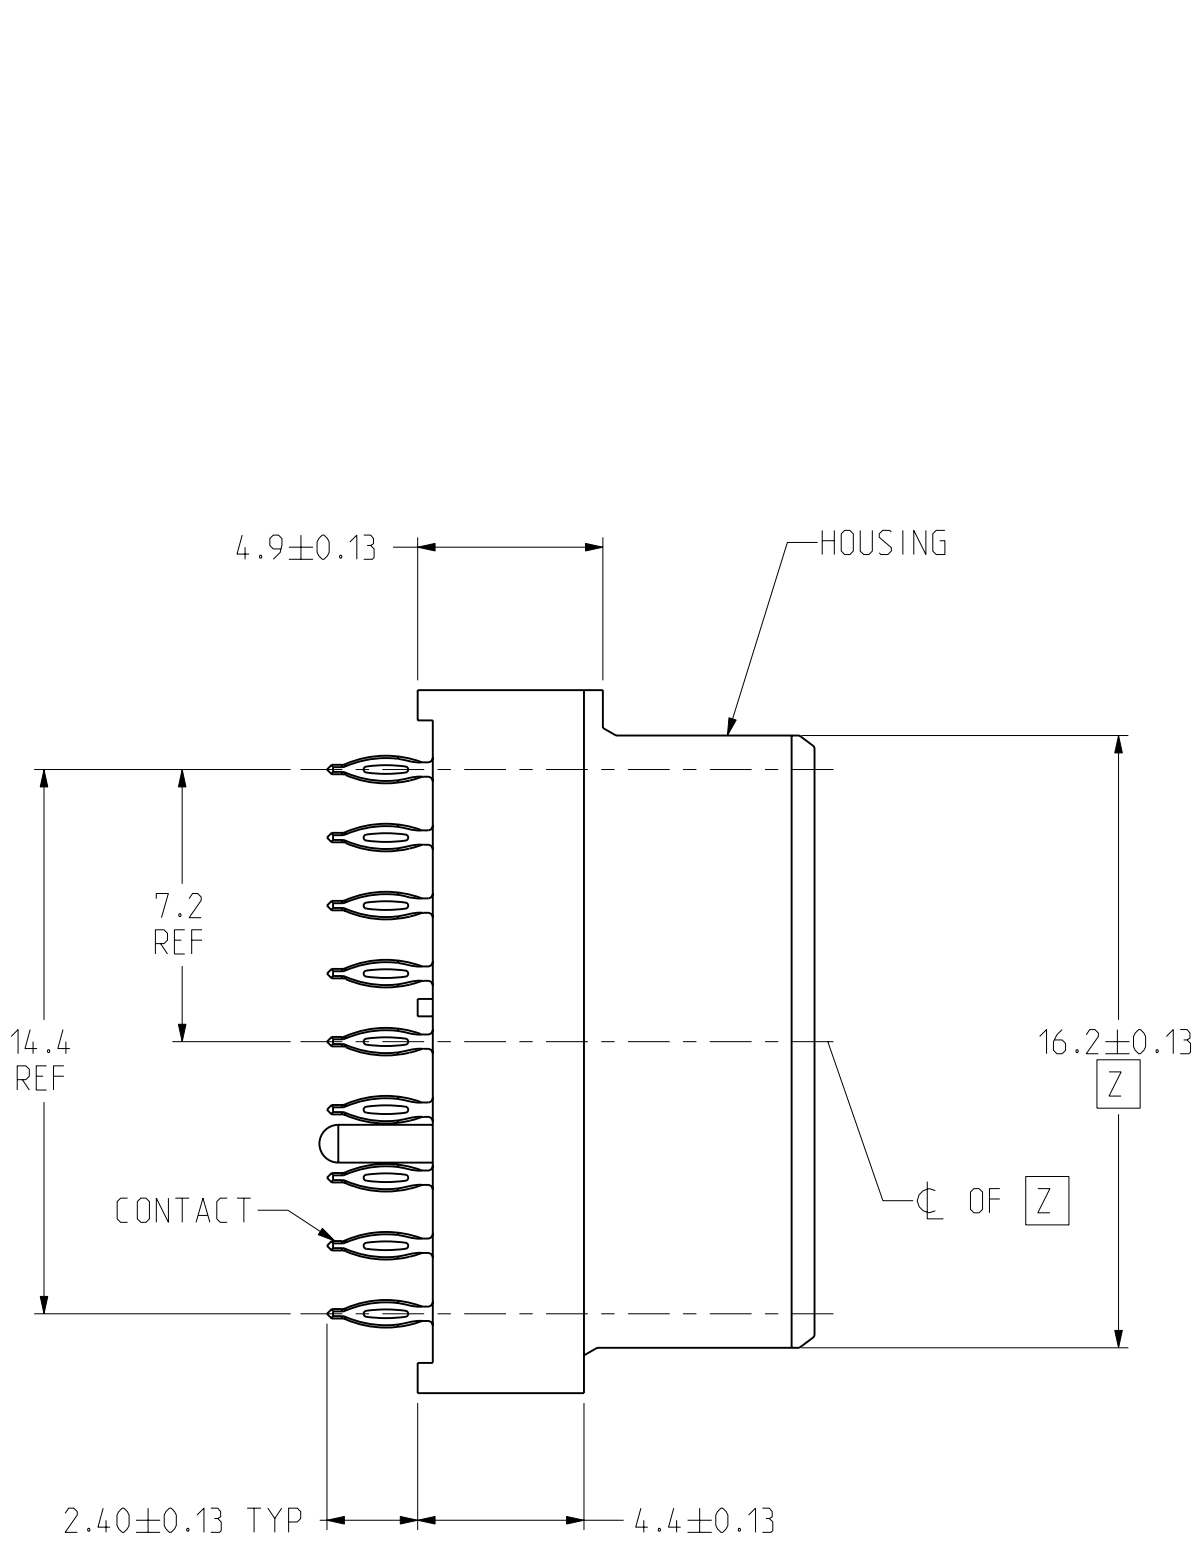


TABLE 1

PLATING THICKNESS AND MATERIAL BY PART NUMBER			
PART NUMBER	GOLD IN CONTACT AREA	COMPLIANT	NICKEL OVERALL
RVPX-J08EM1	50 μ-INCH MIN	50 μ-INCH MIN TIN	50 μ-INCH MIN
RVPX-J08EM2	50 μ-INCH MIN	50 μ-INCH MIN TIN-LEAD	50 μ-INCH MIN
RVPX-J08EC1	30 μ-INCH MIN	50 μ-INCH MIN TIN	50 μ-INCH MIN
RVPX-J08EC2	30 μ-INCH MIN	50 μ-INCH MIN TIN-LEAD	50 μ-INCH MIN

- 4 ADDITIONAL CONNECTOR-SIDE KEEPOUT AREA REQUIRED IF CONNECTOR-SIDE EXTRACTION TOOL IS TO BE USED.
- 3 SEE TABLE 1 FOR PART NUMBER AND FINISHES
- 2 PTH CALLOUT
TYPICAL HOLE
Ø0.63-.67 DRILL
Ø0.56 ±.05 FINISH HOLE
Ø1.02 PAD
- 1 HOUSING: GLASS FILLED LCP, UL94 - V0
CONTACT: Cu ALLOY

THE USE OF THIS DOCUMENT IS UNLIMITED. HOWEVER, DOCUMENTS REFERENCED HEREON MAY CONTAIN LIMITED RIGHTS DATA.

N/A

NEXT ASSEMBLY

PRO/ENGINEER INFORMATION

Pro/e Model Used:




RVPX-J08EXX.ASSEM

Drawing Name:

RVPX-J08EXX

UNLESS OTHERWISE SPECIFIED		SPECIFICATIONS		POS	QTY	PART NUMBER	DESCRIPTION	NOTE			
LINEAR DIMENSIONS ARE IN MILLIMETERS TOLERANCES: .XXXX = ± ANGLES= ±2° .XXX = ± .XX = ±.1 .X = ±.13 ----- DIM.& TOL. PER ASME Y14.5M; DRM PER MIL-DTL-31000; OTHER Amphenol Stds. PER 9-3800 LEGENDS: -FLAG NOTE CALL OUT REFERENCE ONLY 		MATERIAL SPEC.		PARTS LIST							
		N/A		APPROVALS		DATE		AMPHENOL CORPORATION 40-60 DELAWARE AVENUE SIDNEY, N.Y. 13838 CONNECTOR ASSEMBLY, BACKPLANE VERTICAL RECEPTACLE, 8 POS., LEFT END RVPX			
		PROCESS SPEC.		THIRD ANGLE PROJECTION							
		9-3895		BOARD LEVEL							
		9-3856-5				SIZE		CAGE CODE		DOCUMENT NO.	
				C		77820		RVPX-J08EXX		A	
						SCALE: 5.0		REF. NONE		SHEET 1 OF 2	

REAR TRANSITION MODULE APPLICATION

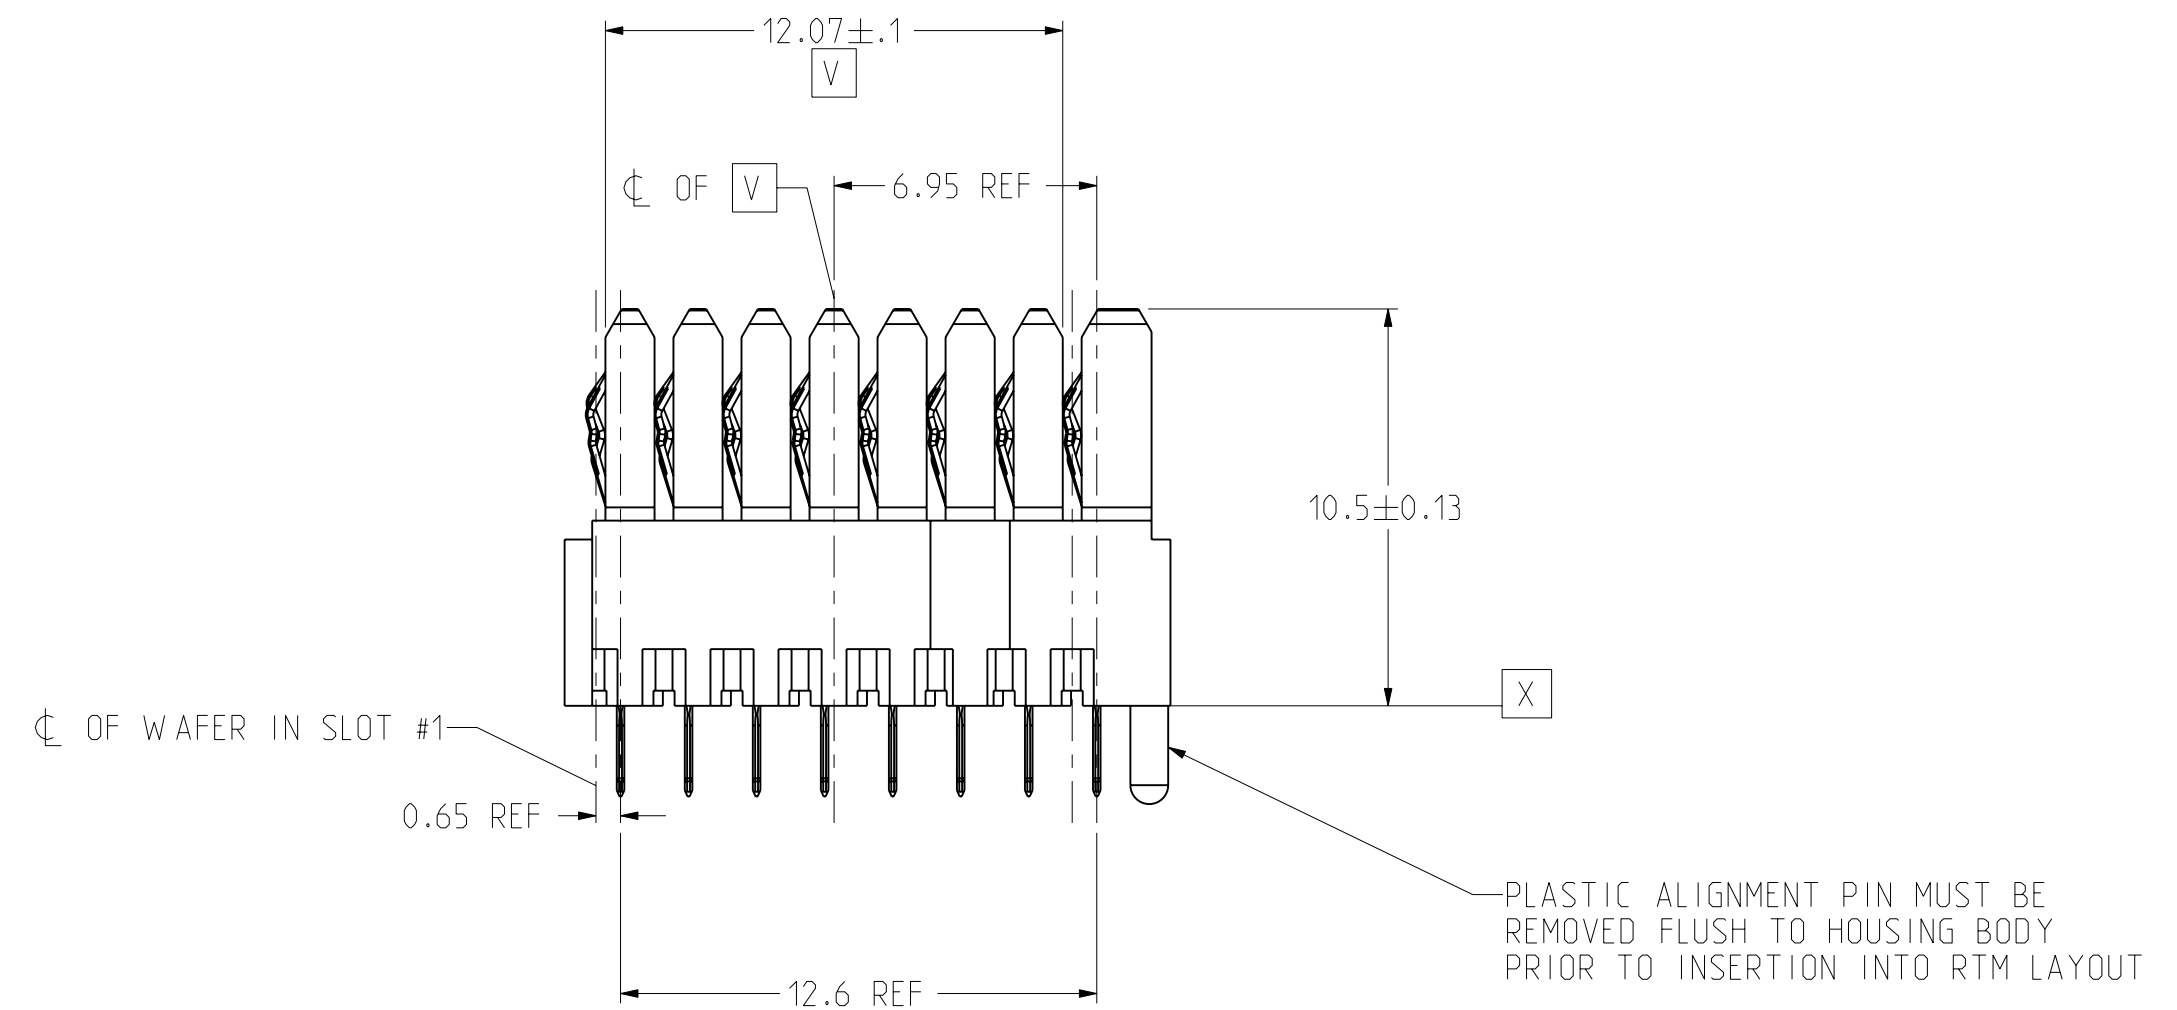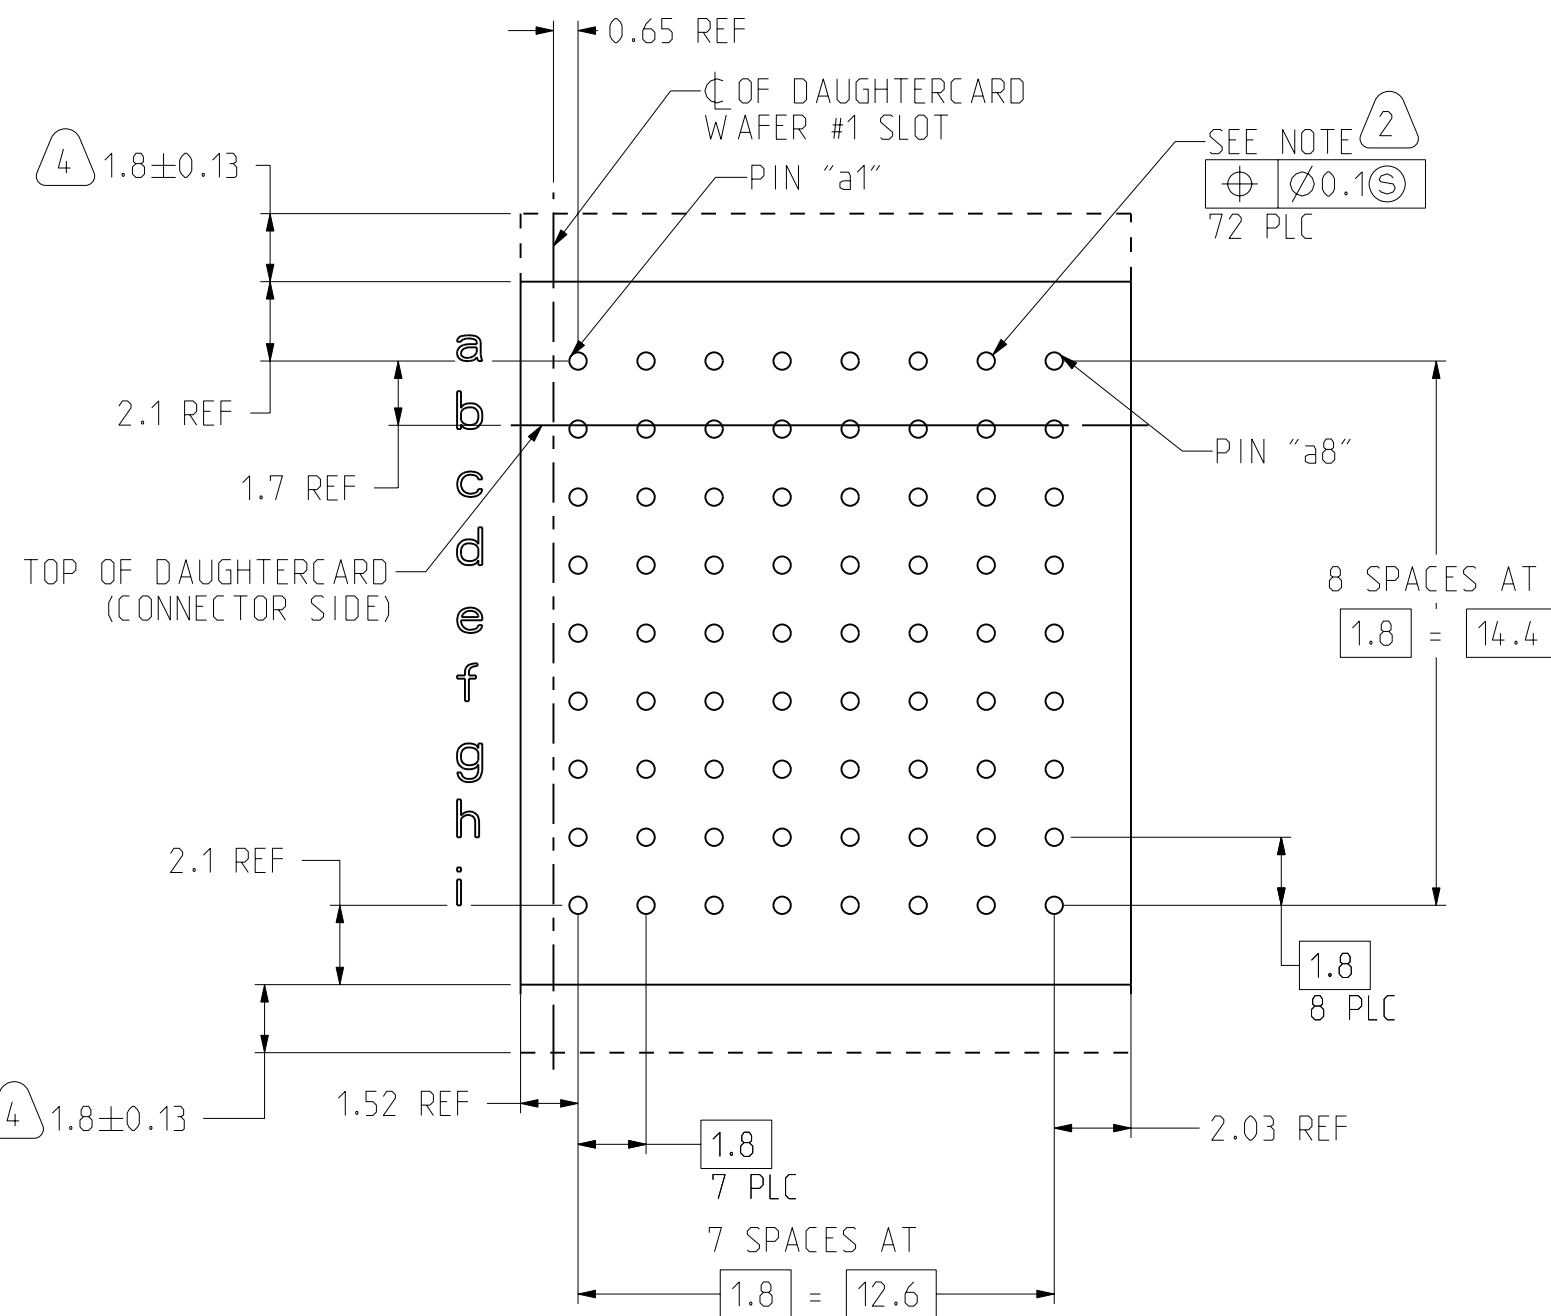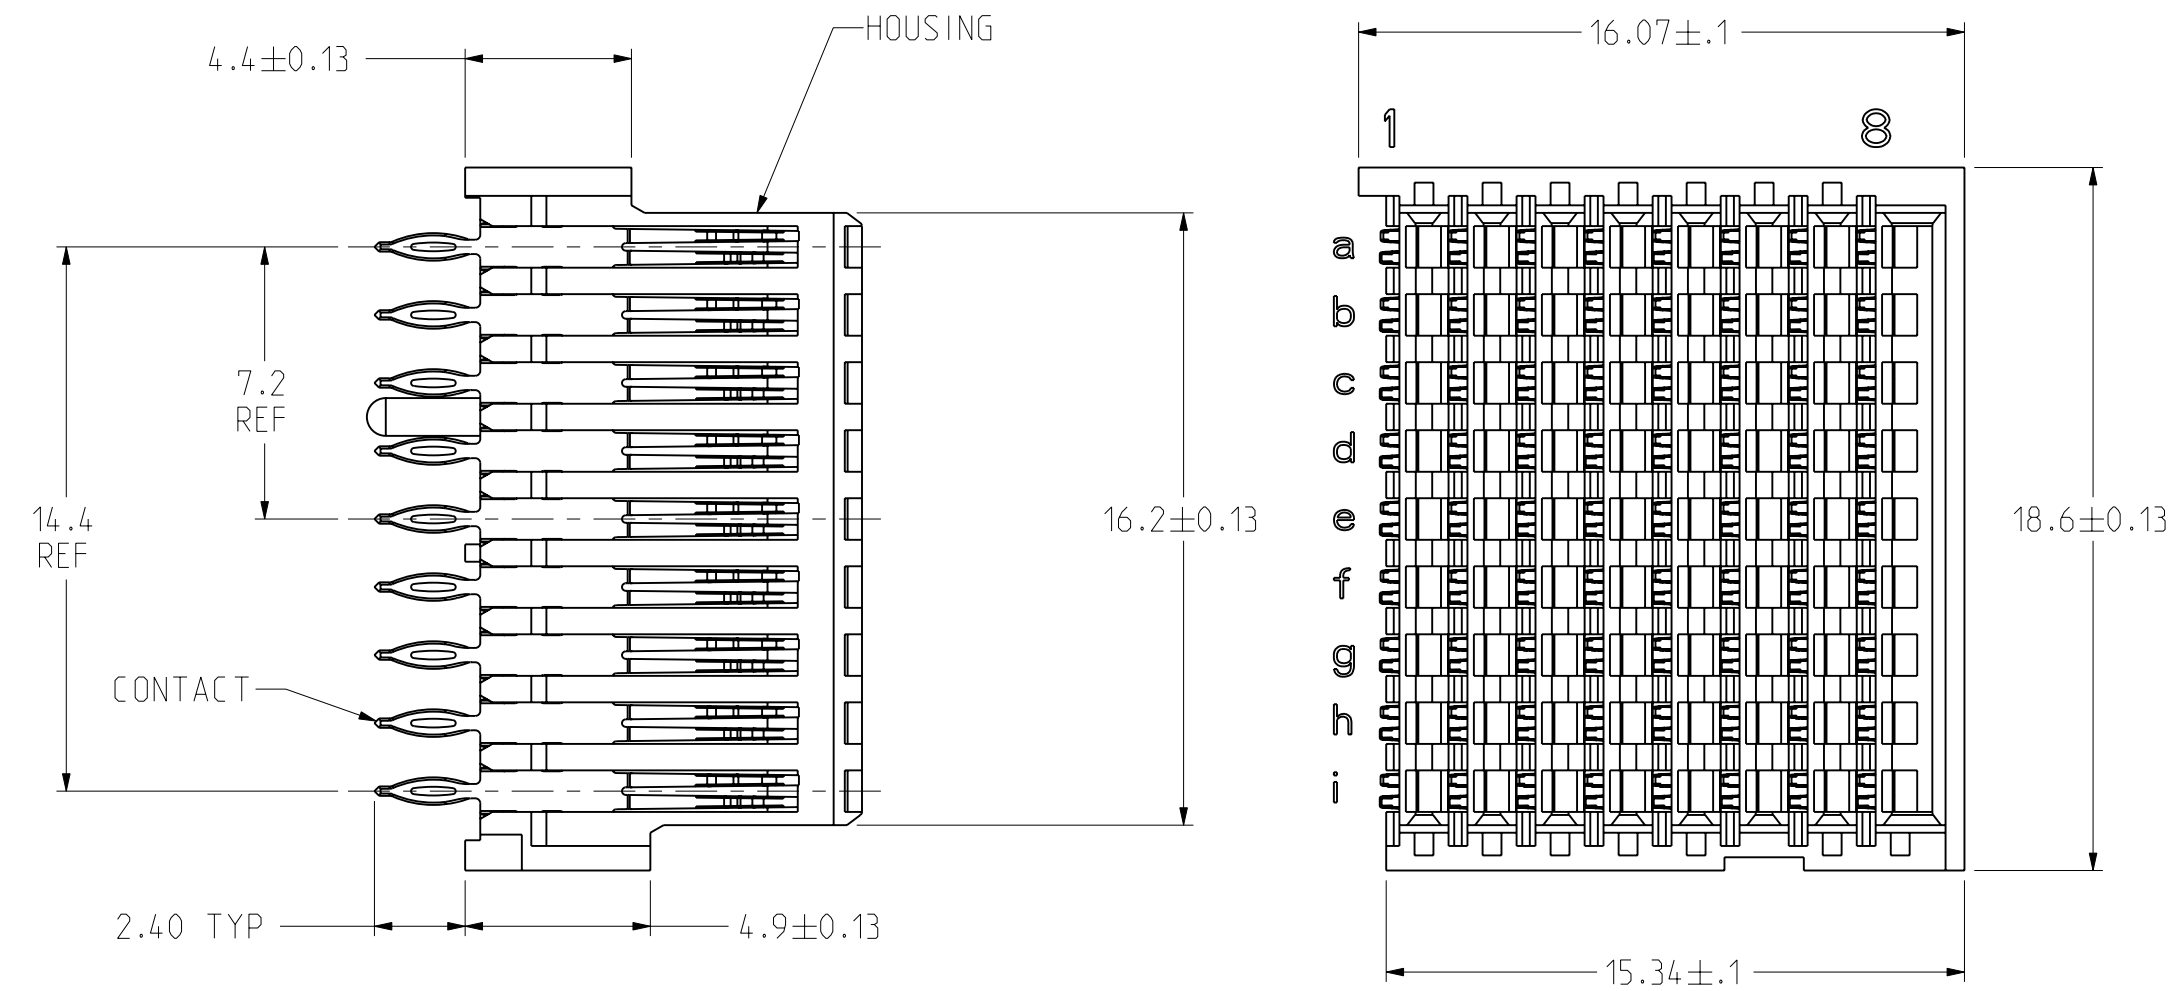

NOTES:

THE USE OF THIS DOCUMENT IS UNLIMITED.
HOWEVER, DOCUMENTS REFERENCED HEREON
MAY CONTAIN LIMITED RIGHTS DATA.

RTM PC BOARD LAYOUT
(CONNECTOR SIDE)
SCALE 5/1

—PLASTIC ALIGNMENT PIN MUST BE
REMOVED FLUSH TO HOUSING BODY
PRIOR TO INSERTION INTO RTM LAYOUT