

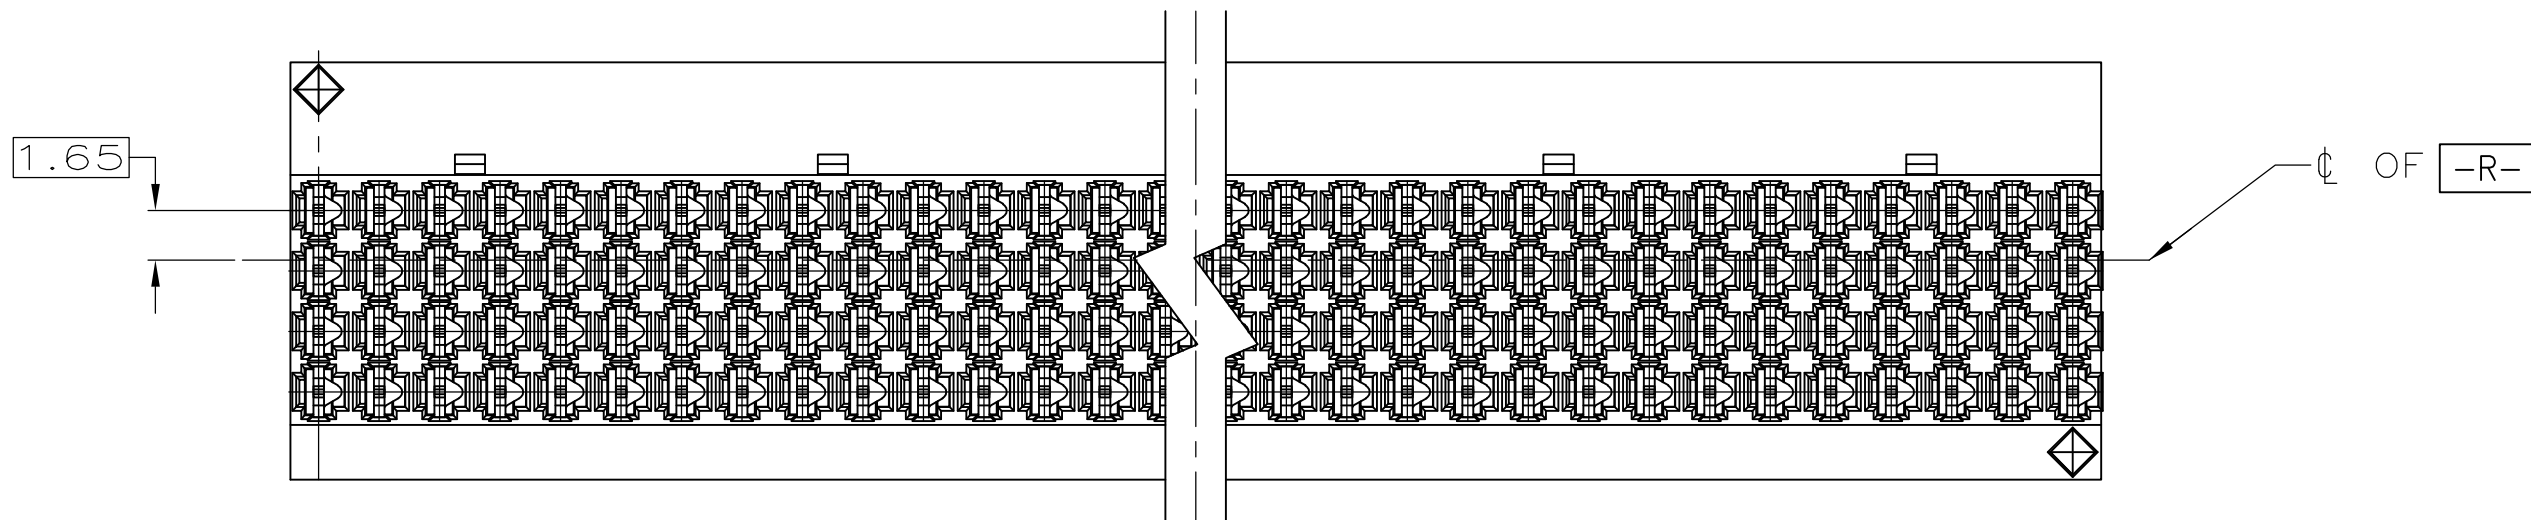
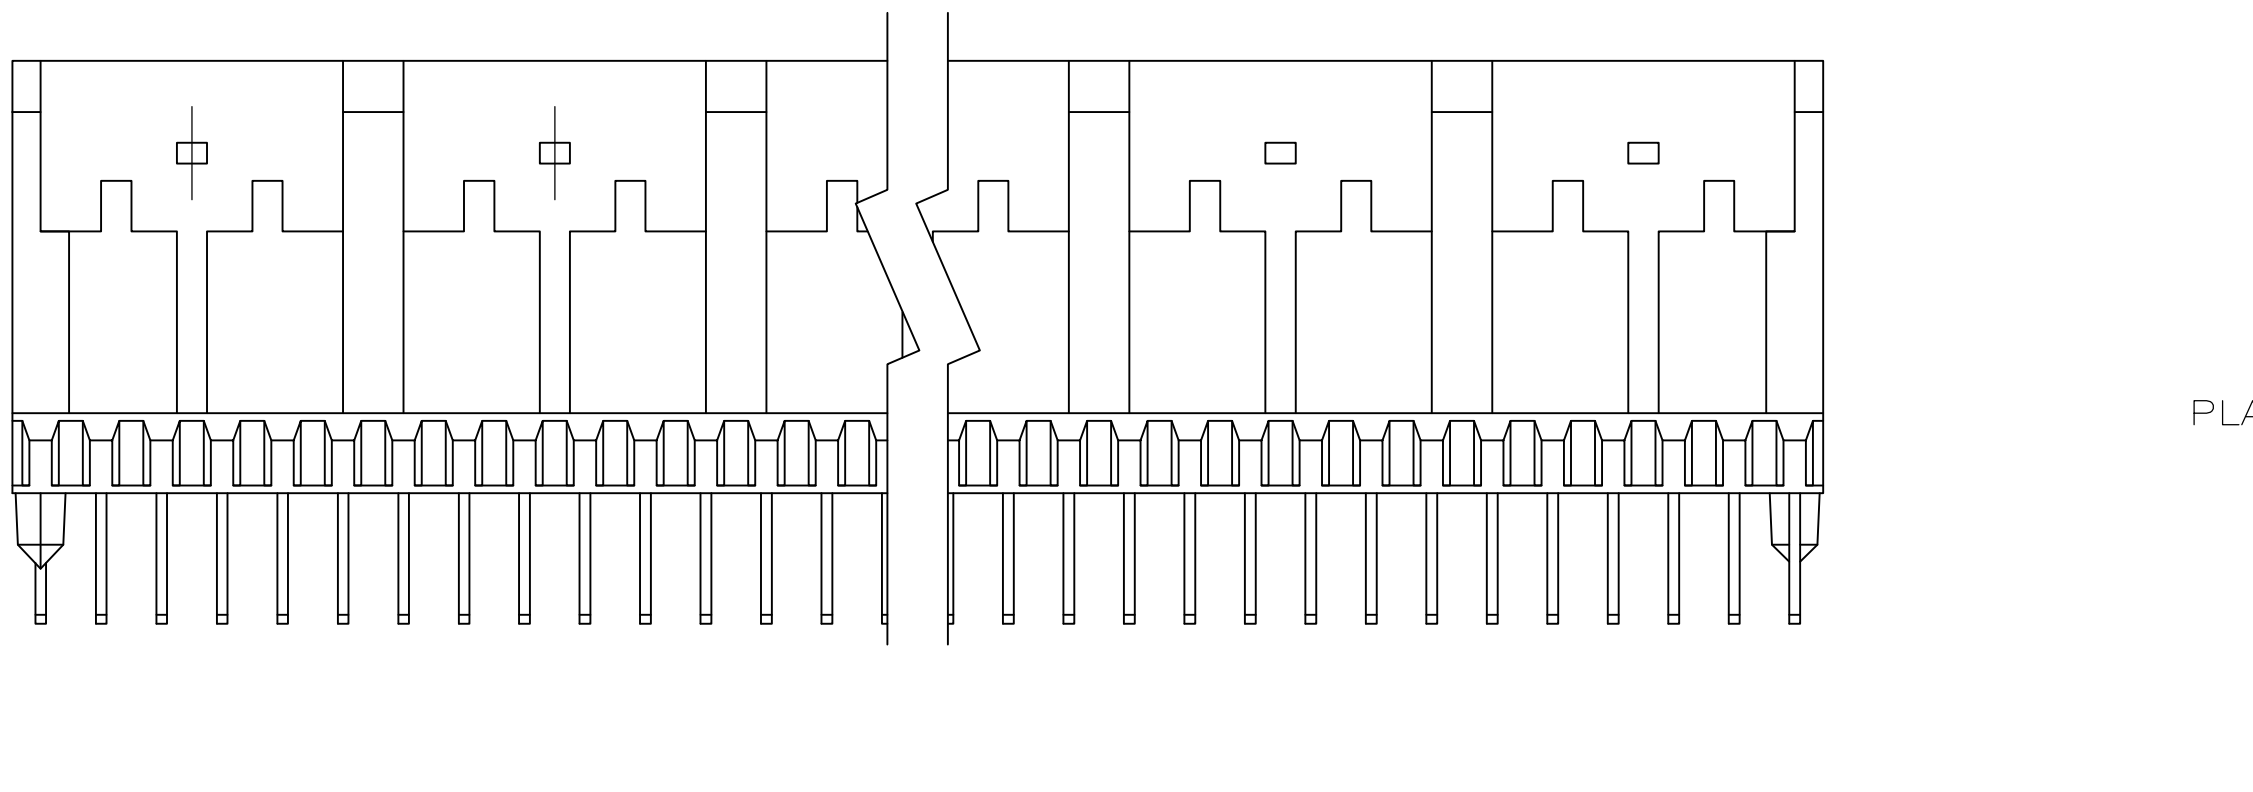
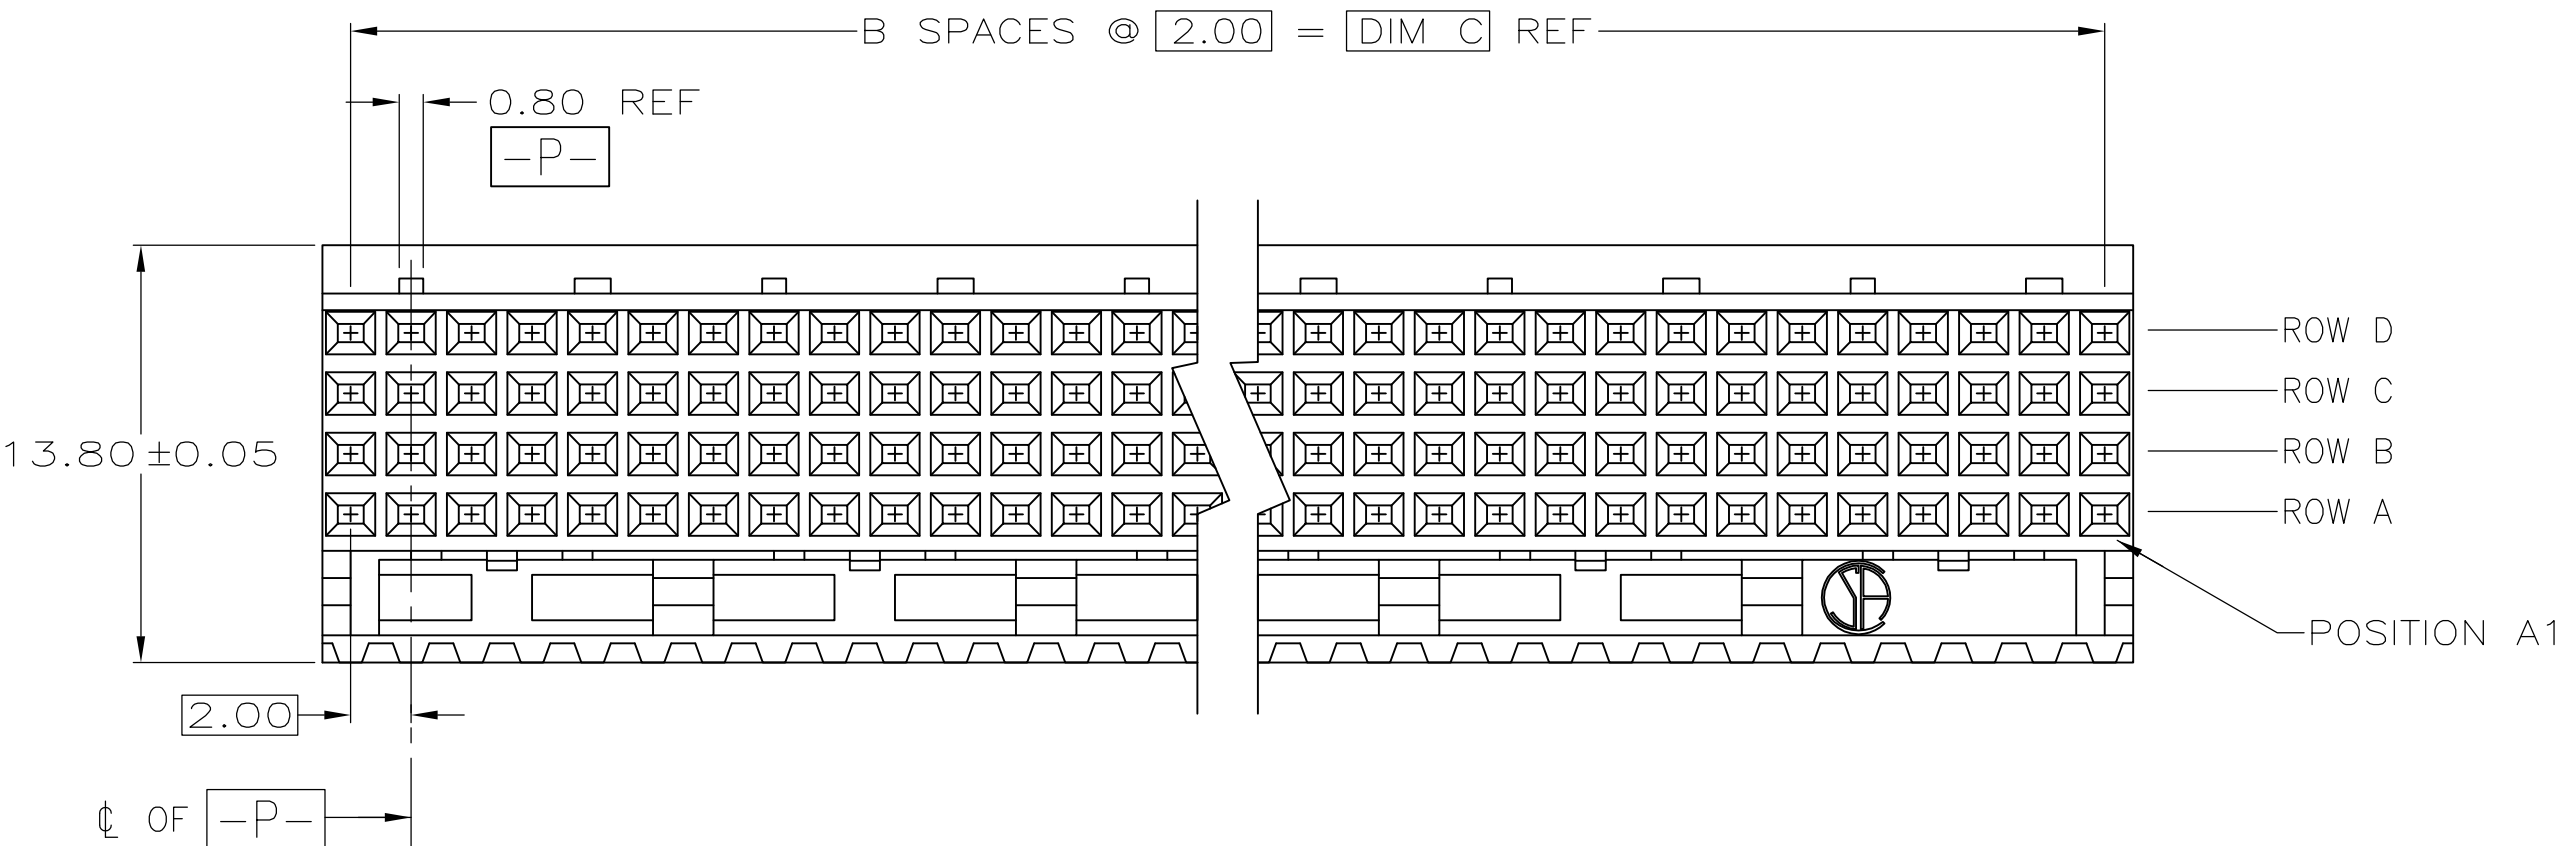
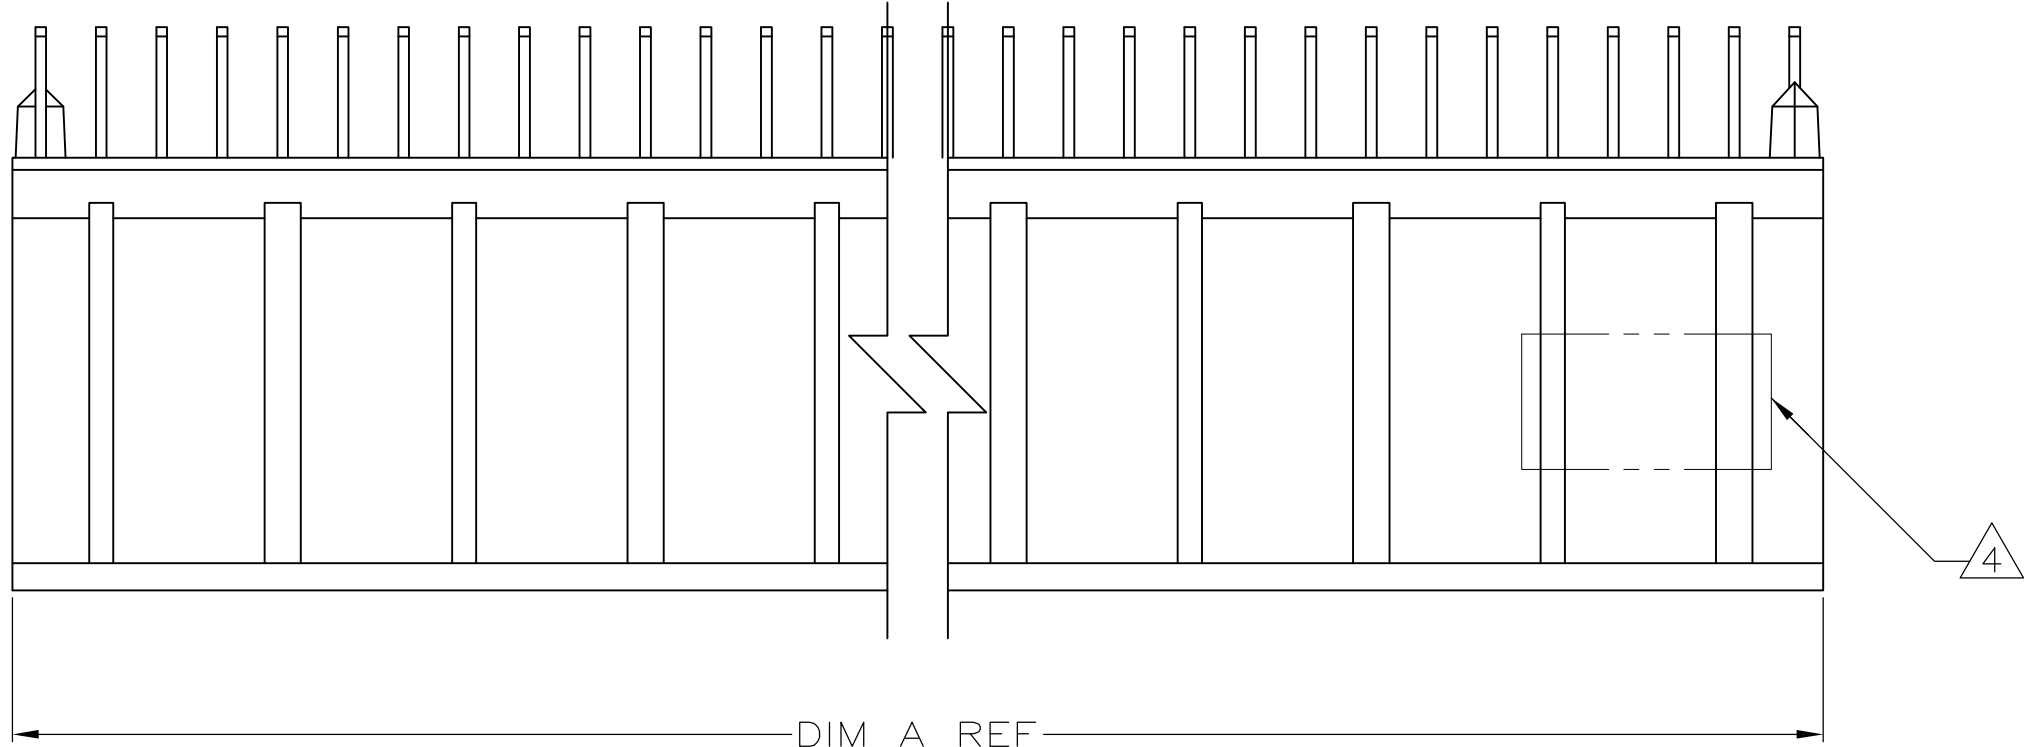



LOC	DIST	REVISIONS				
		REV	LTR	DESCRIPTION	DATE	DWN APVD
AD	00	0		RELEASED PER EC 0512-0317-04	15DEC04	BM RW
		01		REVISED PER ECO-09-024606	31OCT09	KK AEG

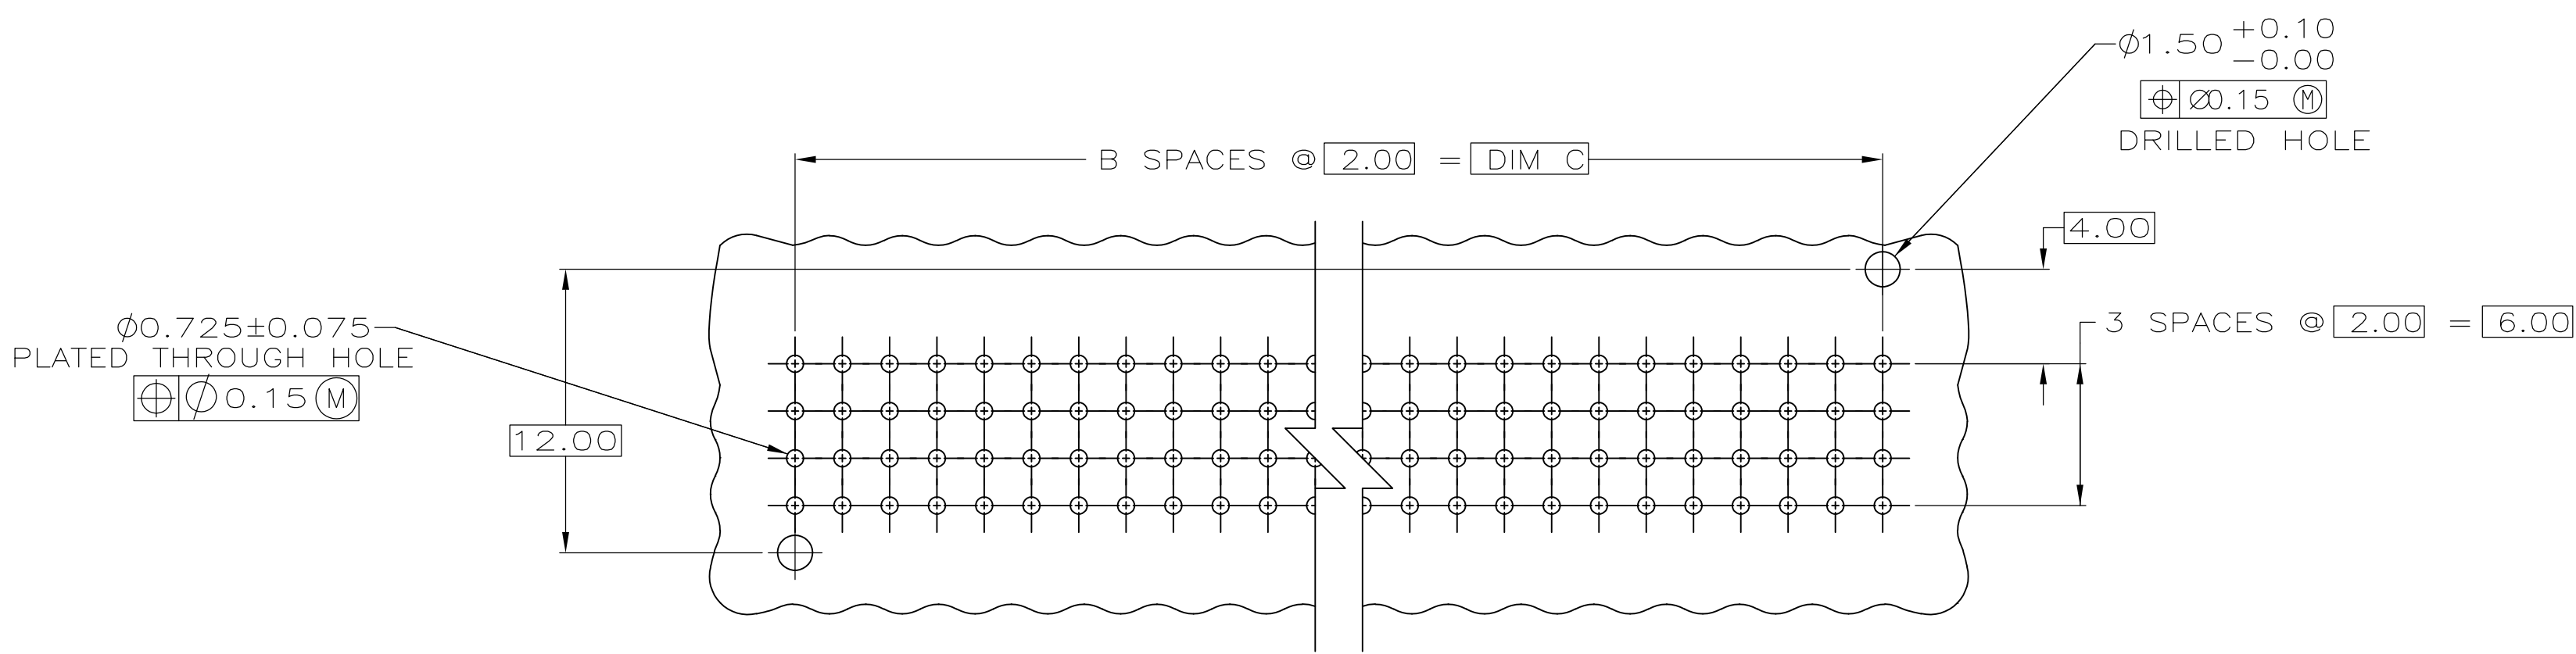

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER. COLOR: NATURAL
- 2 CONTACT MATERIAL: PHOSPHOR-BRONZE
- 3 CONTACT FINISH:(A)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- 4 PART MARKING, LOCATED APPROXIMATELY AS SHOWN.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

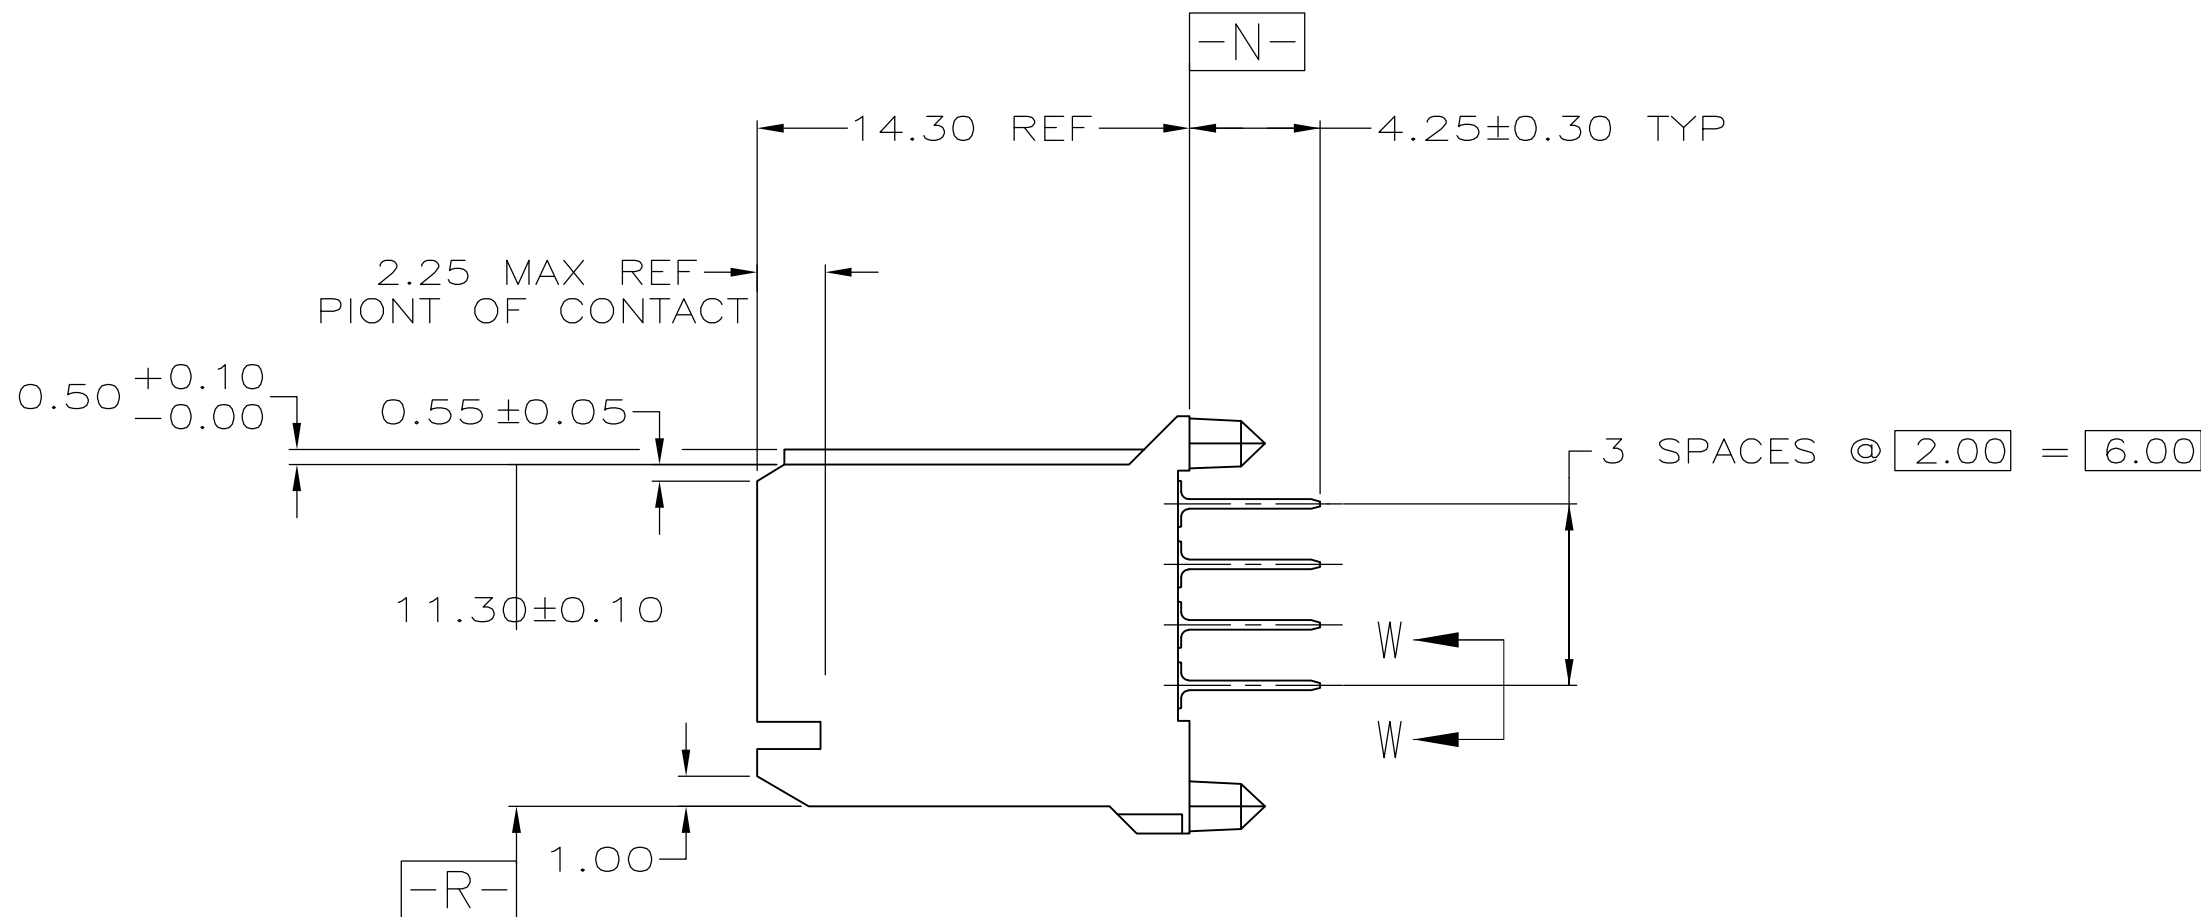

RECOMMENDED CIRCUIT PATTERN
(COMPONENT SIDE)

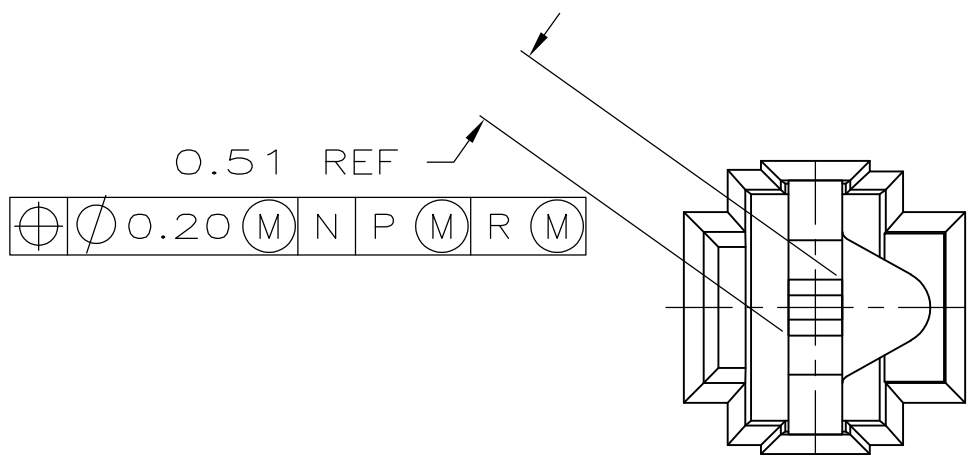

VIEW W-W
SCALE 20:1

OBSOLETE	94.00	47	95.88	192	5223655-8
	82.00	41	83.88	168	5223655-7
	70.00	35	71.88	144	5223655-6
	58.00	29	59.88	120	5223655-5
	46.00	23	47.88	96	5223655-4
OBSOLETE	34.00	17	35.88	72	5223655-3
	22.00	11	23.88	48	5223655-2
	10.00	5	11.88	24	5223655-1
DIM C		B	DIM A	NUMBER OF SIGNAL POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.MCMMASTER CHK R.WERTZ APVD R.WERTZ PRODUCT SPEC	15DEC04 15DEC04 15DEC04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, RECEPTACLE, SIGNAL, VERTICAL, 4 ROW, Z-PACK 2mm FB, WITH SOLDER LEADS	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		APPLICATION SPEC		SIZE A1	
MATERIAL		WEIGHT		CAGE CODE 00779	
1 2 3		CUSTOMER DRAWING		SCALE 4:1 SHEET 1 OF 1 REV 01	