


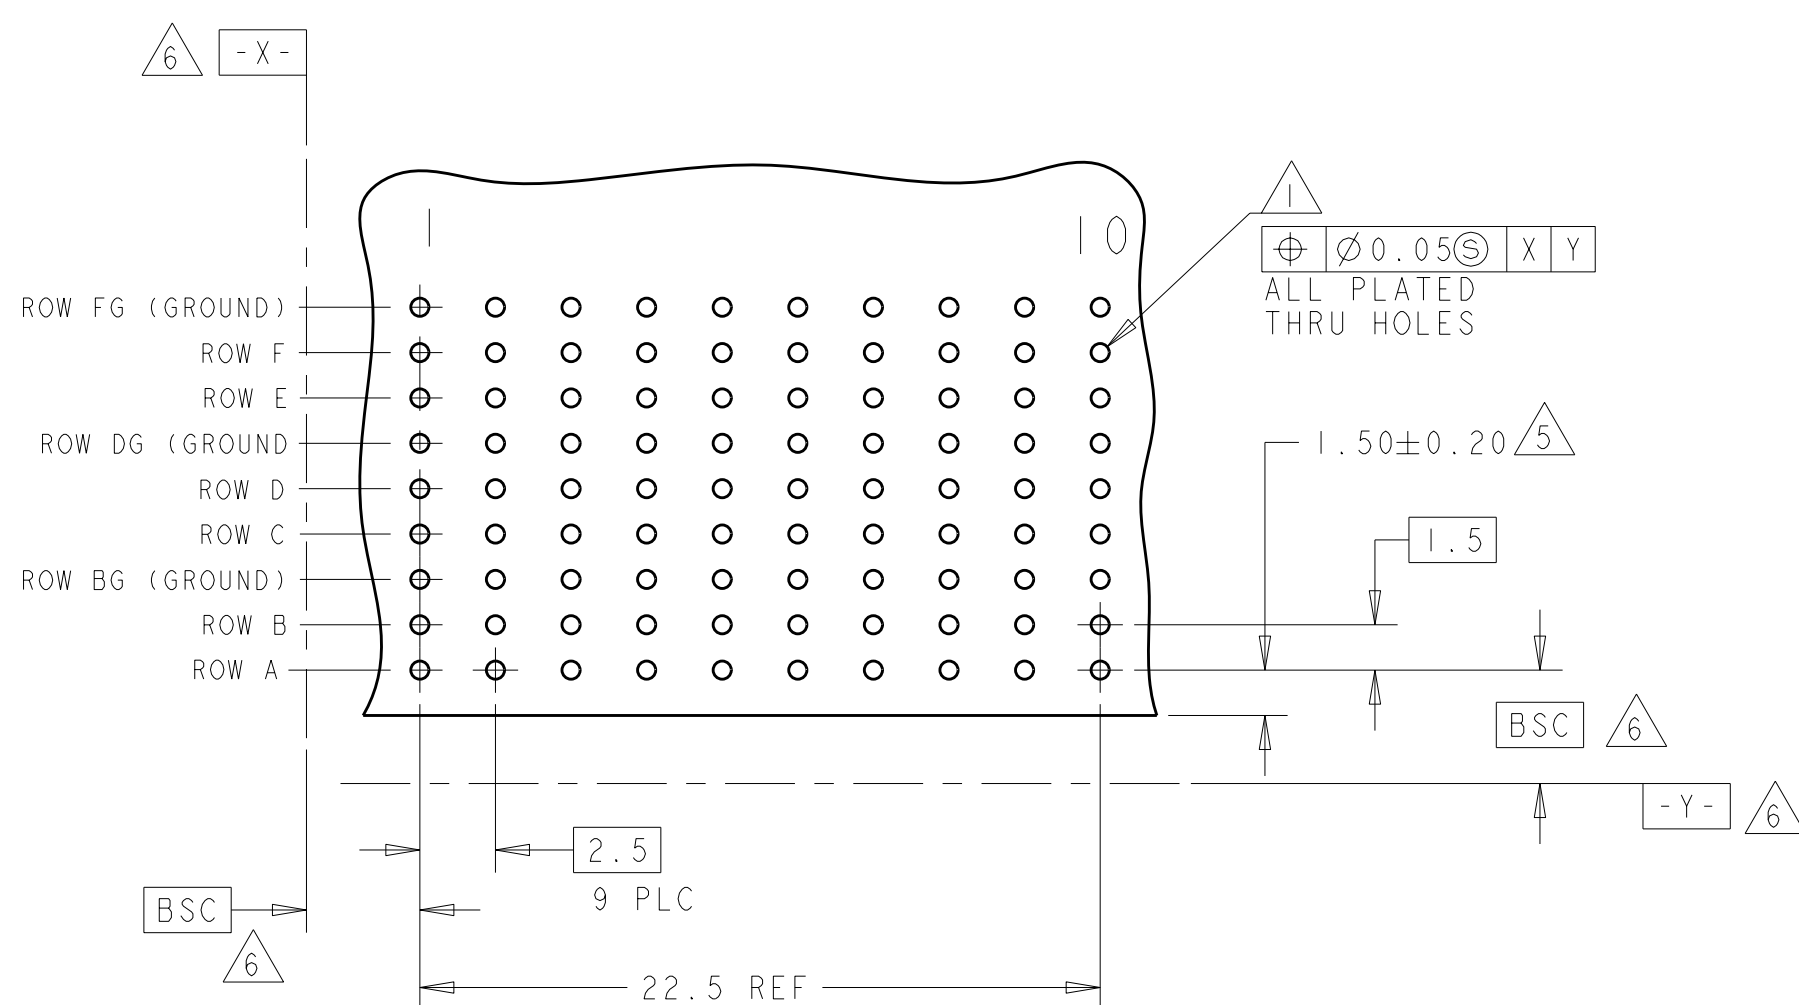

1. REFERENCE APPLICATION SPEC 114-13059 FOR
RECOMMENDED PLATED THRU HOLE DIAMETER AND
PLATING THICKNESSES.

2. MATERIAL:
CONTACT & SHIELD - PHOSPHOR BRONZE
HOUSING & CHICKLET - GLASS FILLED POLYESTER


3. FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED
ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μ m MIN MATTE
TIN OVER BASE PLATING

4. CONNECTOR MARKED WITH PART NUMBER AND
DATE CODE IN APPROXIMATE AREA SHOWN

5. DIMENSION APPLIES TO CENTERLINE OF THRU HOLE

6. DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER

7. CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

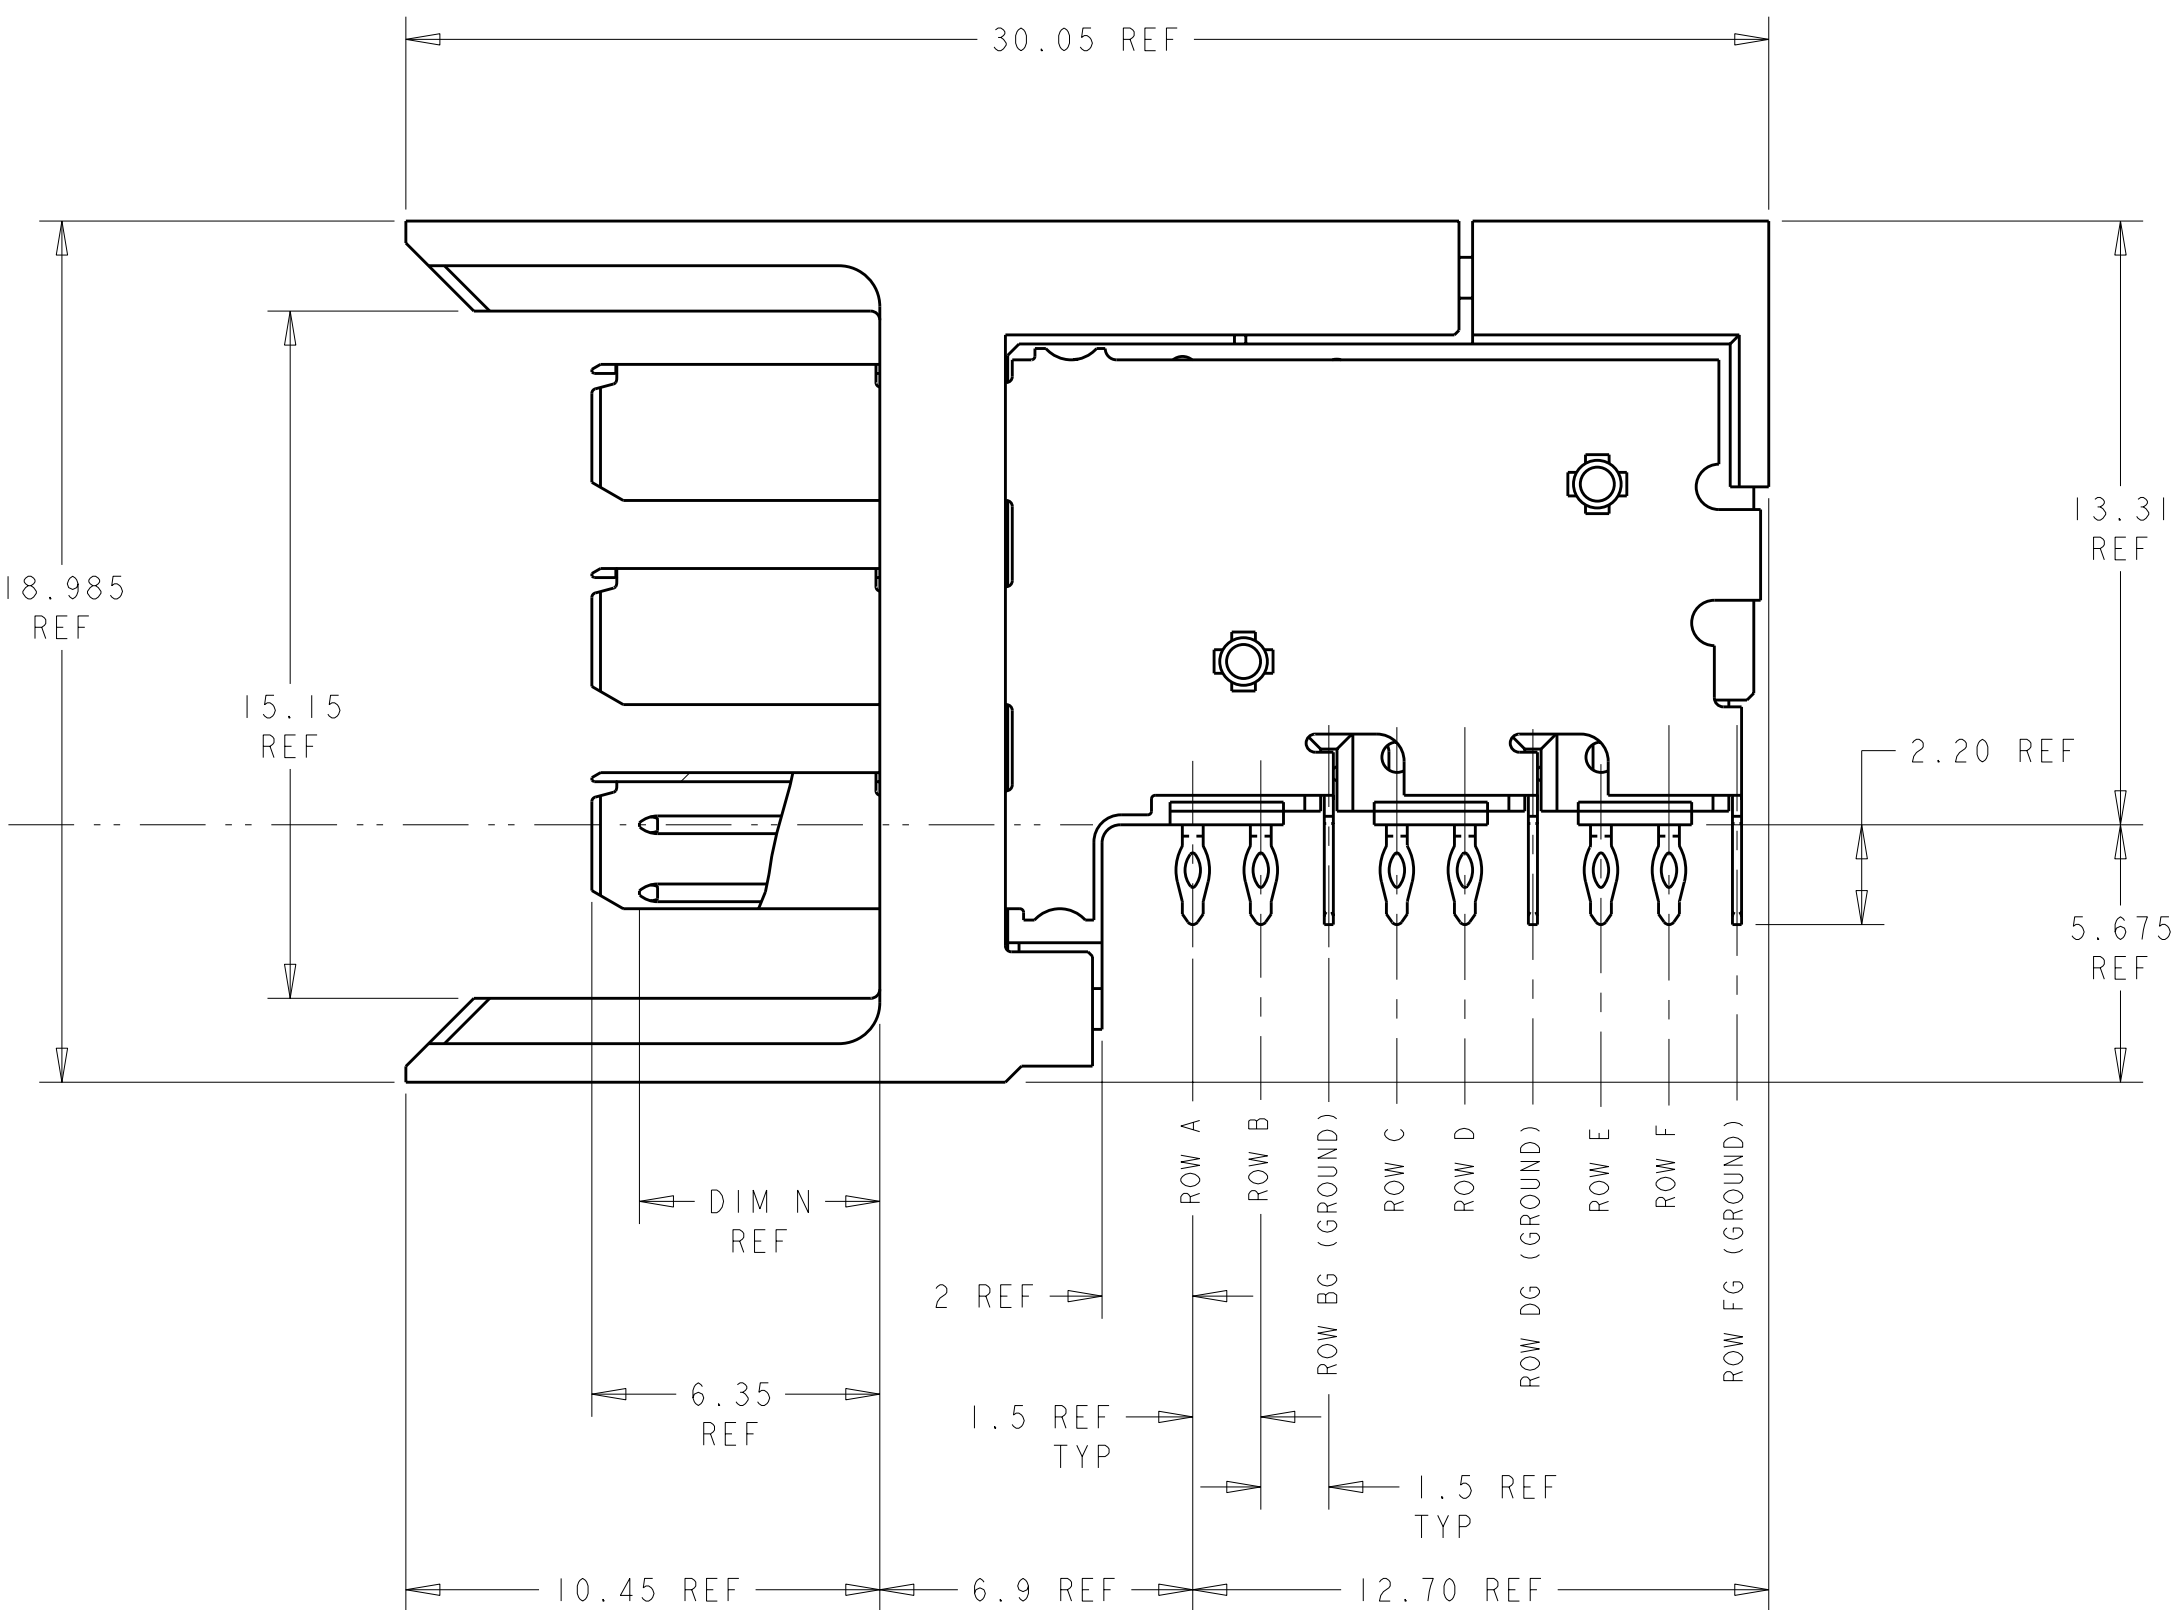

6469183-1
PART NUMBER

4805 (3/11)