


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	INITIAL RELEASE	27NOV2006	GIP	DO

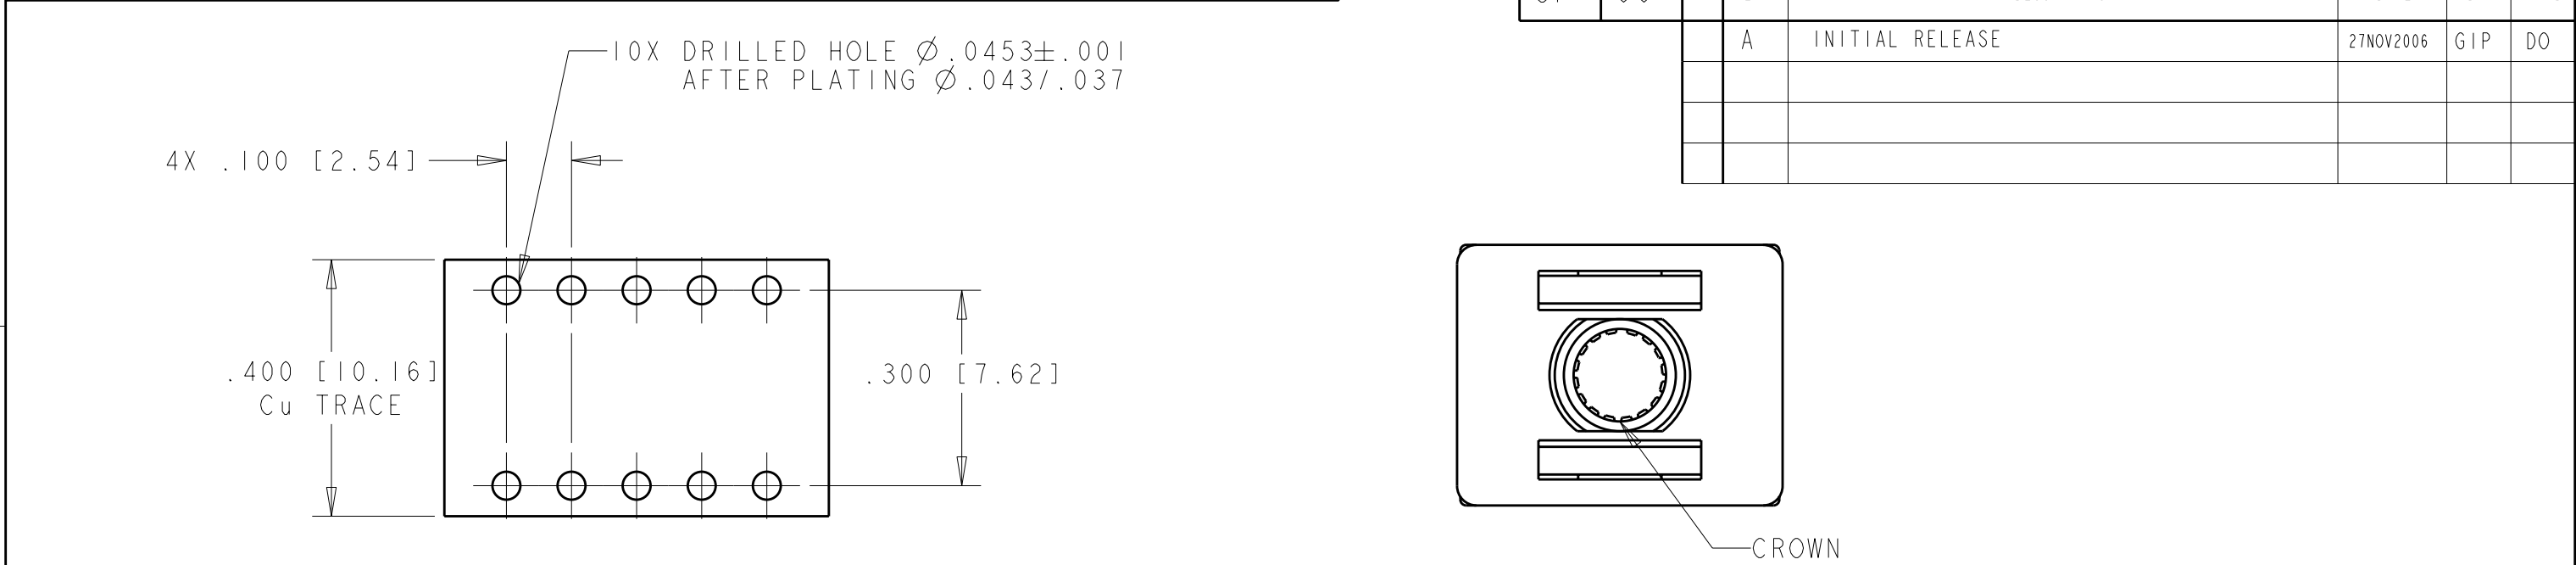

- RECOMMENDED FOOTPRINT
- PART NUMBER CHANGES AND/OR DESIGN CHANGES AFFECTING ITEM INTERCHANGEABILITY REQUIRE PRIOR TYCO APPROVAL AND AUTHORIZATION BY REVISION TO THIS DRAWING.
 - ITEM PROVIDED TO THIS SPECIFICATION SHALL BE IDENTIFIED ON CONTAINER WITH THE FOLLOWING INFORMATION, PART NUMBER AND DATE CODE OF MANUFACTURE.
 - MATERIAL:
INSULATOR - POLYESTER, GLASS FILLED, UL 94 V-0
RATED COLOR: BLACK
MODULE: ZINC ALLOY
CROWN: BeCu
 - FINISH:
MODULE-SILVER .0002 MIN THK OVER NICKEL .00005 MIN THK OVER COPPER .00001 MIN THK.
CROWN- GOLD IN CONTACT AREA .00003 MIN THK. OVER NICKEL .00005 MIN THK.

5 A FIVE POUND (5lb) FORCE REQUIRED TO CORRECTLY SEAT THE CONNECTOR WITH THE PLATED THRU HOLES LESS THAN Ø.040 INCH.

6. REFERENCE TYCO ASSEMBLY PART NUMBER 1643219-1.

NOTES: UNLESS OTHERWISE SPECIFIED

ELCON		ICCON				1 PLC ±-		-		2" X 5", WITH THRU HOLE		-							
						2 PLC ±.01 [.3]		APPLICATION SPEC											
						3 PLC ±.006 [.15]		-		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
						4 PLC ±-		-		A3		00779		C-1643219		-			
				MATERIAL SEE LIST		FINISH -		WEIGHT -		CUSTOMER DRAWING		SCALE		SHEET		OF		REV A	