



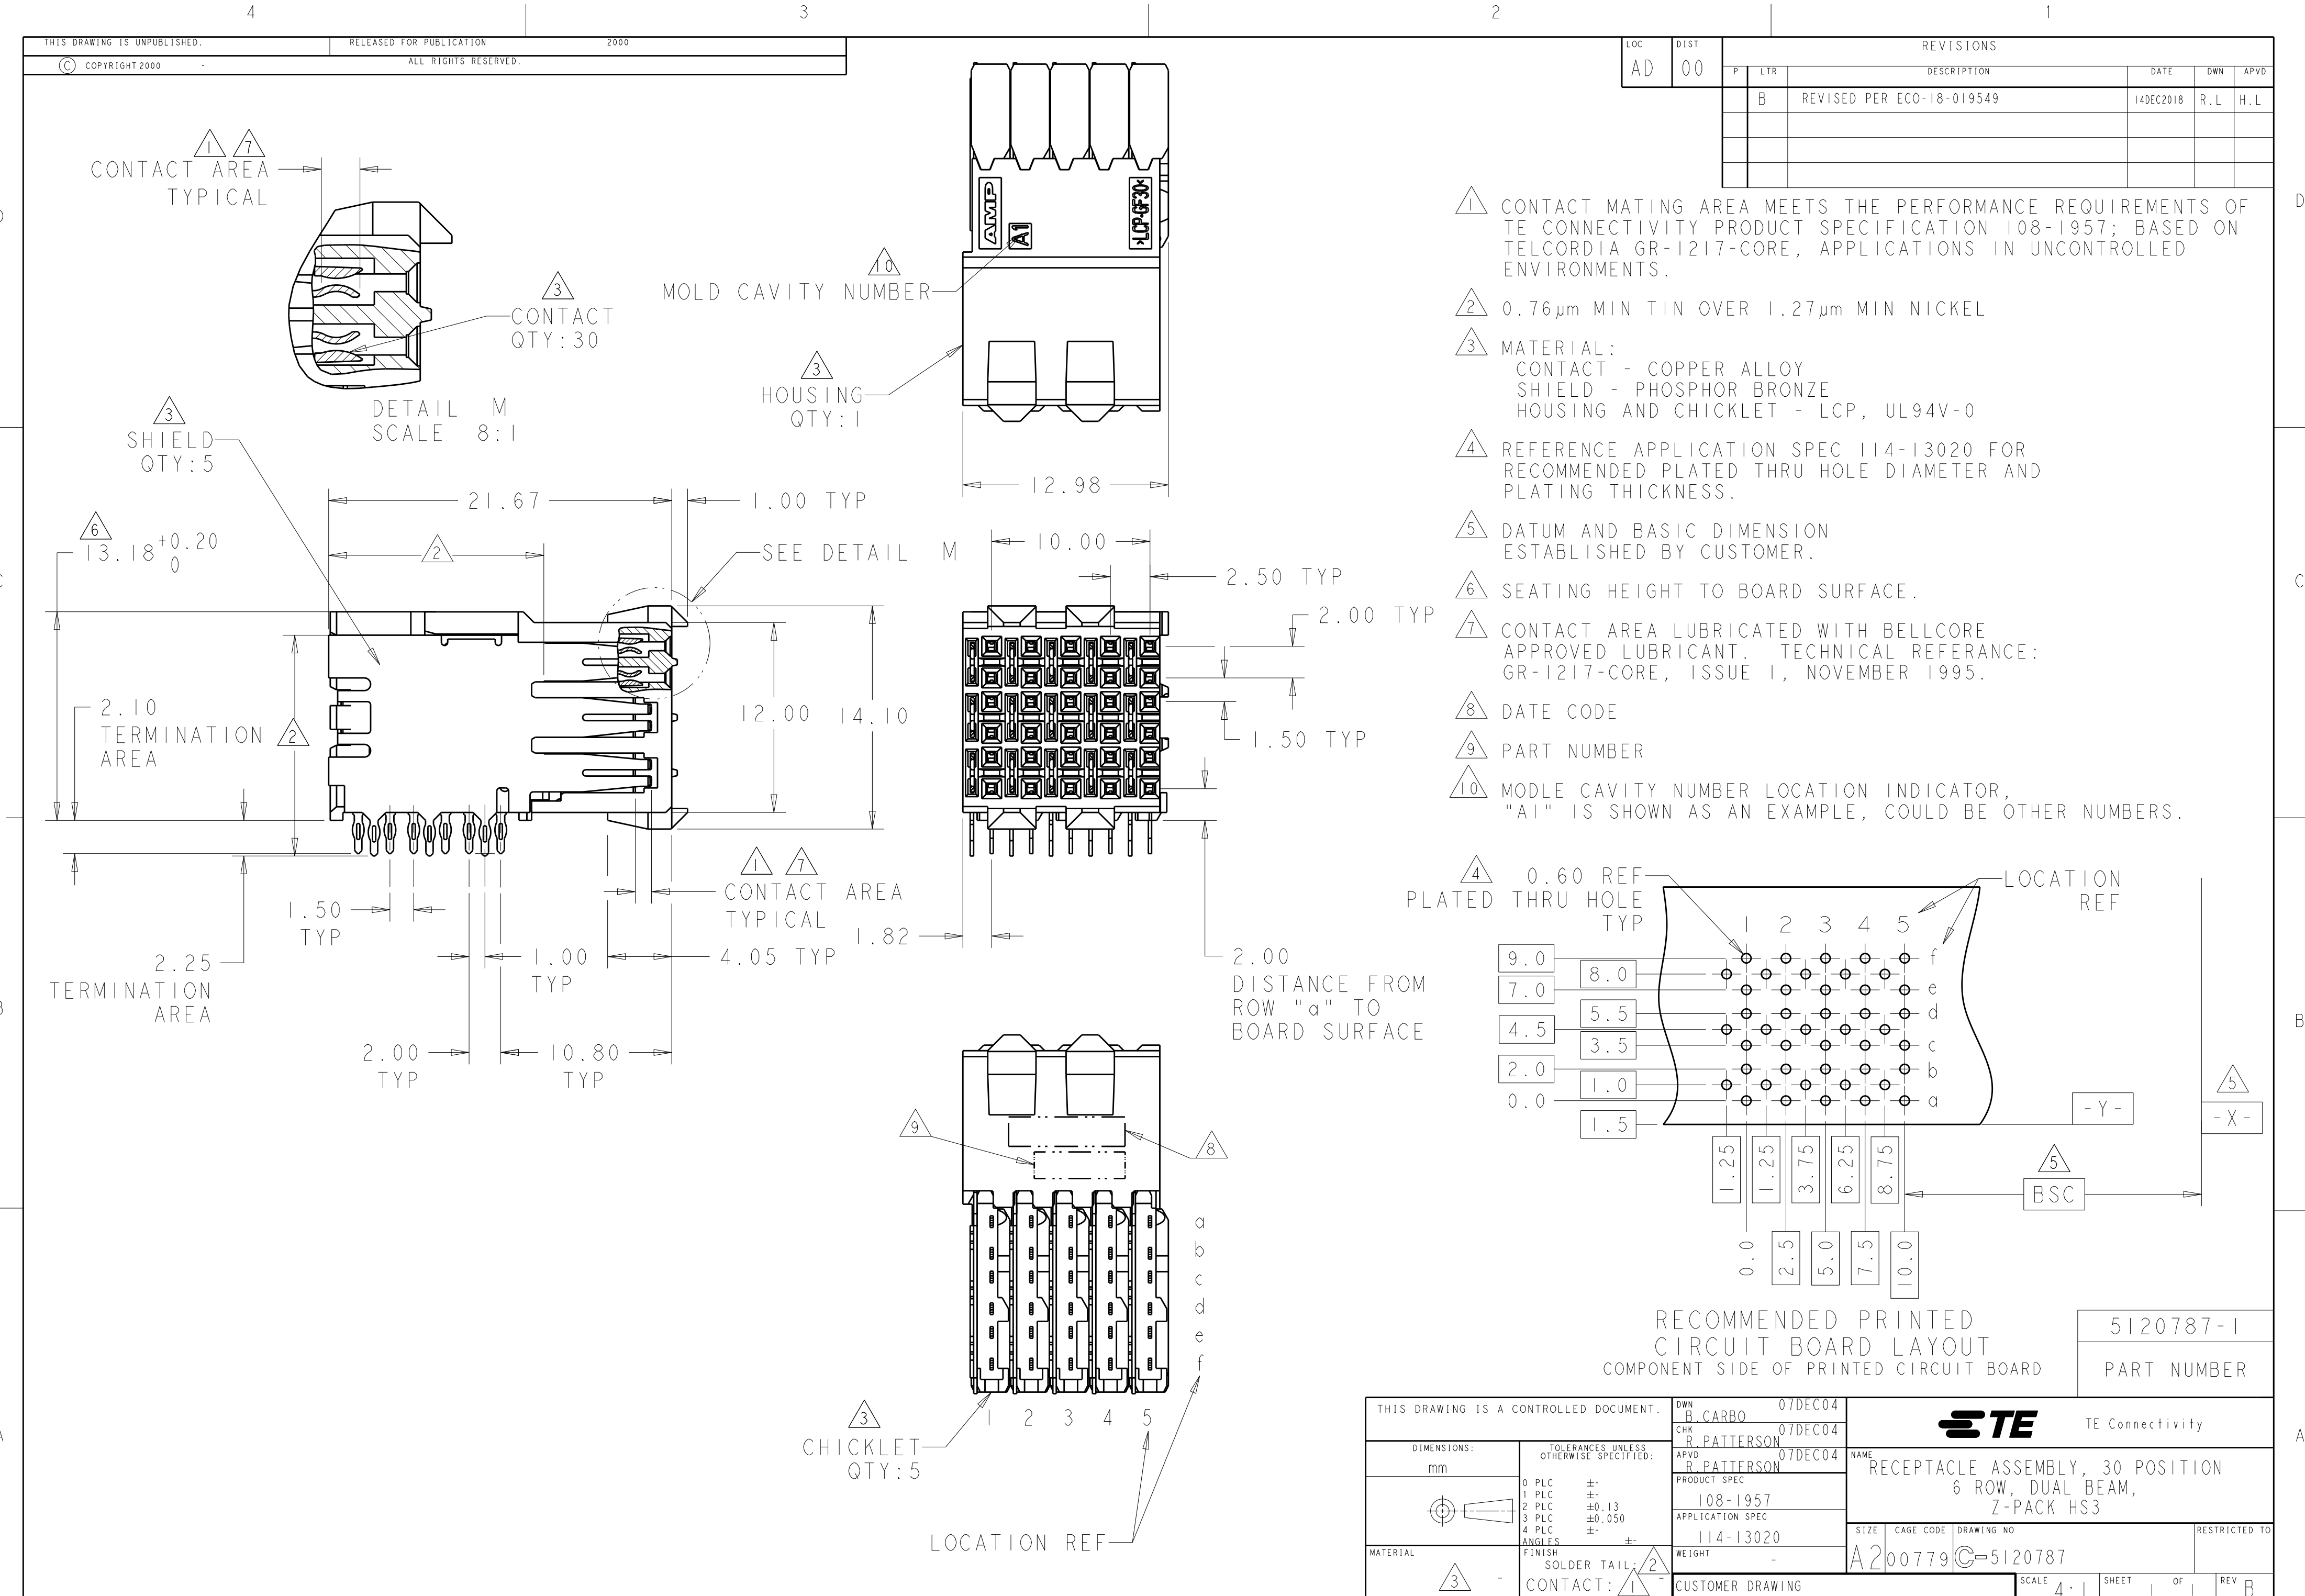

LOC		DIST		REVISIONS			
AD		00		P	LTR	DESCRIPTION	DATE
					B	REVISED PER ECO-18-019549	14DEC2018

- 1 CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 2 0.76µm MIN TIN OVER 1.27µm MIN NICKEL
- 3 MATERIAL:
CONTACT - COPPER ALLOY
SHIELD - PHOSPHOR BRONZE
HOUSING AND CHICKLET - LCP, UL94V-0
- 4 REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 5 DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- 6 SEATING HEIGHT TO BOARD SURFACE.
- 7 CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 8 DATE CODE
- 9 PART NUMBER
- 10 MODE CAVITY NUMBER LOCATION INDICATOR, "A1" IS SHOWN AS AN EXAMPLE, COULD BE OTHER NUMBERS.

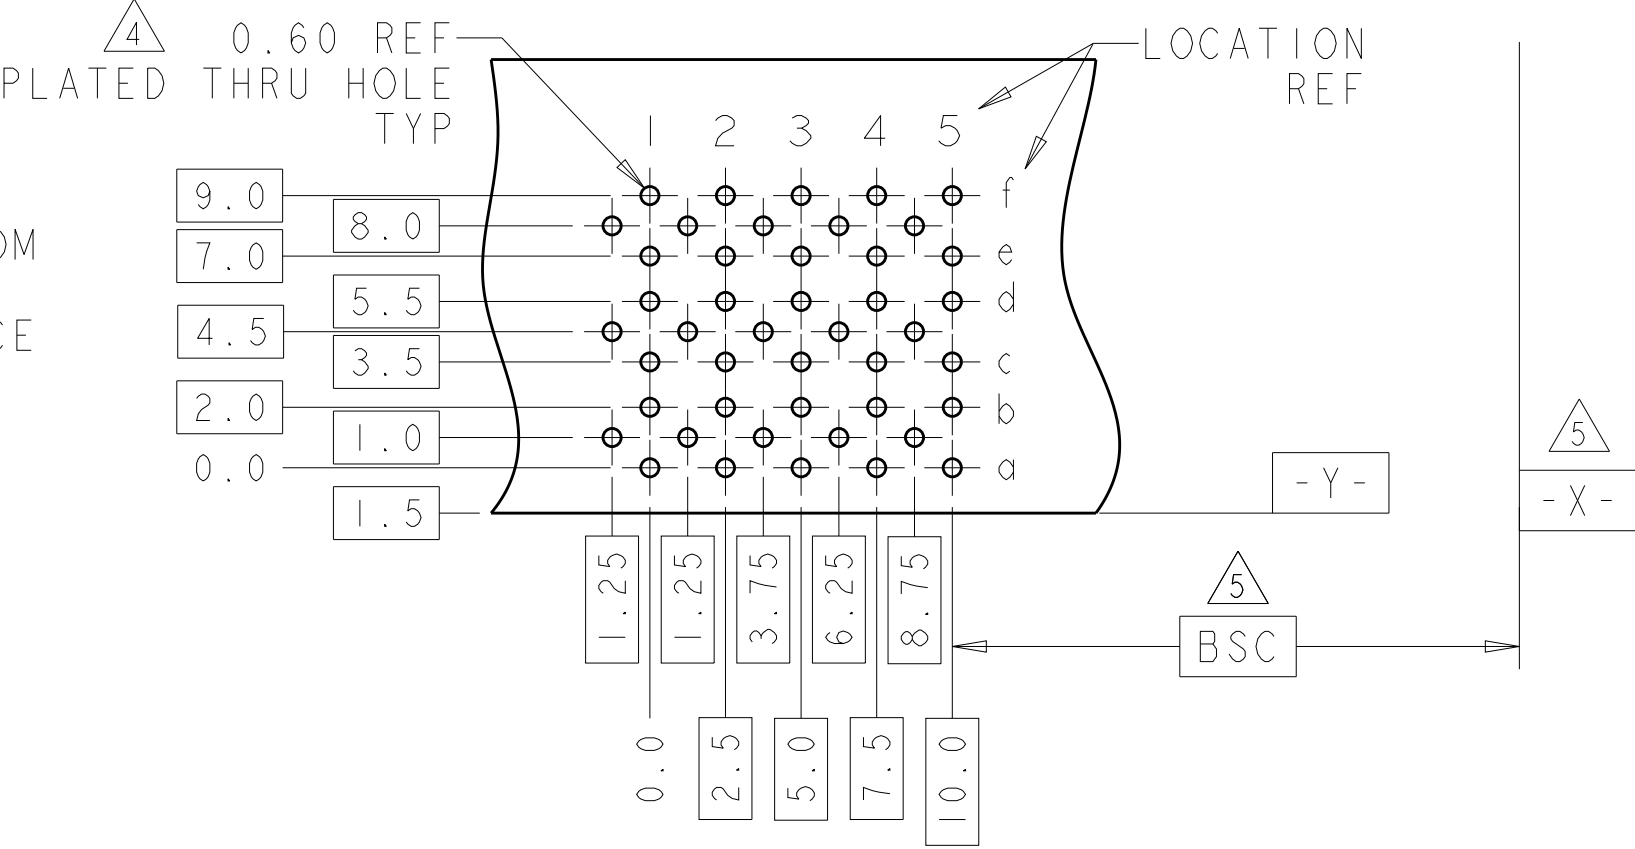

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5120787-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	07DEC04	TE Connectivity			
DIMENSIONS: mm		CHK R. PATTERSON	07DEC04				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON	07DEC04	NAME RECEPTACLE ASSEMBLY, 30 POSITION 6 ROW, DUAL BEAM, Z-PACK HS3			
0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ±0.050 4 PLC ± ANGLES ±		PRODUCT SPEC 108-1957		SIZE A200779		DRAWING NO C-5120787	
MATERIAL FINISH SOLDER TAIL: 2 CONTACT: 1		APPLICATION SPEC 114-13020		CAGE CODE A200779		RESTRICTED TO REV B	
		WEIGHT -		SCALE 4:1		SHEET 1 OF 1	
		CUSTOMER DRAWING					