

REVISIONS					
#	LTR	DESCRIPTION	DATE	DWN	APVD
K1		ECN-22-165236	19JUL2022	NV	HL

- 1


HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
COLOR: NATURAL.
- 2

CONTACT MATERIAL: PHOSPHOR BRONZE
- 3

CONTACT FINISH:
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL.
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS
0.00381 MIN TIN-LEAD OVER UNDERPLATE.
LUBRICATION (ENTIRE CONTACT):
SURFACE CONDITIONER PER AMP SPEC 112-1002 AFTER PLATING.
- 4

PART MARKING LOCATED APPROXIMATELY AS SHOWN.
- 5

OBSOLETE PARTS: OBSOLETE CIS STREAMLINING
PER D.RENAUD/D.SINISI


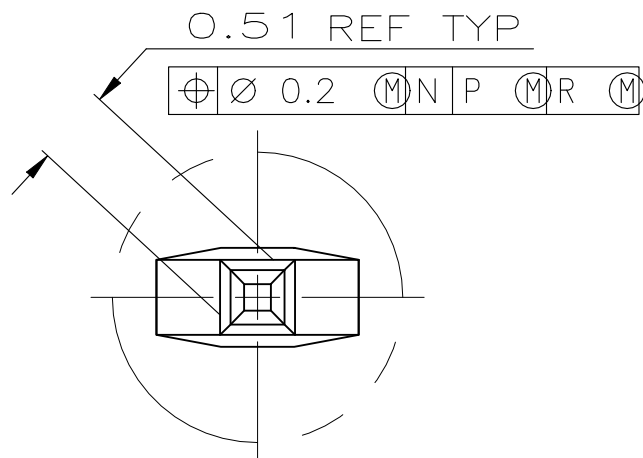


DETAIL Z
SCALE 20:1

5	OBSOLETE	130	65	131.88	3	330	4-223000-1
	OBSOLETE	118	59	119.88	3	300	1-223000-0
5	OBSOLETE	106	53	107.88	3	270	223000-9
5	SUPERSEDED BY 5223000-8	94	47	95.88	3	240	223000-8
5	OBSOLETE	82	41	83.88	3	210	223000-7
	SUPERSEDED	70	35	71.88	3	180	223000-6
		58	29	59.88	3	150	223000-5
	OBSOLETE	46	23	47.88	3	120	223000-4
1	OBSOLETE	34	17	35.88	3	90	223000-3
	OBSOLETE	22	11	23.88	3	60	223000-2
1	OBSOLETE	10	5	11.88	3	30	223000-1

C	B	A	FINISH	NO. OF SIGNAL POSN	PART NUMBER
---	---	---	--------	--------------------	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. BUCHHEISTER 10/JAN/96	TE Connectivity	
		CHK D. BAECHTLE 11/JAN/96		
		APVD D. SINISI 11/JAN/96	NAME ASSEMBLY, PIN, SIGNAL, VERTICAL, Z-PACK 2mm FB, 5 ROW, SOLDER LEAD - 	

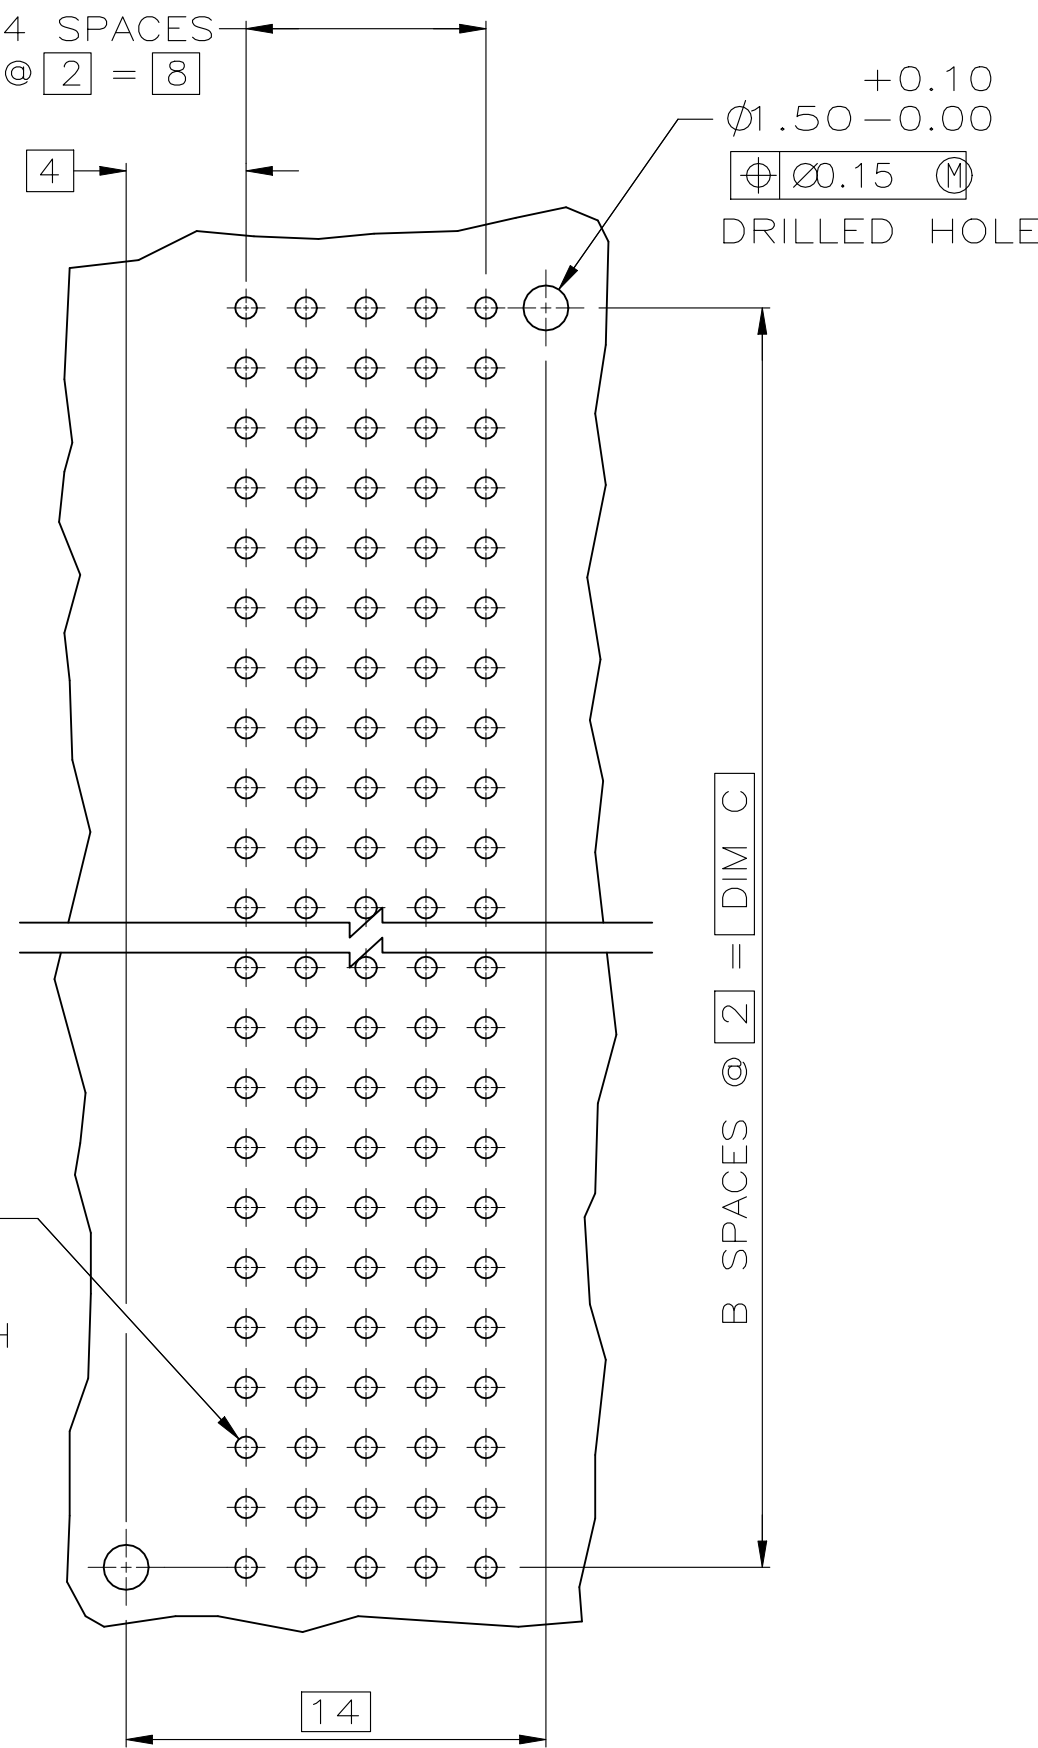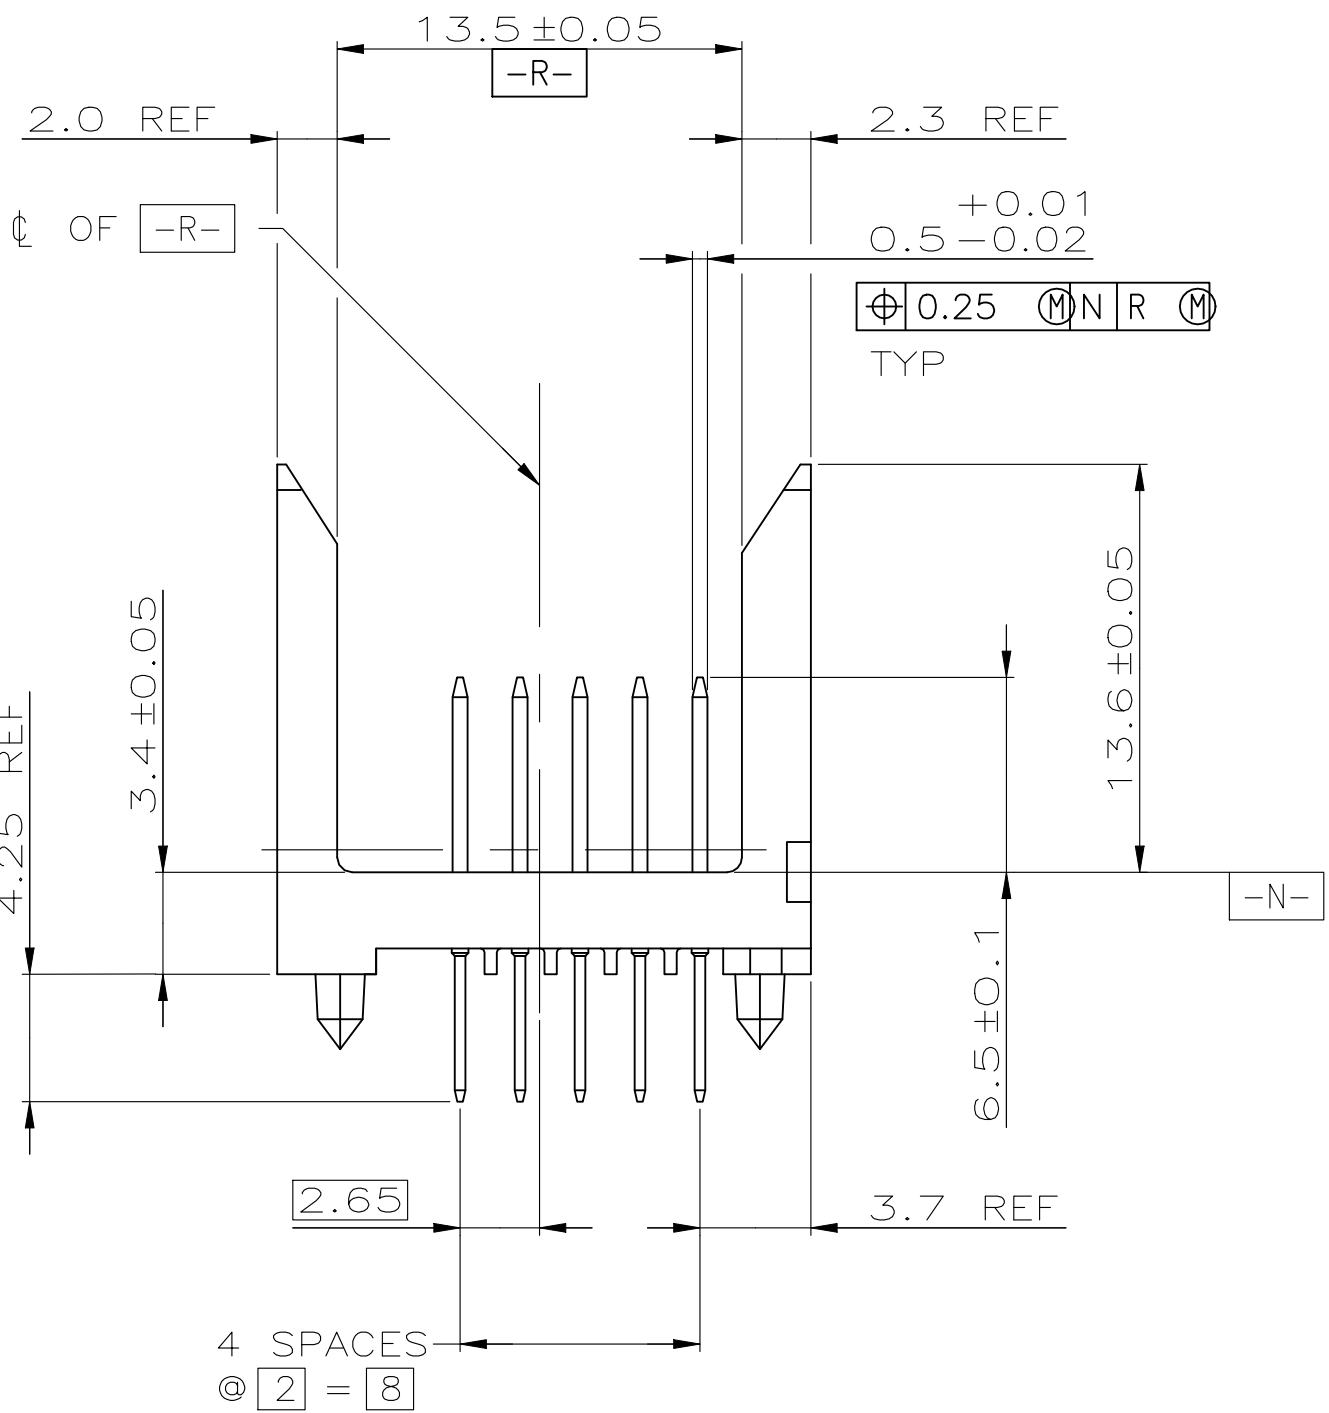

RECOMMENDED CIRCUIT PATTERN
(COMPONENT SIDE)

