


LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			B	REVISED EPR ECO-18-020072	25DEC2018	R.L	H.L





CONTACT AREA
TYPICAL

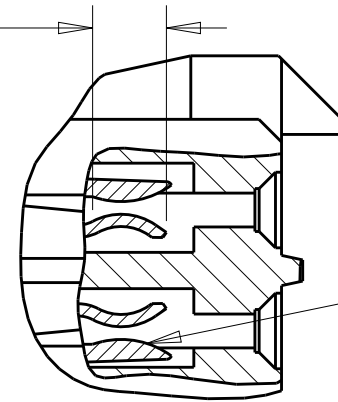


—CONTACT
QTY: 60

HOUSING
QTY: 1

DETAIL M
SCALE 8:1

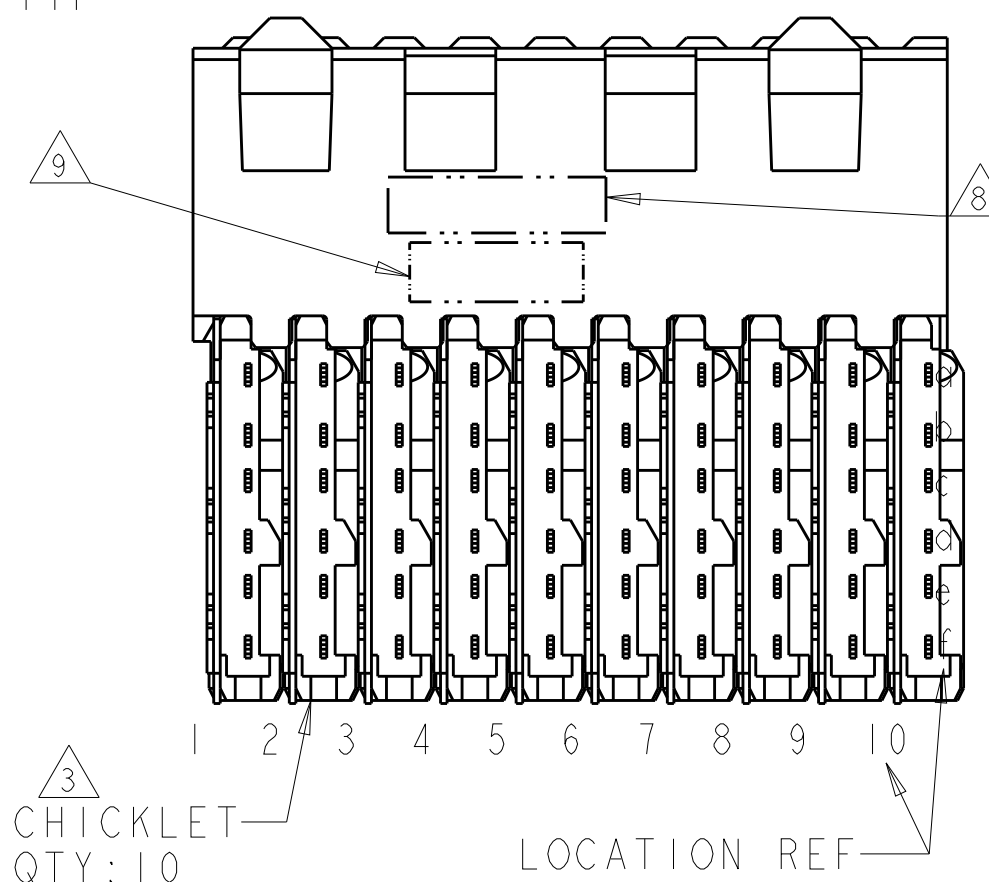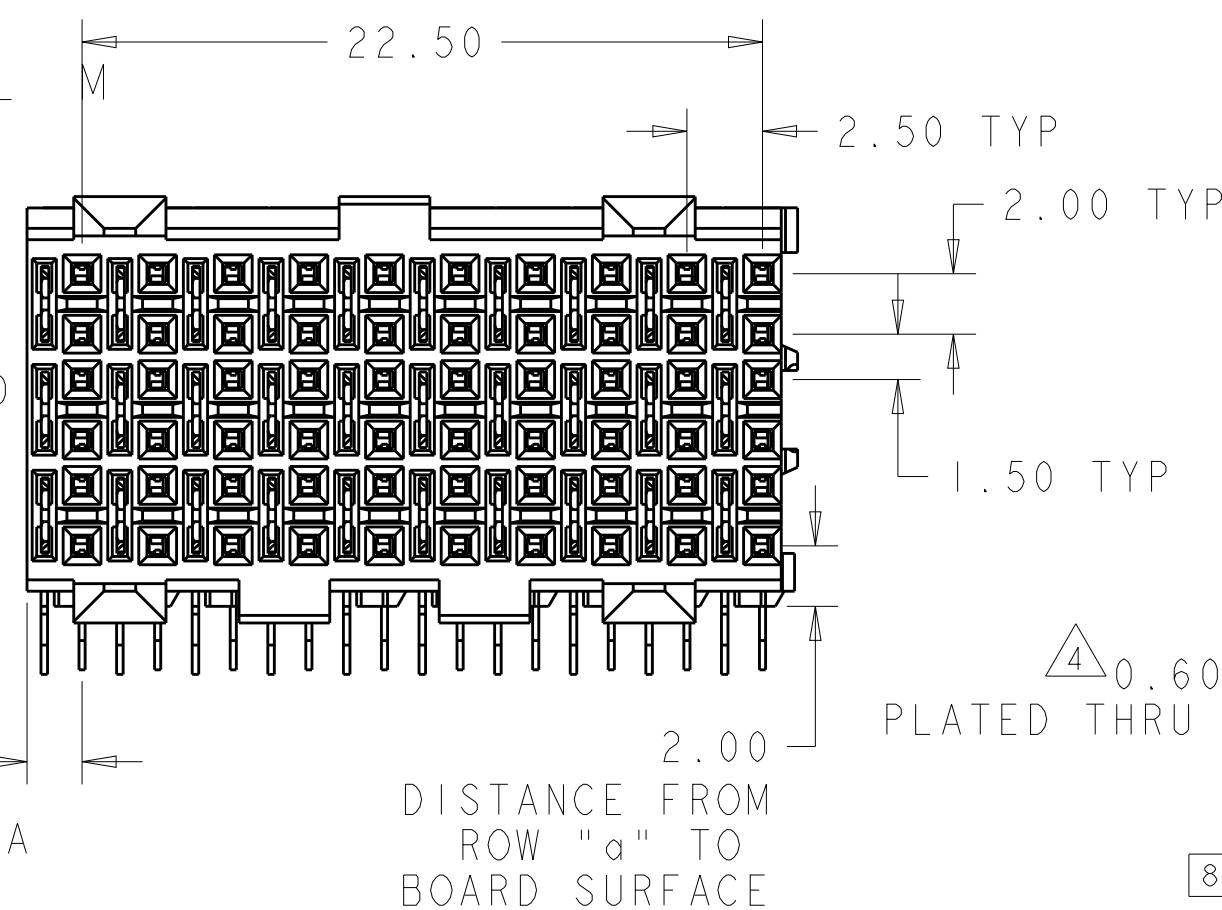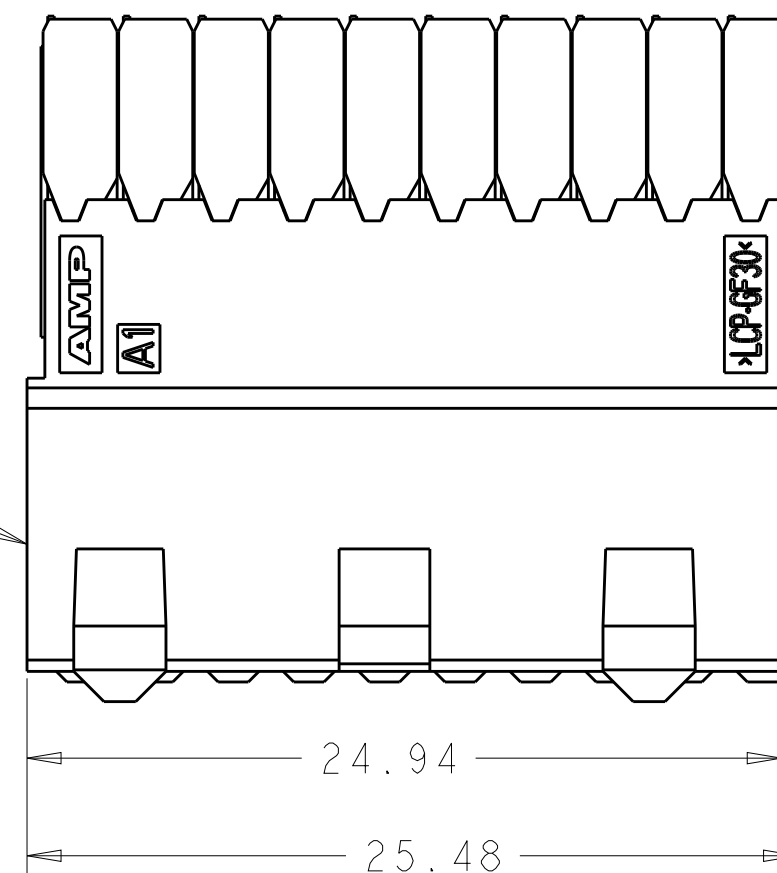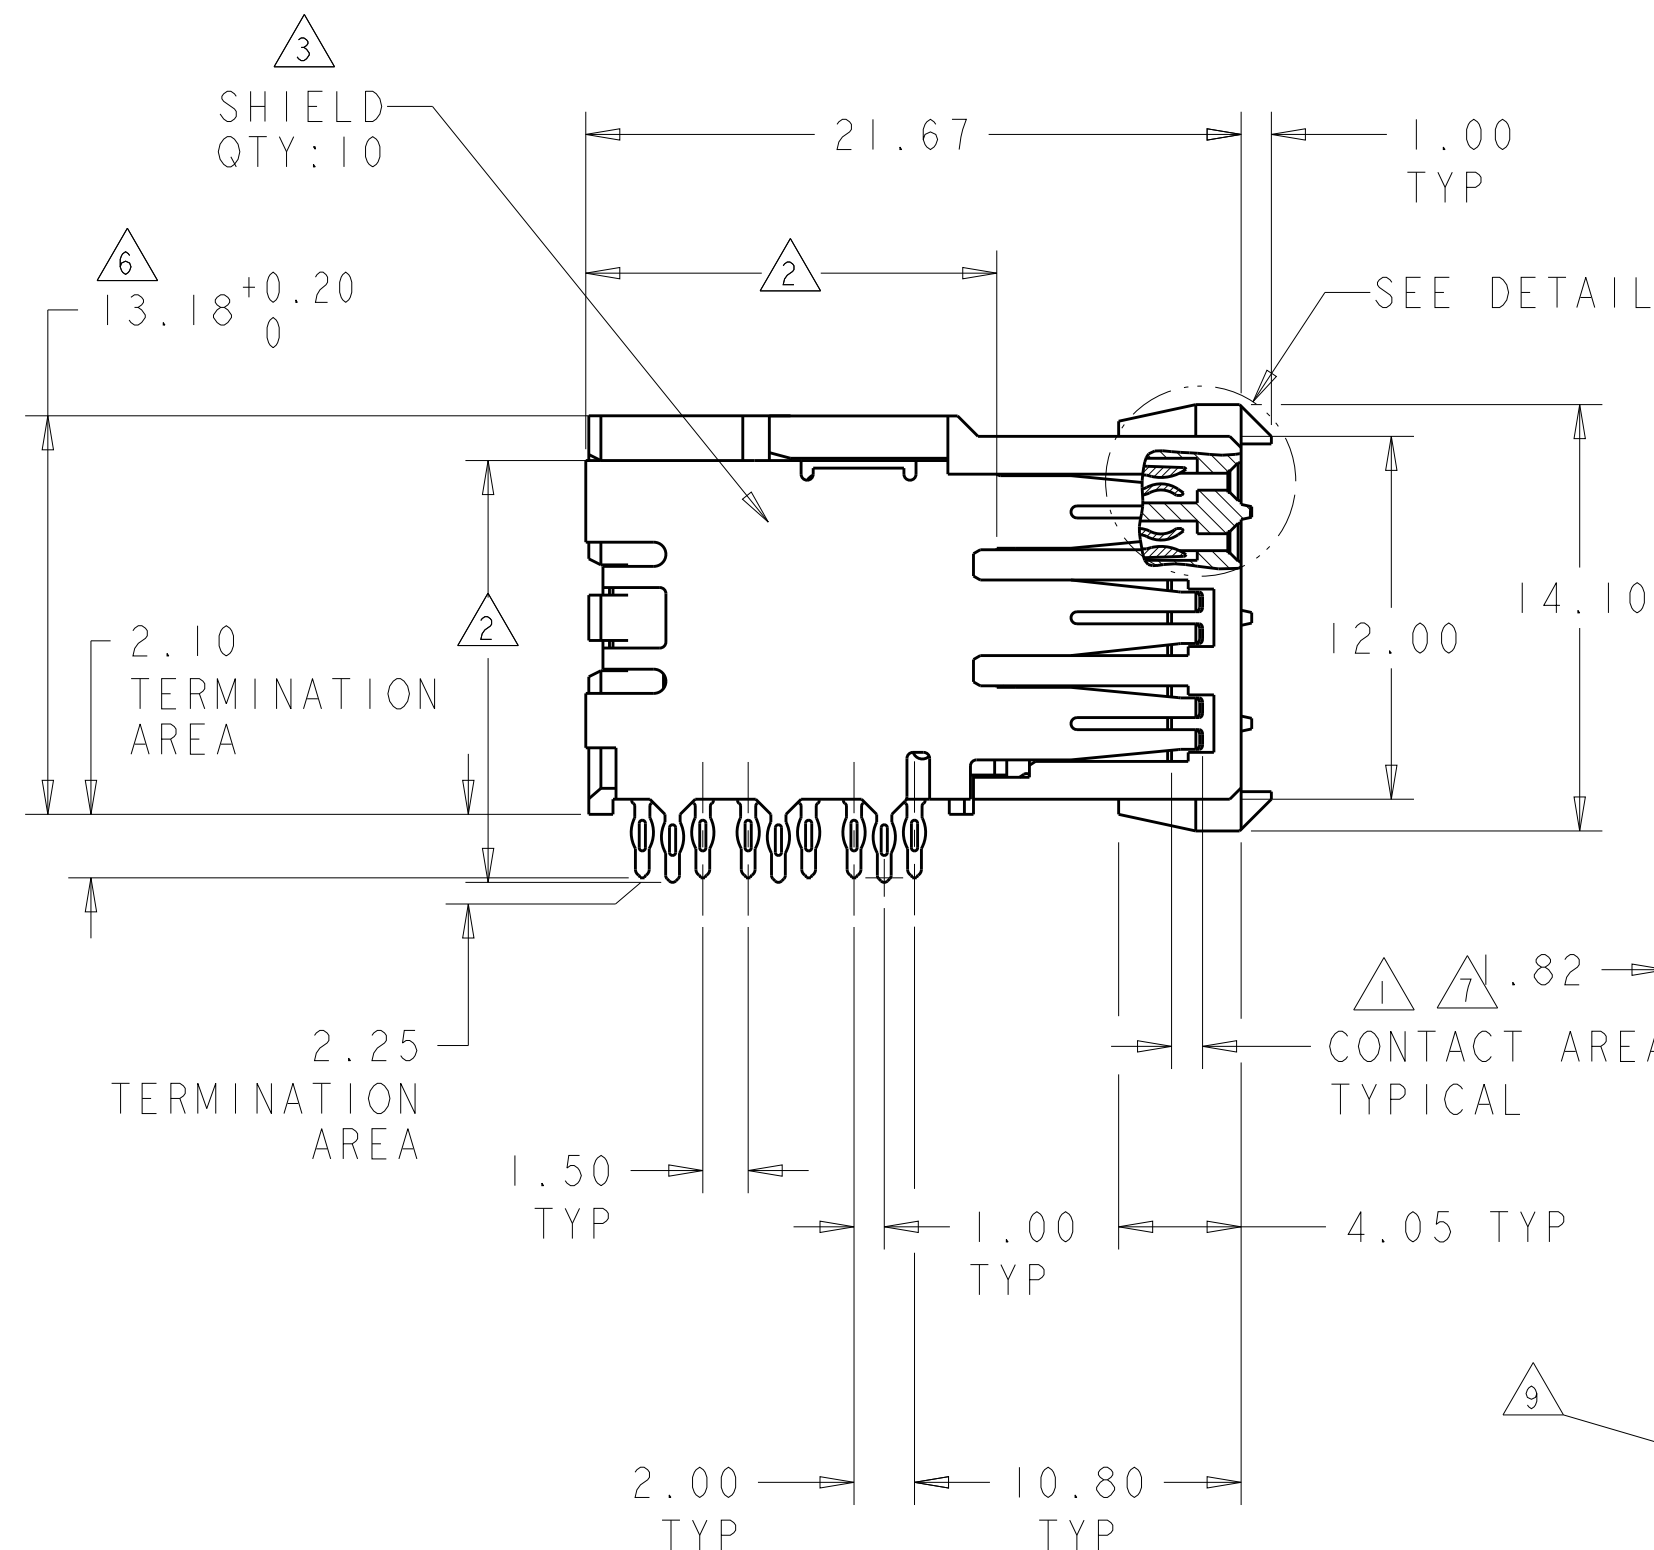

- ① CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- ② 0.76 μ m MIN TIN OVER 1.27 μ m MIN NICKEL
- ③ MATERIAL:
CONTACT - COPPER ALLOY
SHIELD - PHOSPHOR BRONZE
HOUSING - LCP, UL94V-0
CHICKLET - GLASS FILLED POLYESTER
- ④ REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- ⑤ DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- ⑥ SEATING HEIGHT TO BOARD SURFACE.
- ⑦ CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- ⑧ DATE CODE
- ⑨ PART NUMBER

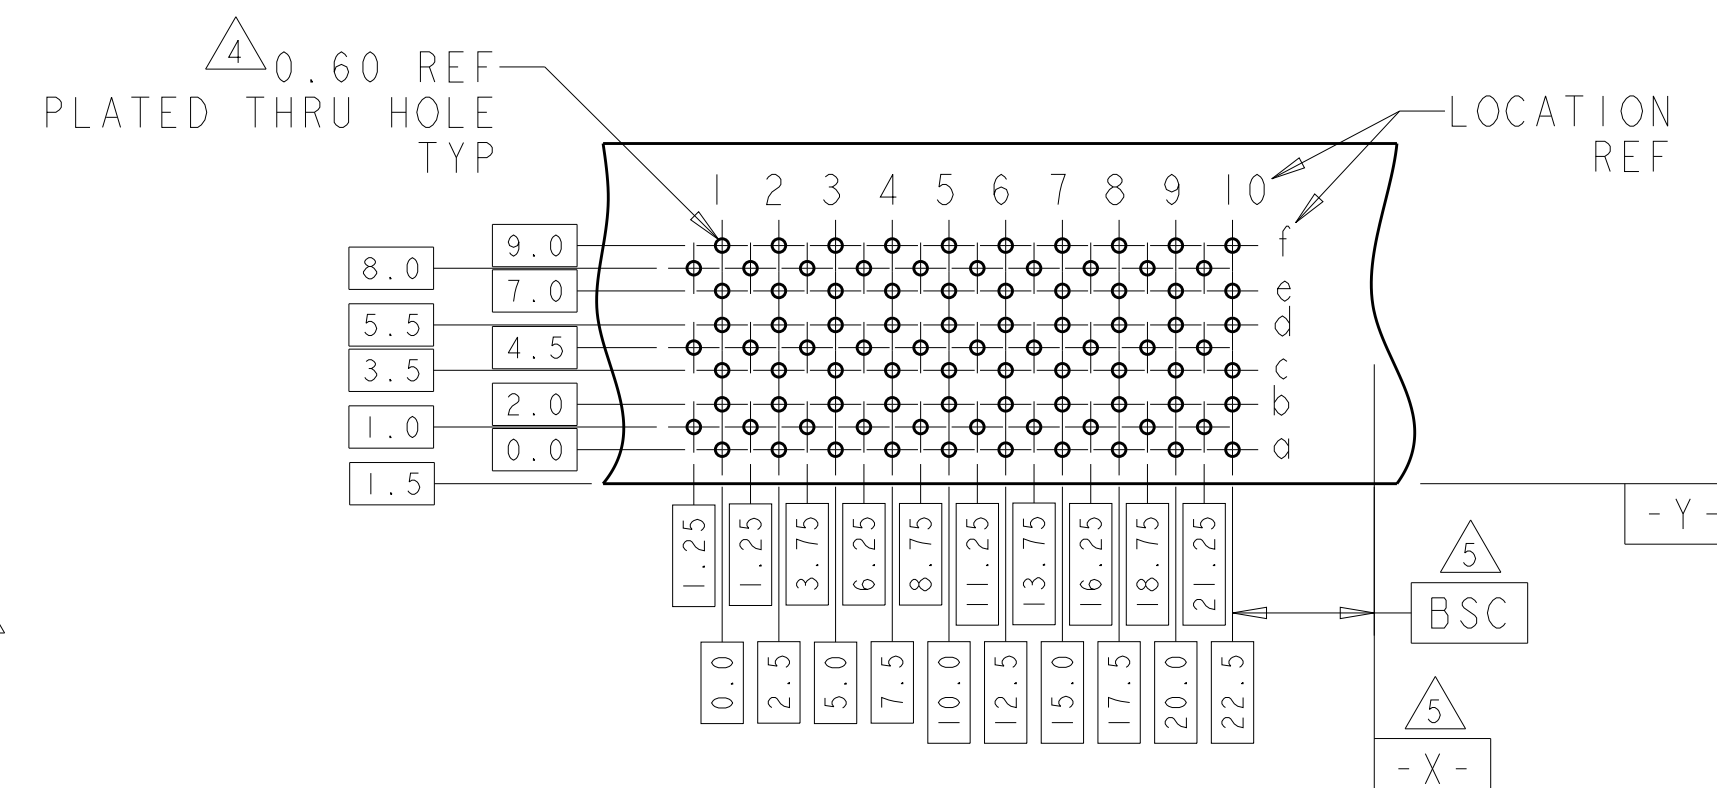

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD
SCALE 3:1

5120786-1

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN B. CARBO 07DEC04		 TE Connectivity	
DIMENSIONS: mm			CHK R. PATTERSON 07DEC04			
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. PATTERSON 07DEC04		NAME RECEPTACLE ASSEMBLY, 60 POSITION, 6 ROW, DUAL BEAM, Z-PACK HS3
		0 PLC ± 1 PLC ± 2 PLC ±0.13 3 PLC ±0.050 4 PLC ±		PRODUCT SPEC 108-1957		
		ANGLES ±		APPLICATION SPEC 114-13020		
		FINISH		WEIGHT -		
MATERIAL 		SOLDER TAIL: 1		SIZE A2		CAGE CODE 000779
SOLDER TAIL: 2		CUSTOMER DRAWING		DRAWING NO C-5120786		RESTRICTED TO
				SCALE 3.1		SHEET OF
						REV B