

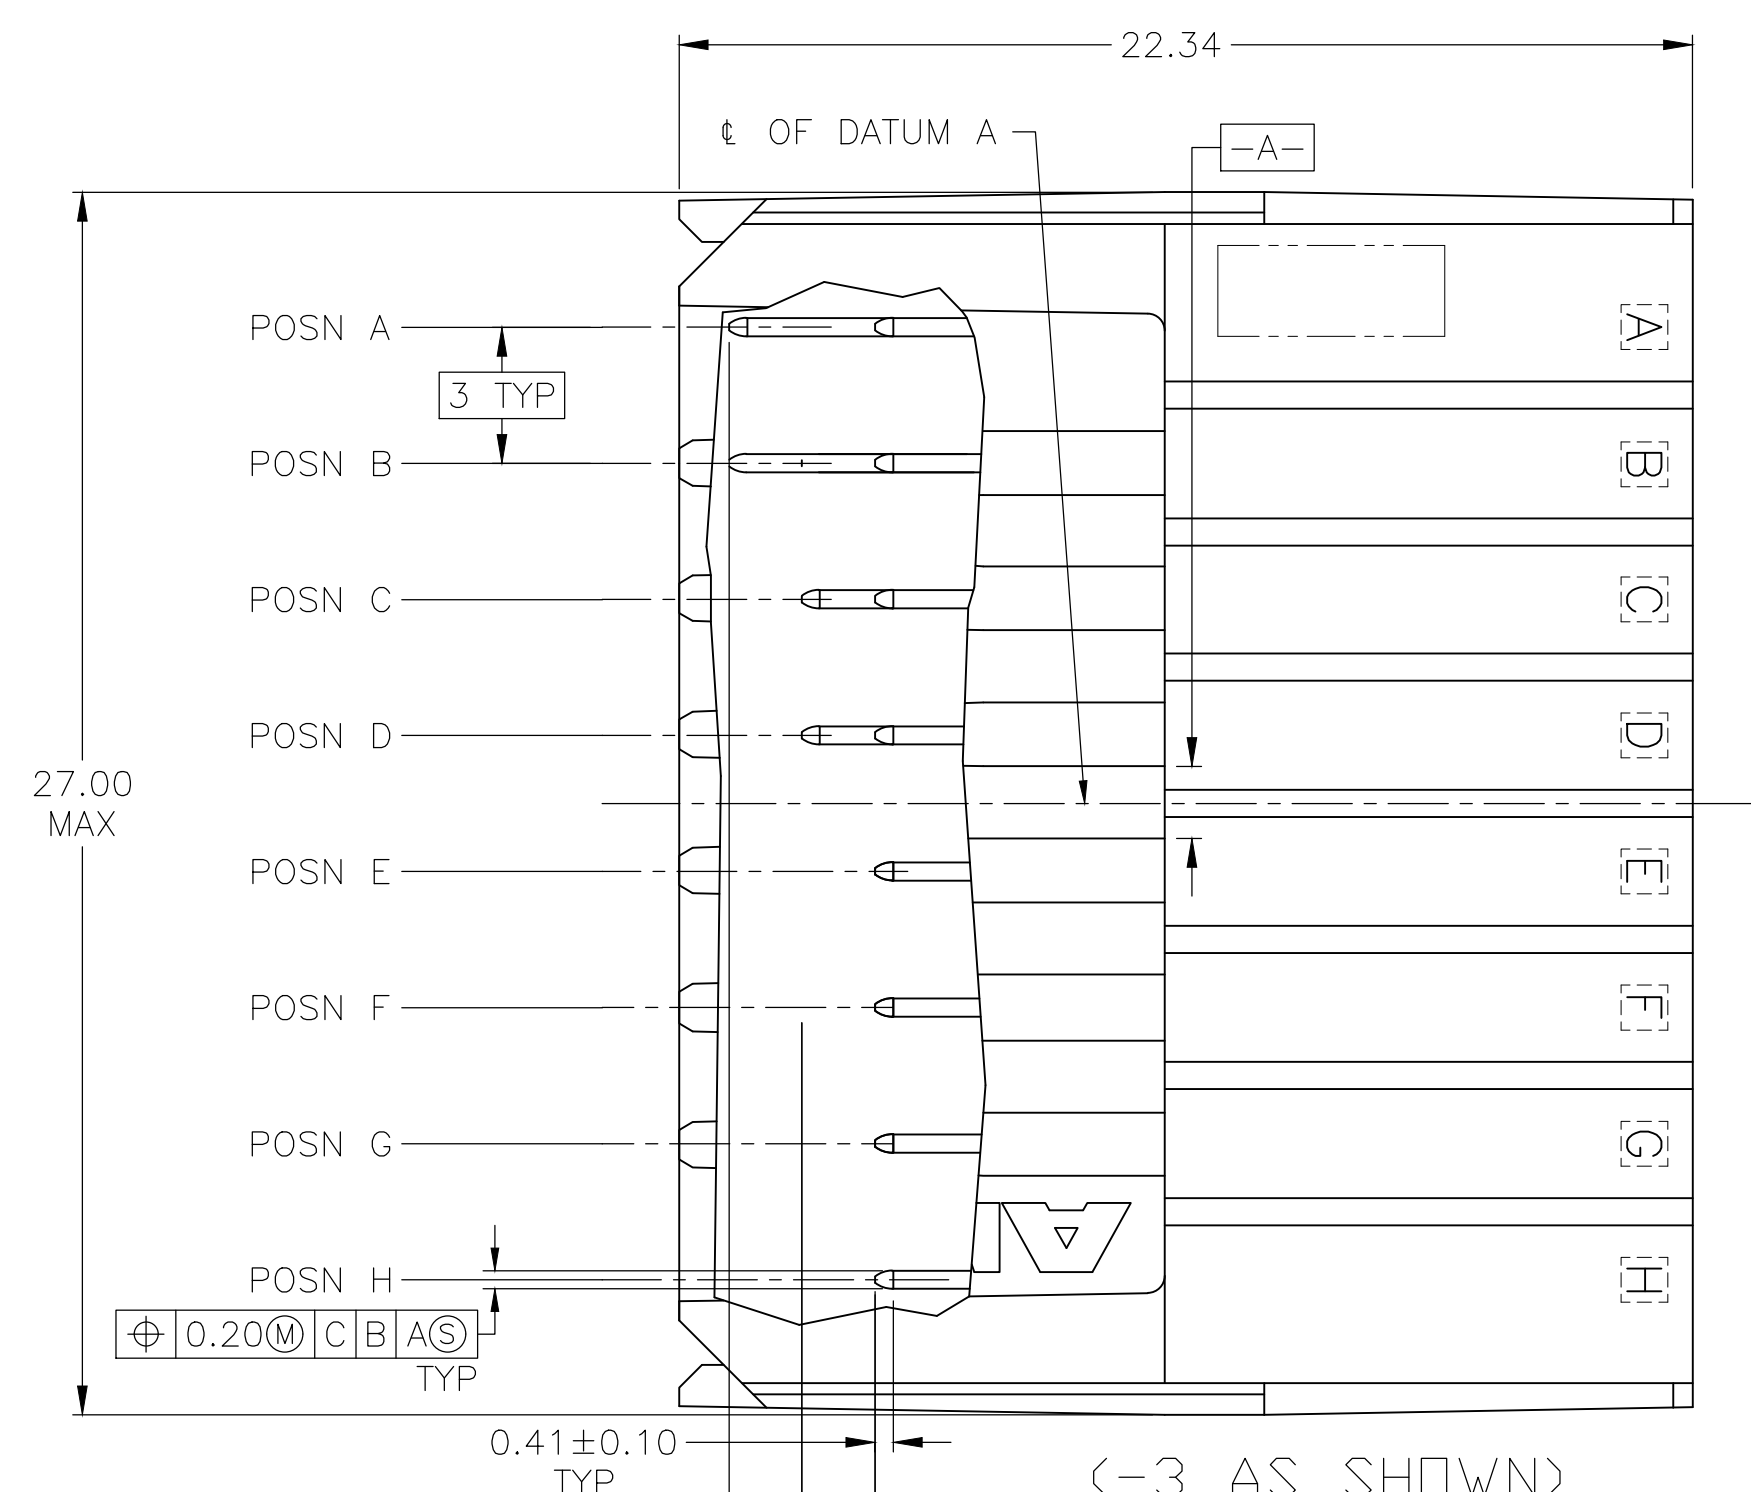
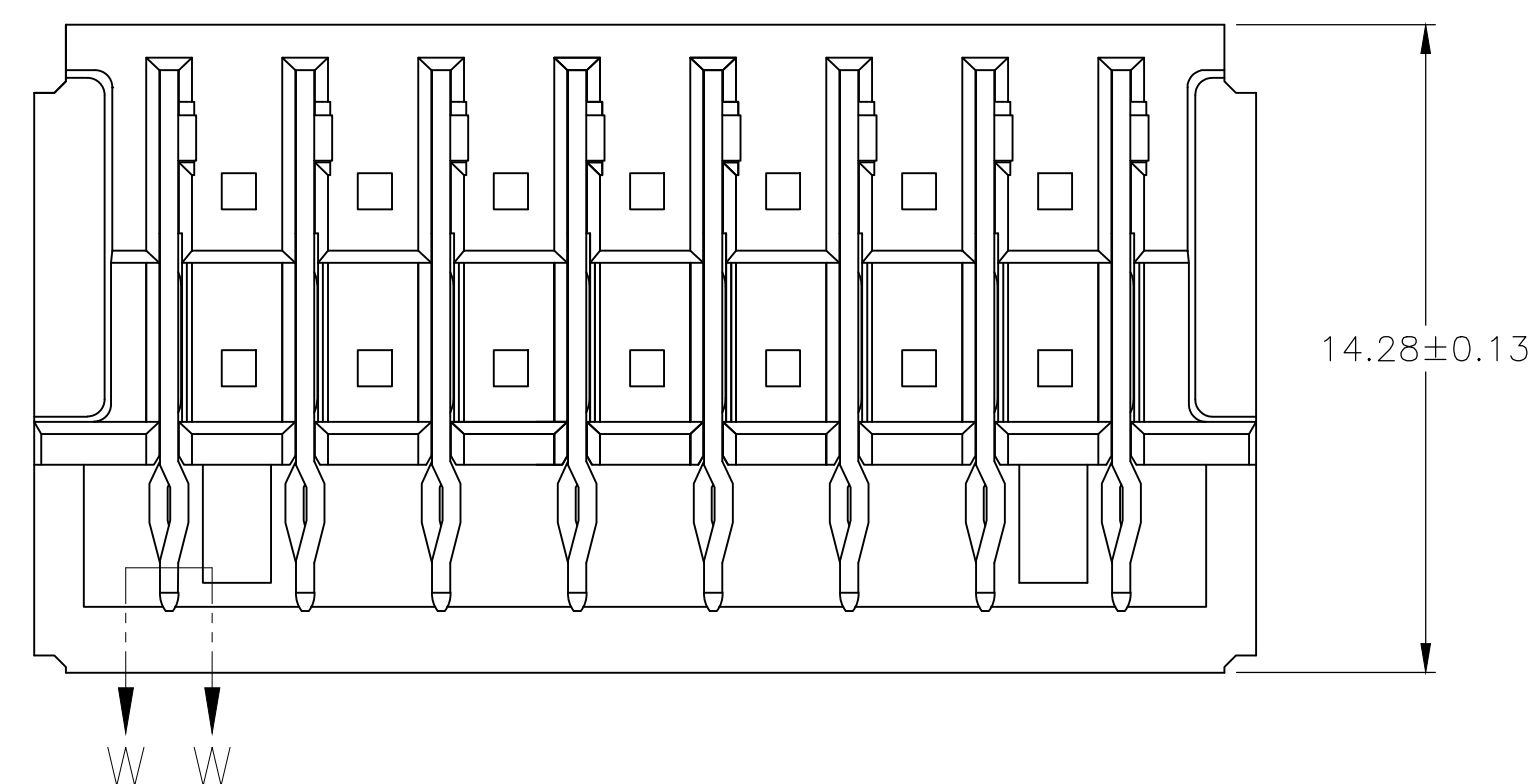


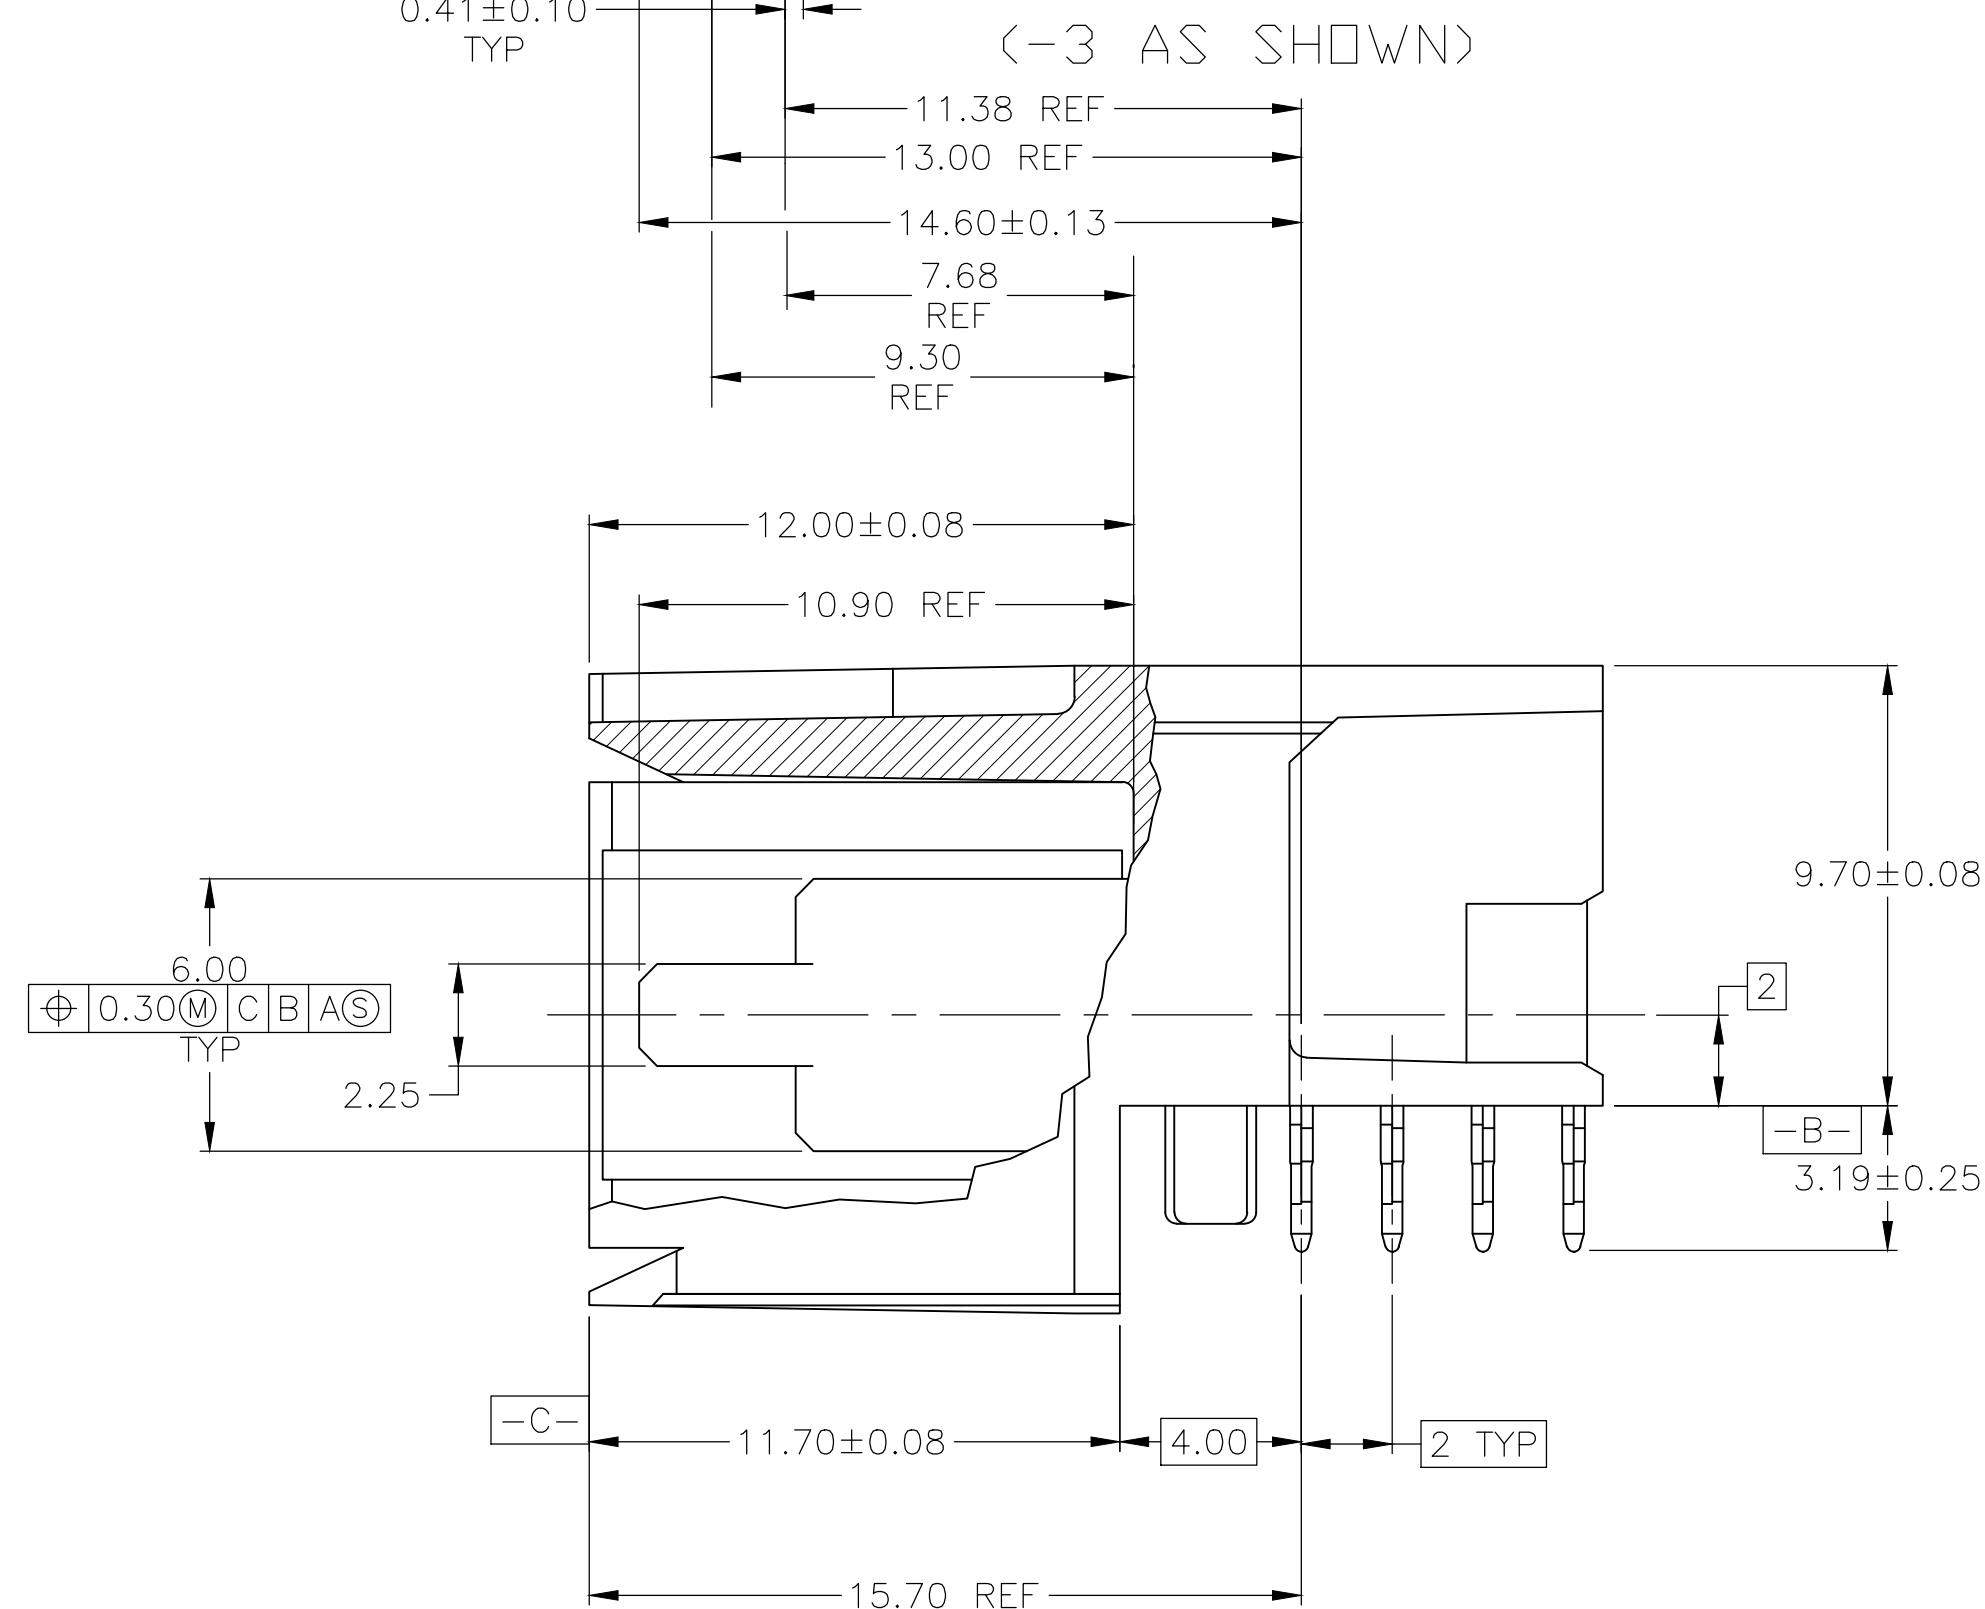

1. MATERIAL: HOUSING: POLYESTER. COLOR: GRAY. UL 94V-0.
CONTACT: COPPER ALLOY.
2. FINISH: IN ACCORDANCE WITH PRODUCT SPECIFICATION 108-1651,
GOLD PLATING OR EQUIVALENT PLATING ON PRODUCT CONTACT MATING AREA,
AND MATTE TIN PLATING ON COMPLIANT PIN AREA, ALL OVER MATTE NICKEL
UNDERPLATED. DETAIL PLEASE REFER TO PRODUCT SPECIFICATION 108-1651.
3. FINISH: CONTACT LUBRICATION WITH BELLCORE APPROVED
LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1,
NOVEMBER 1995.
4. THE 10.26 ± 0.13 DIMENSION APPLIES IN THIS AREA.
5. REFERENCE APPLICATION SPEC 114-1103 FOR
RECOMMENDED PLATED THRU HOLE DIAMETER AND
PLATING THICKNESS.
6. CURRENT RATING 10A/CONTACT PER PRODUCT SPEC 108-1651.

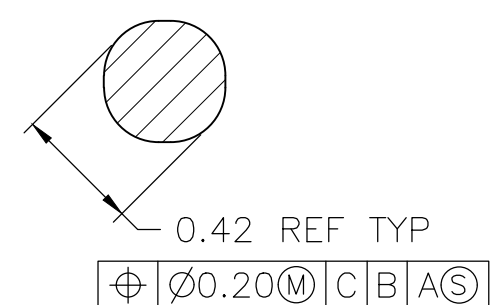

A,B	C,D	E,F,G,H	8	5646958-3
A,C,E,G	—	B,D,F,H	8	5646958-2
A,B,C,D,E,F,G,H	—	—	8	5646958-1
POSITIONS LOADED WITH 10.90 REF CONTACTS	POSITIONS LOADED WITH 9.30 REF CONTACTS	POSITIONS LOADED WITH 7.68 REF CONTACTS	NO OF LOADED POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	15DEC04	 Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		CHK R. PATTERSON	15DEC04		
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APP'D R. PATTERSON	15DEC04		
mm  0 FLCL ± - 1 FLCL ± - 2 FLCL ± 0.13 3 FLCL ± - 4 FLCL ± - ANGLES ± - <td colspan="2">PRODUCT SPEC 108-1651</td> <td rowspan="3">ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE</td>		PRODUCT SPEC 108-1651		ASSEMBLY, RIGHT ANGLE HEADER, W/ RETENTION PEGS, UNIVERSAL POWER MODULE	
APPLICATION SPEC 114-1103					
WEIGHT -					
MATERIAL	FINISH	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	 	A1	00779	C5646958	
CUSTOMER DRAWING		SCALE	6:1	SHEET 1 of 1	REV C