

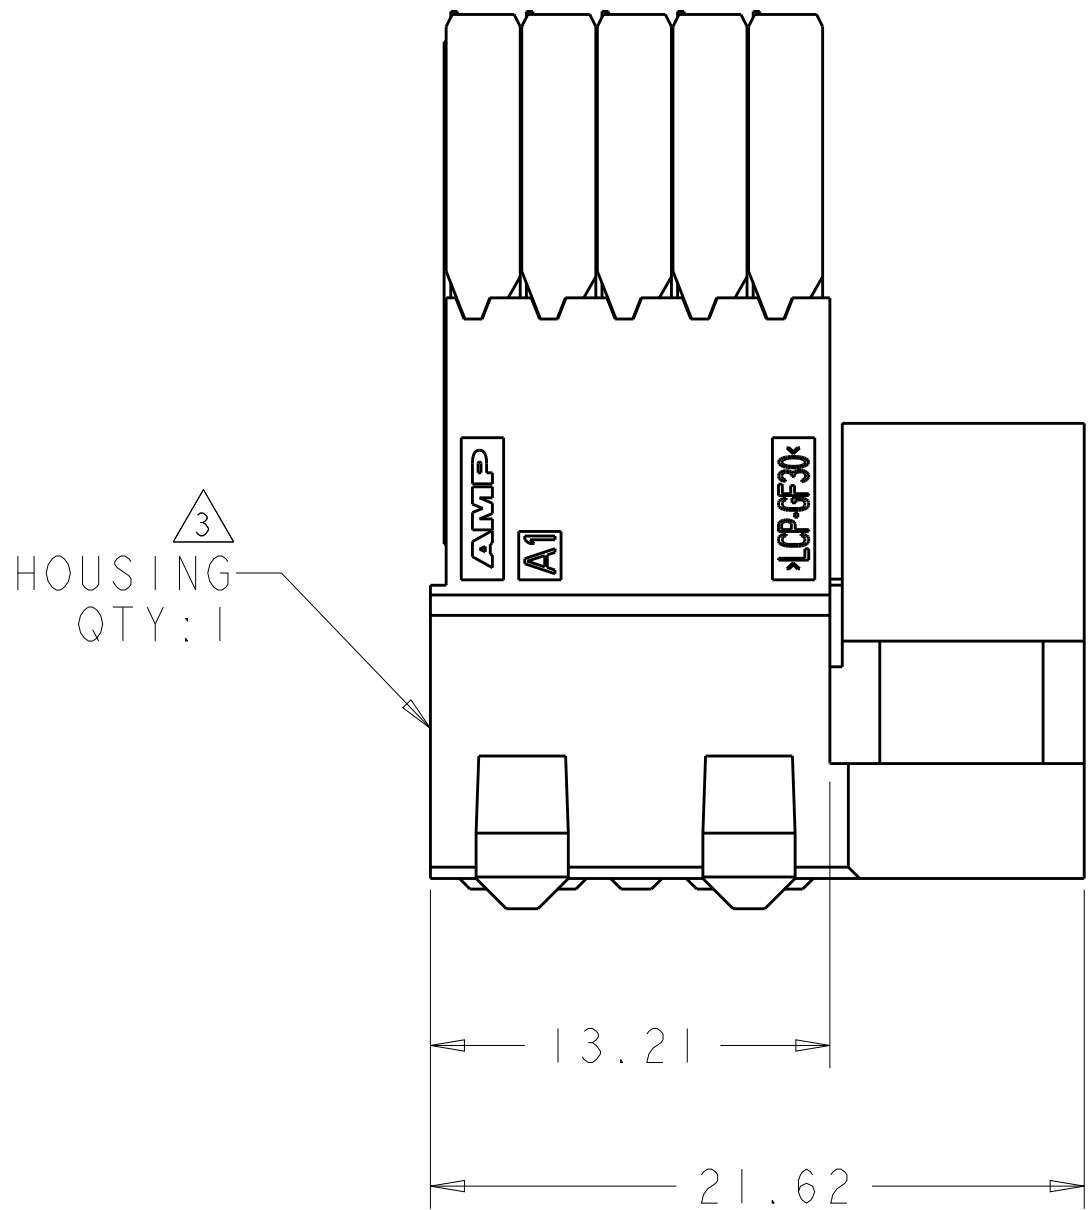
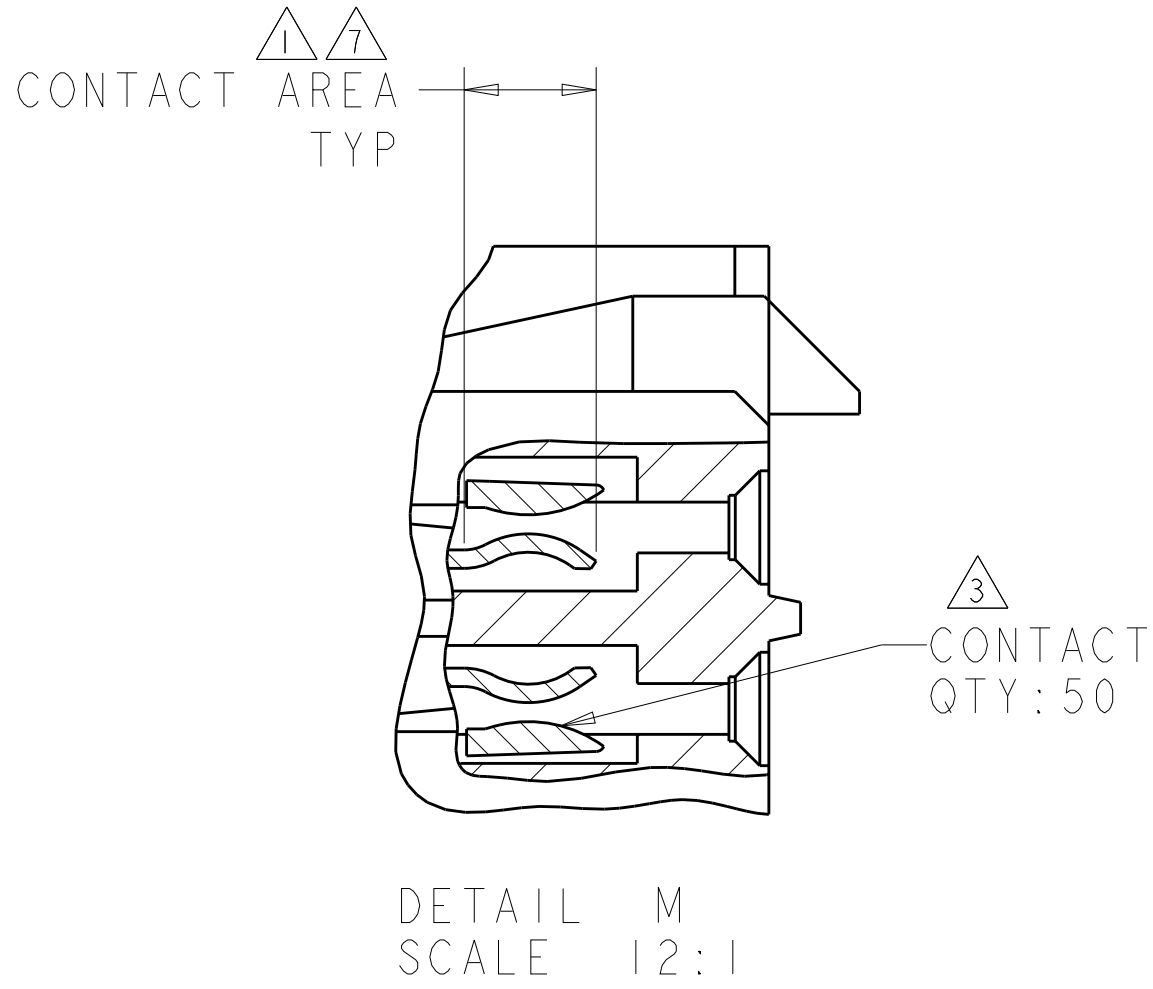
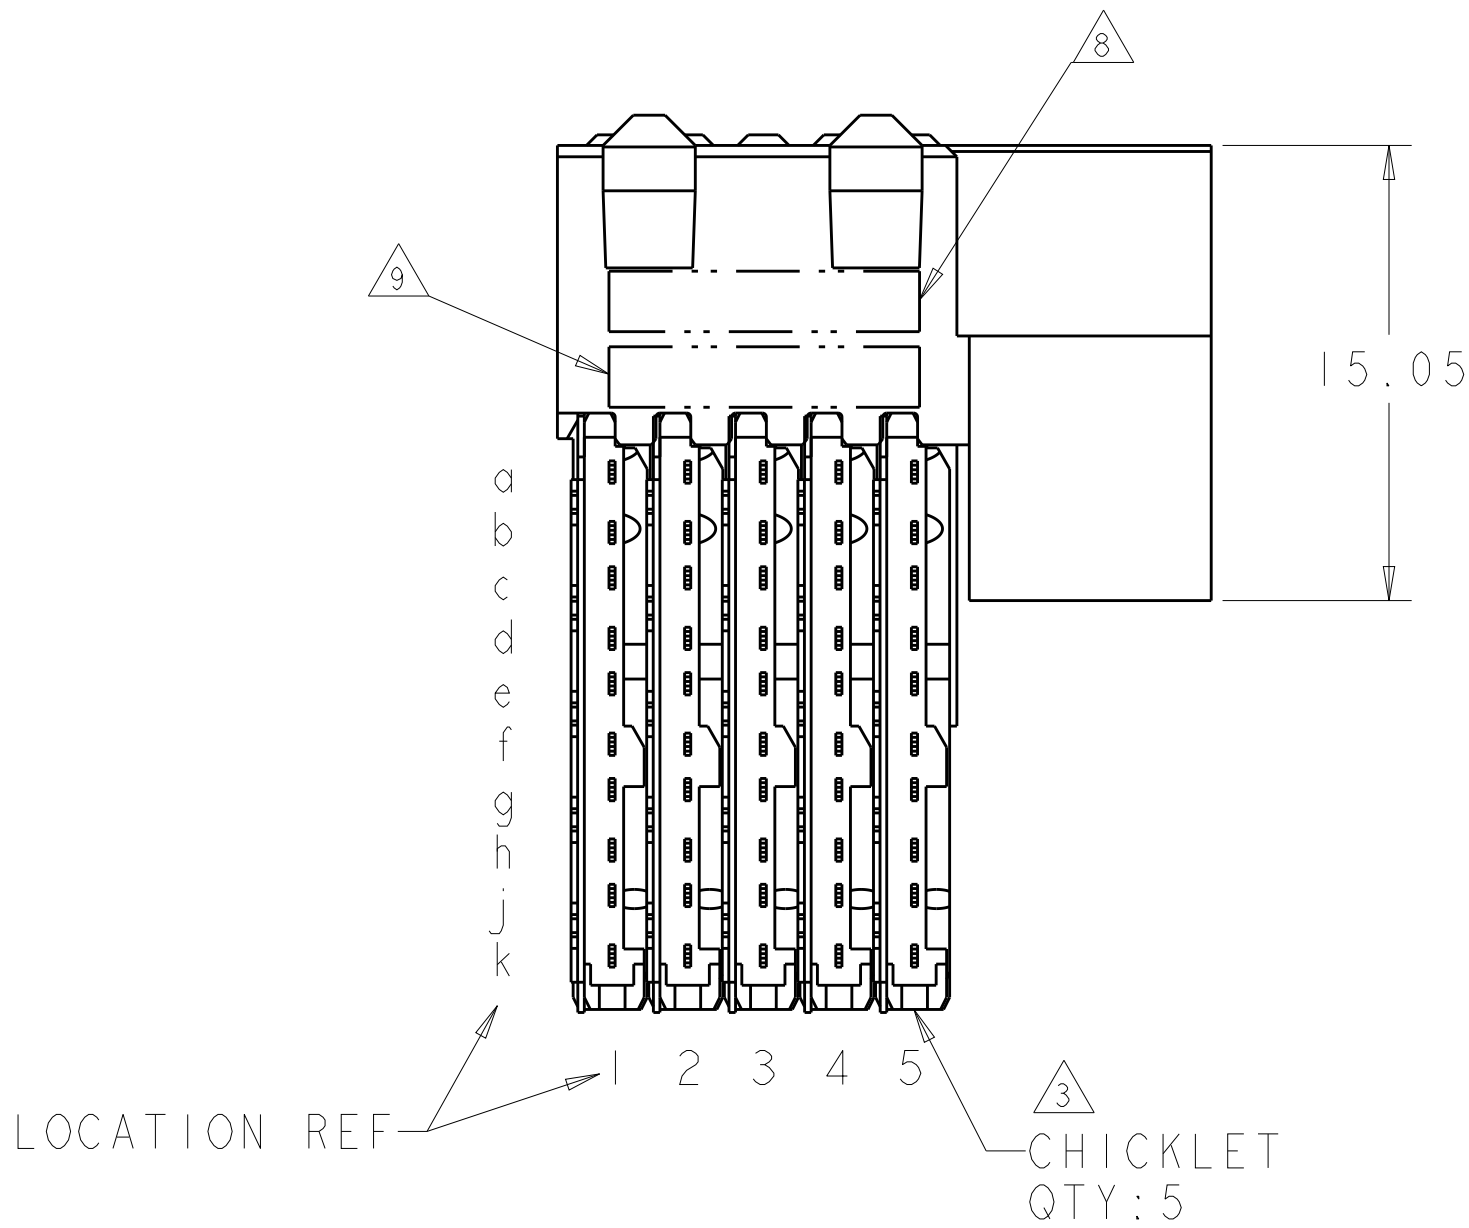
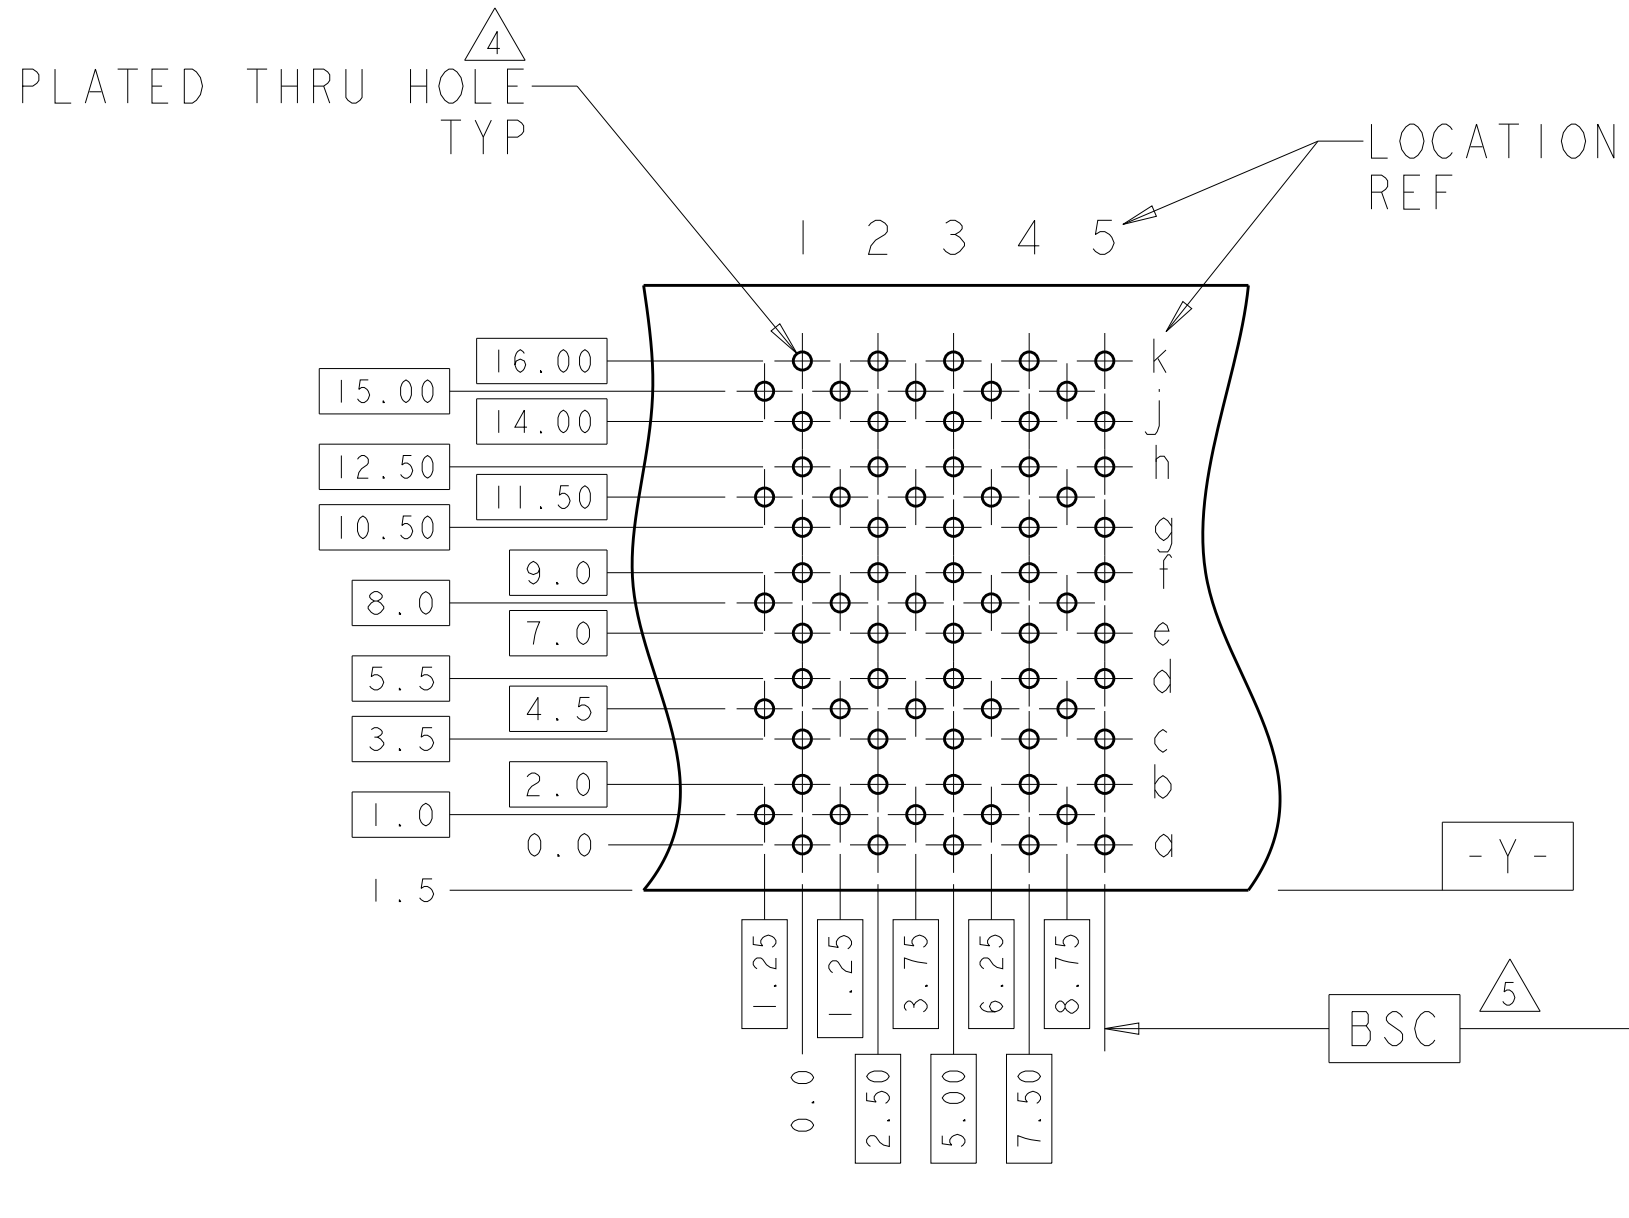


LOC		DIST		REVISIONS						
AD	00	P	LTR	DESCRIPTION			DATE	DWN	APVD	
			B	REVISED PER ECO-18-020072			26DEC2018	R.L	H.L	

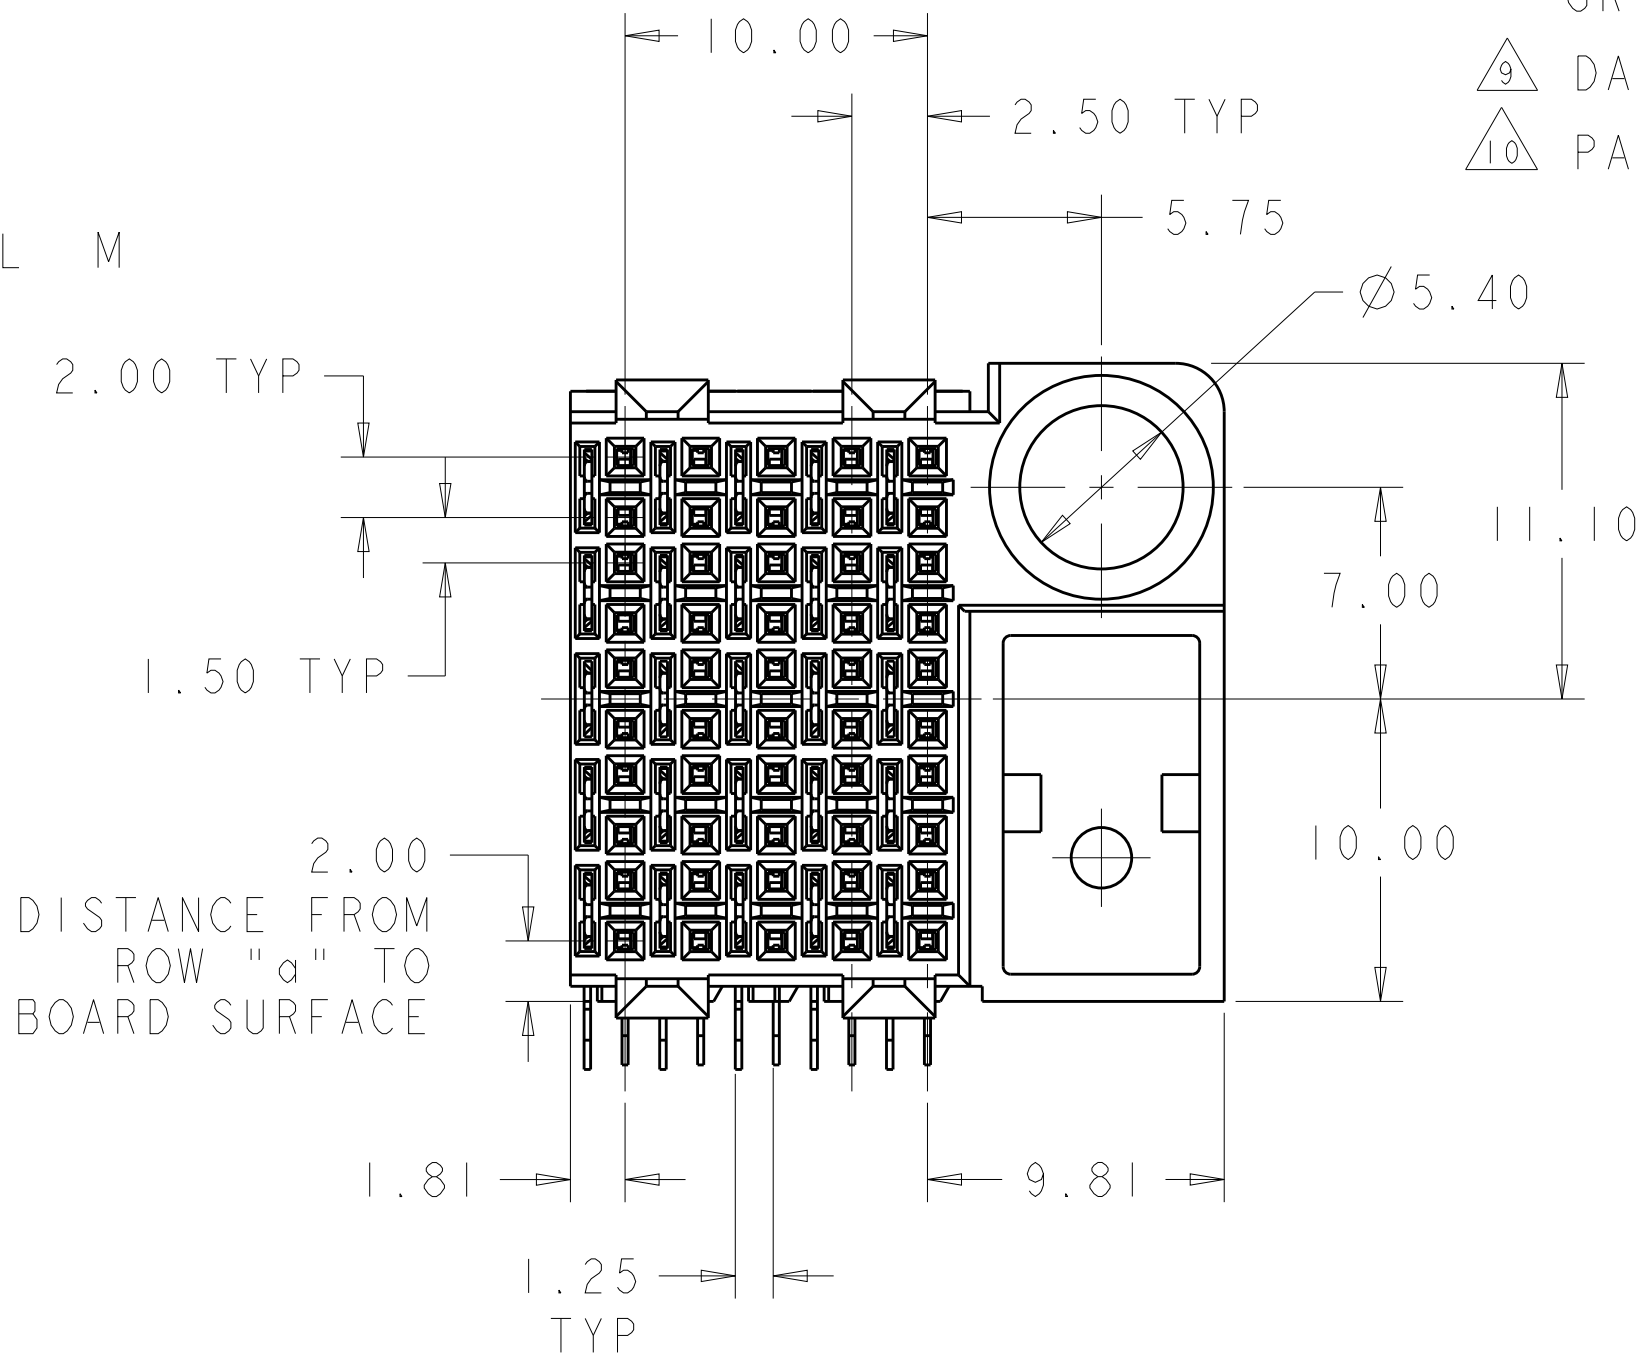

- CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
- 0.76µm MIN TIN OVER 1.27µm MIN NICKEL
- MATERIAL: CONTACT - COPPER ALLOY
SHIELD - PHOSPHOR BRONZE
HOUSING - LCP, UL94V-0
CHICKLET - GLASS FILLED POLYESTER
- REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- SEATING HEIGHT TO BOARD SURFACE.
- CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- DATE CODE
- PART NUMBER

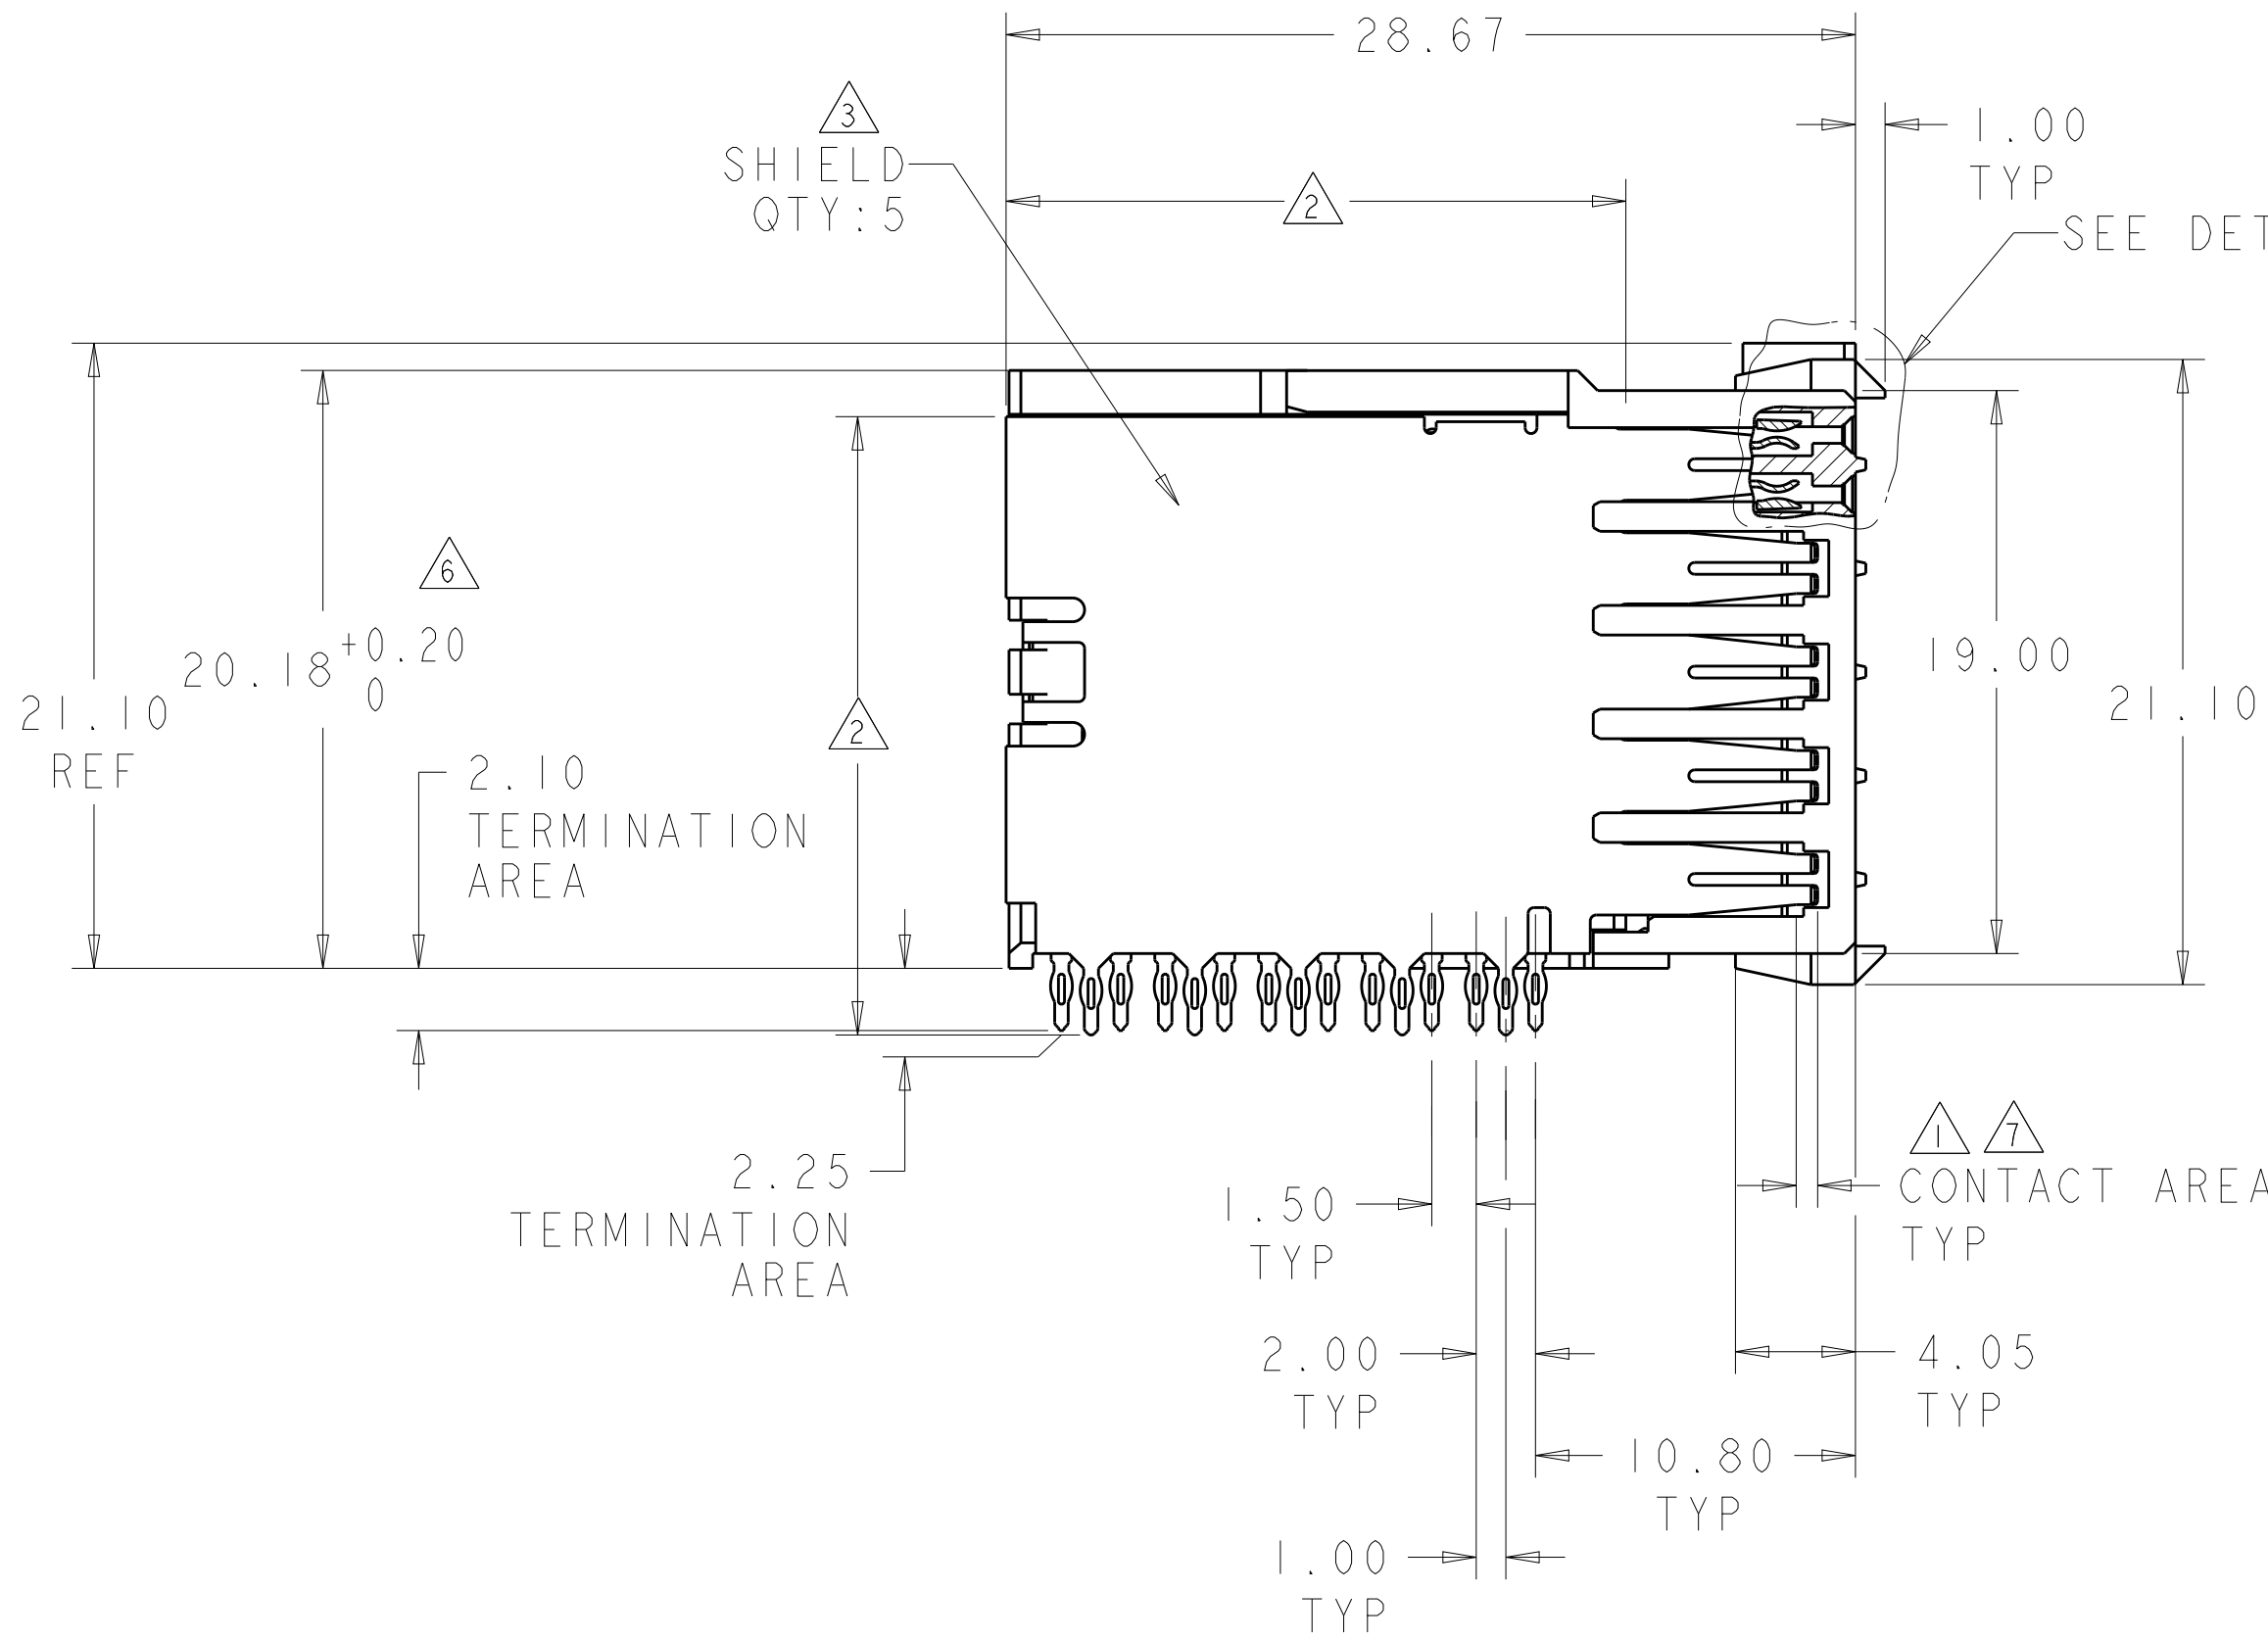

RECOMMENDED PRINTED
CIRCUIT BOARD LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5120794-1
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO	08DEC04	TE TE Connectivity	
DIMENSIONS:		CHK R. PATTERSON	08DEC04		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD R. PATTERSON	08DEC04	NAME RECEPTACLE ASSEMBLY, 50 POSITION UNIVERSAL GUIDE PIN, RIGHT HAND, 10 ROW, DUAL BEAM, Z-PACK HS3	
	0 PLC ±.2	PRODUCT SPEC		SIZE CAGE CODE DRAWING NO	
	1 PLC ±0.2	108-1957		A100779C=5120794	
	2 PLC ±0.13	APPLICATION SPEC		RESTRICTED TO	
	3 PLC ±0.05	114-13020		SCALE 4:1 SHEET 1 OF 1 REV B	
MATERIAL	FINISH	WEIGHT			
	SOLDER TAIL CONTACT				