

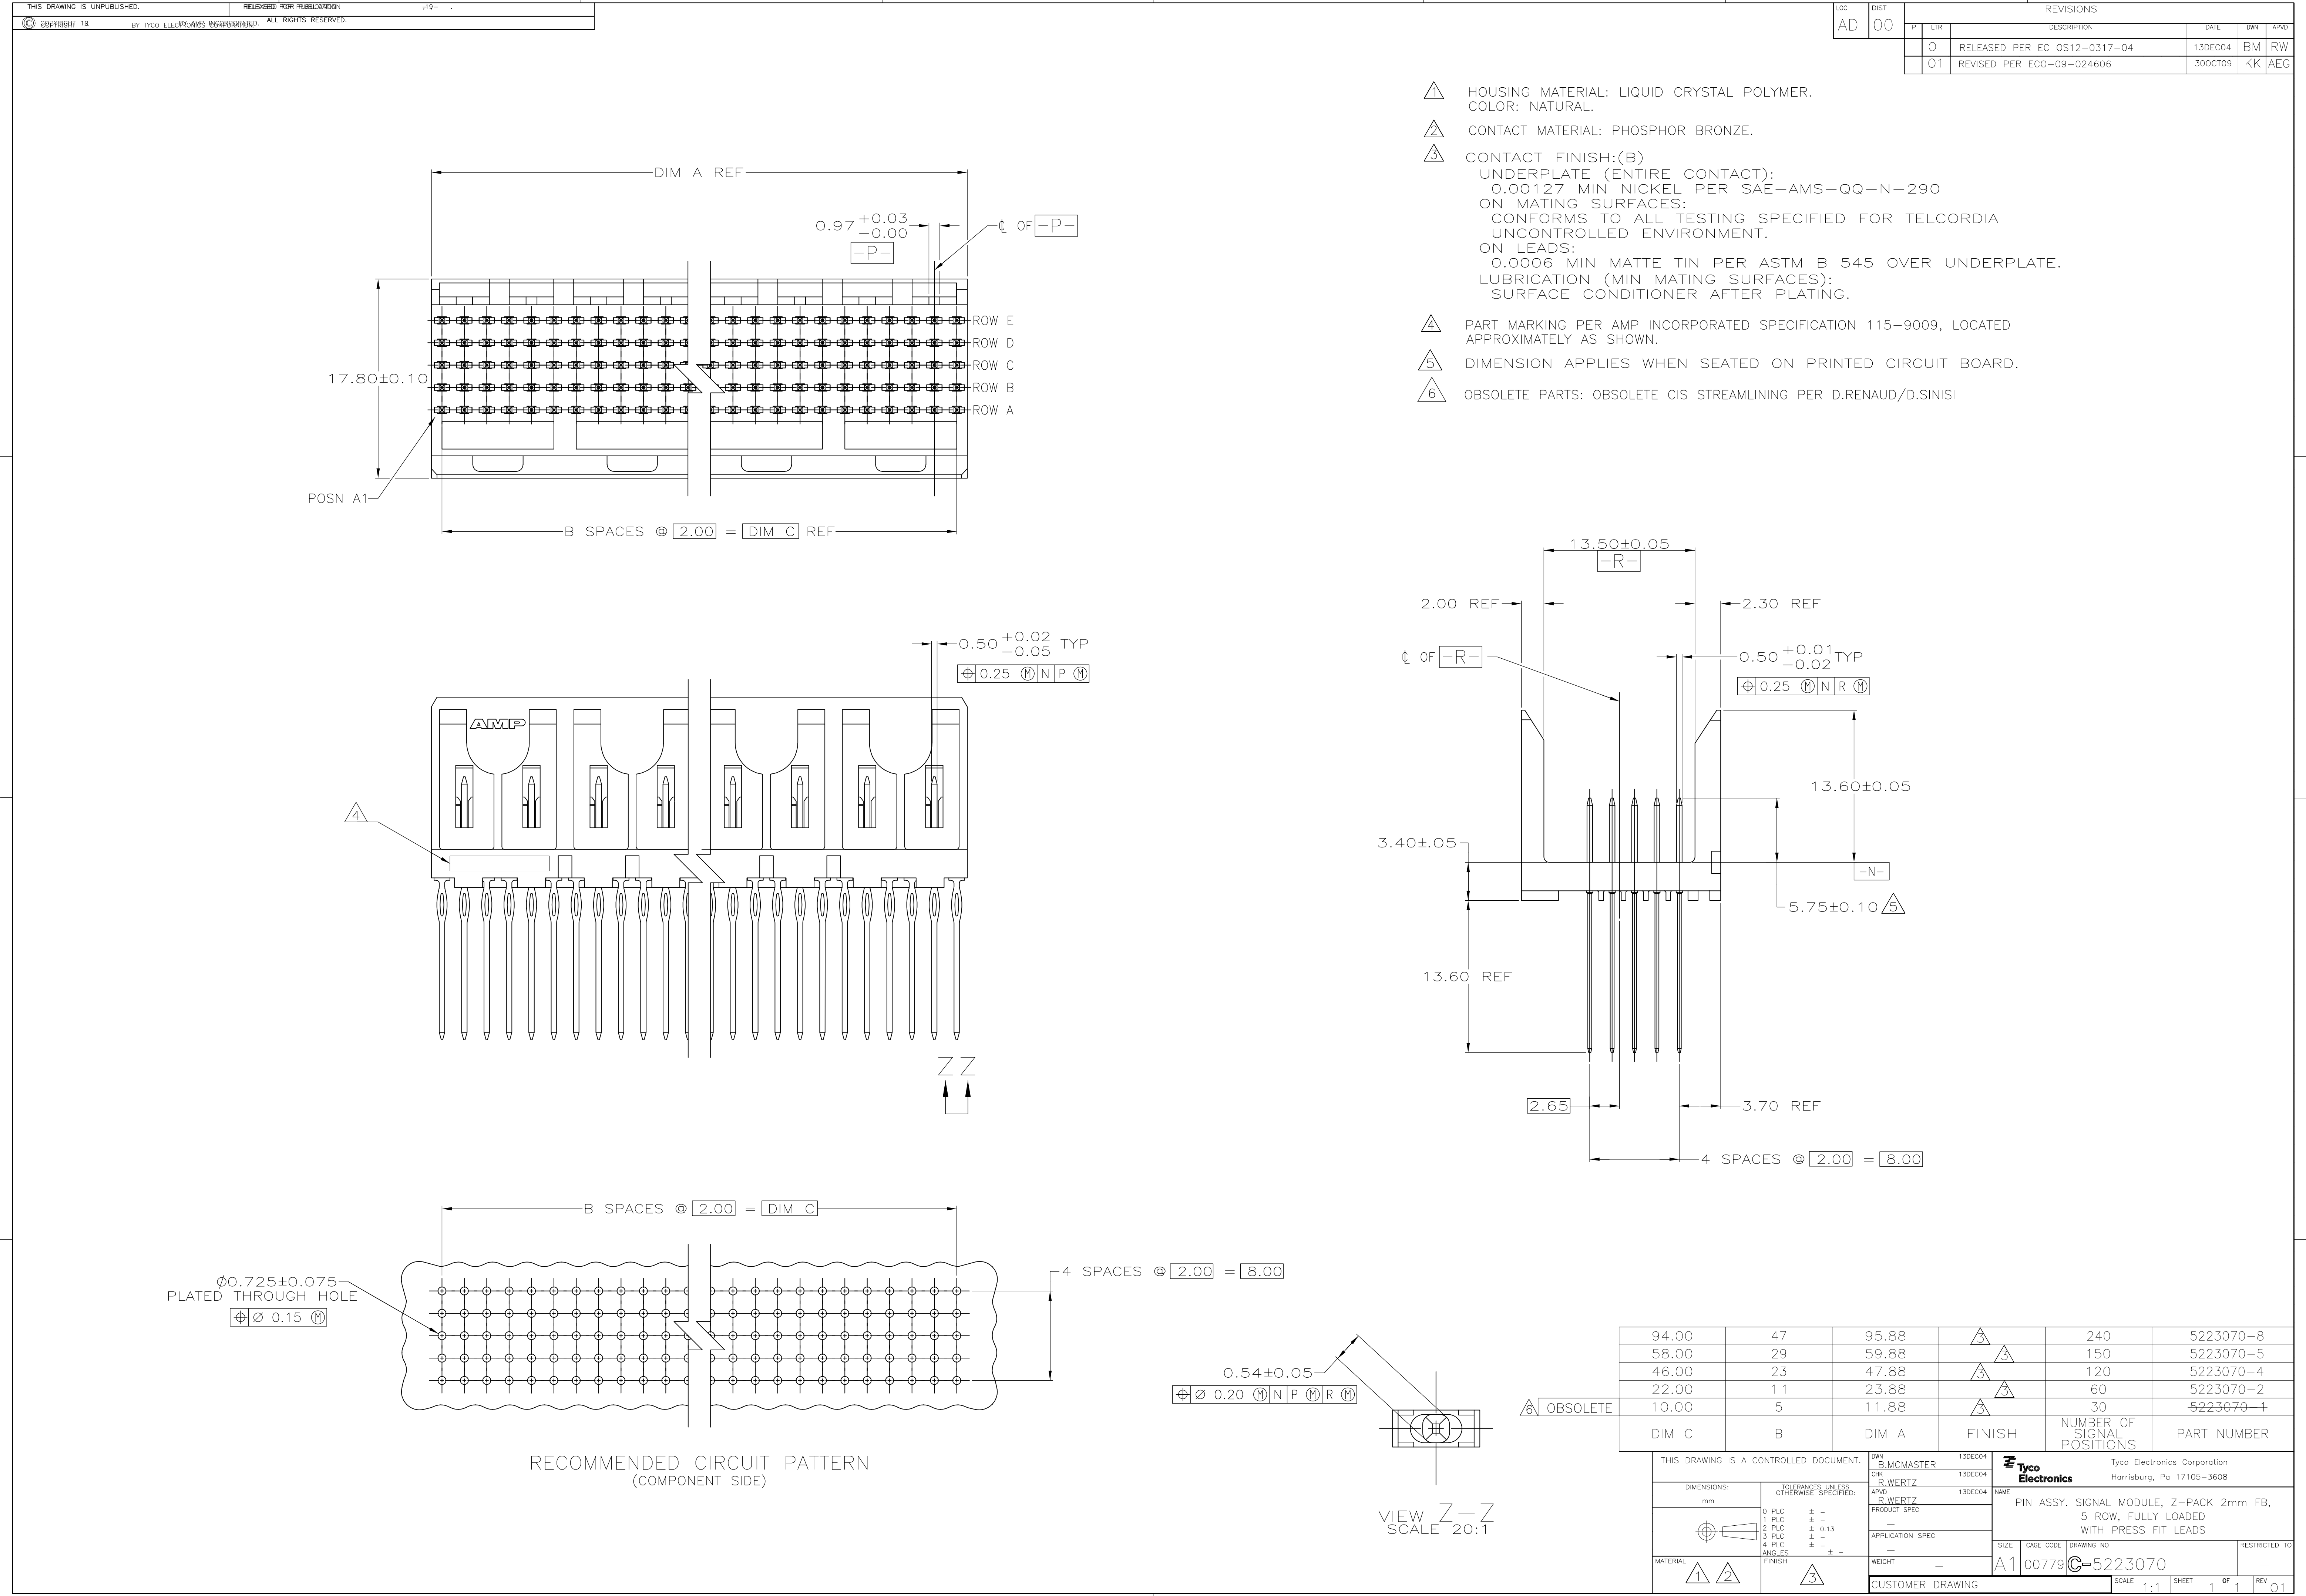
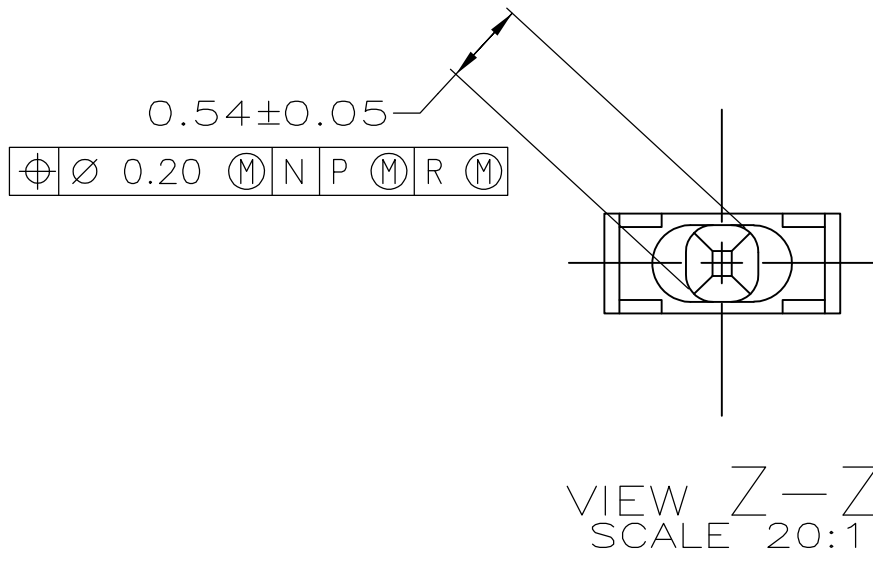


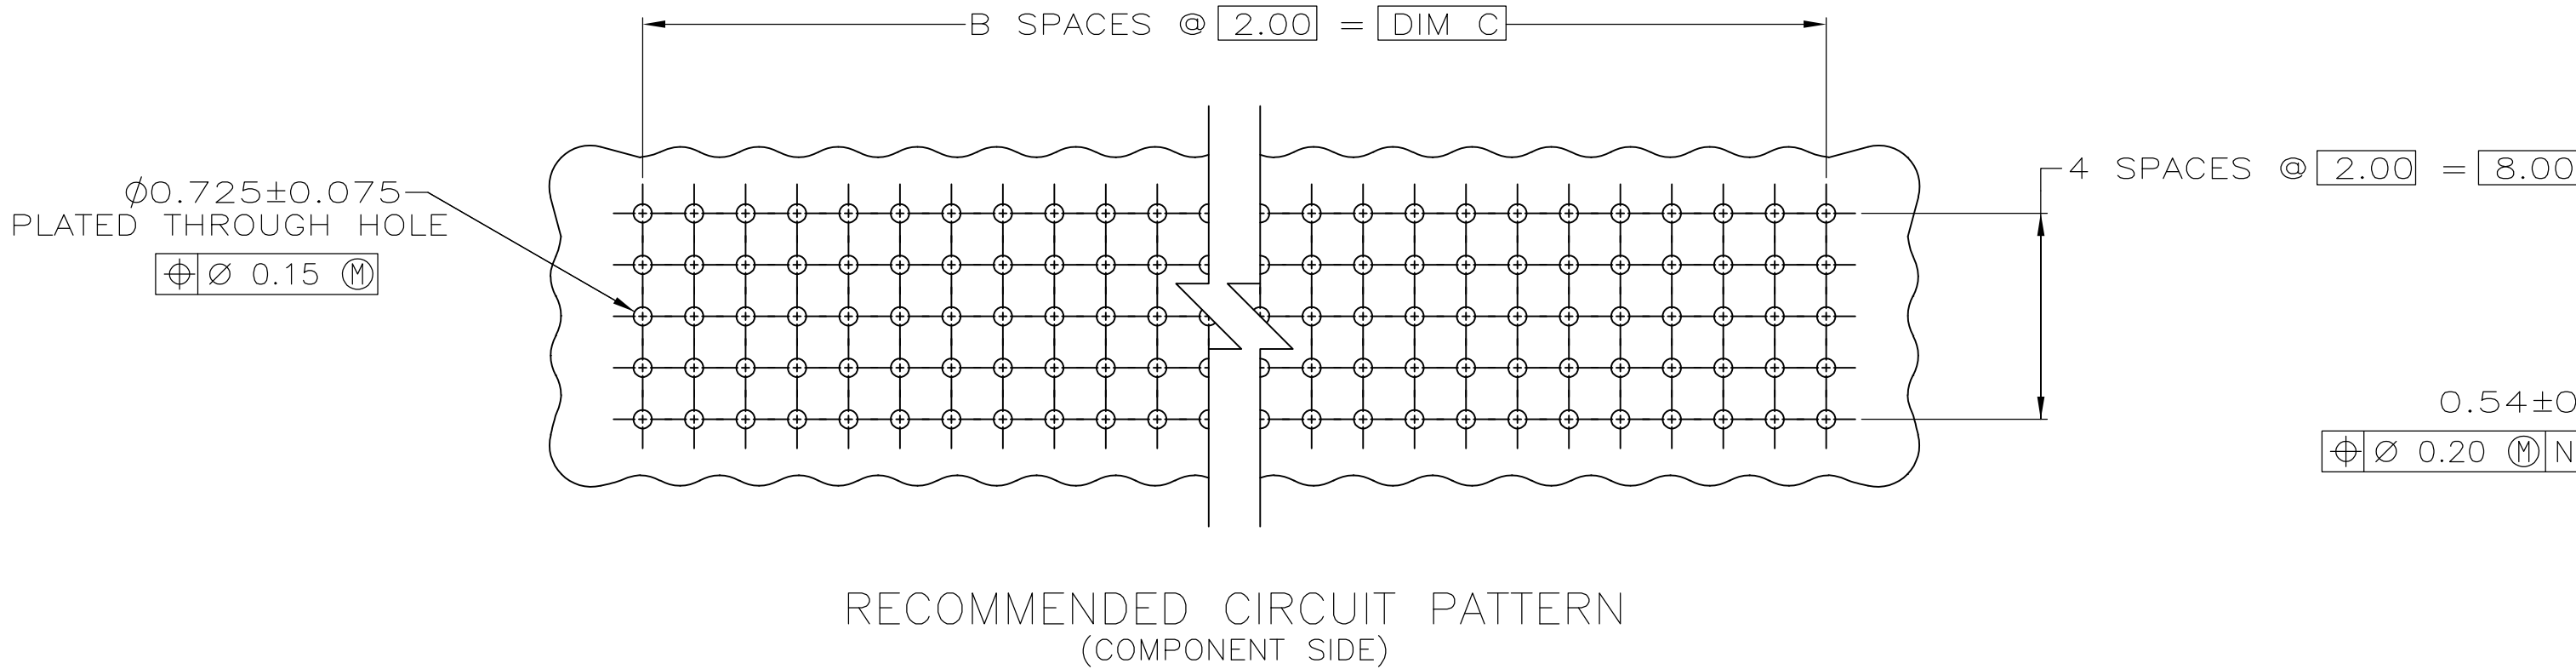

- HOUSING MATERIAL: LIQUID CRYSTAL POLYMER. COLOR: NATURAL.
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- CONTACT FINISH:(B)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.0006 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN. MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- PART MARKING PER AMP INCORPORATED SPECIFICATION 115-9009, LOCATED APPROXIMATELY AS SHOWN.
- DIMENSION APPLIES WHEN SEATED ON PRINTED CIRCUIT BOARD.
- OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

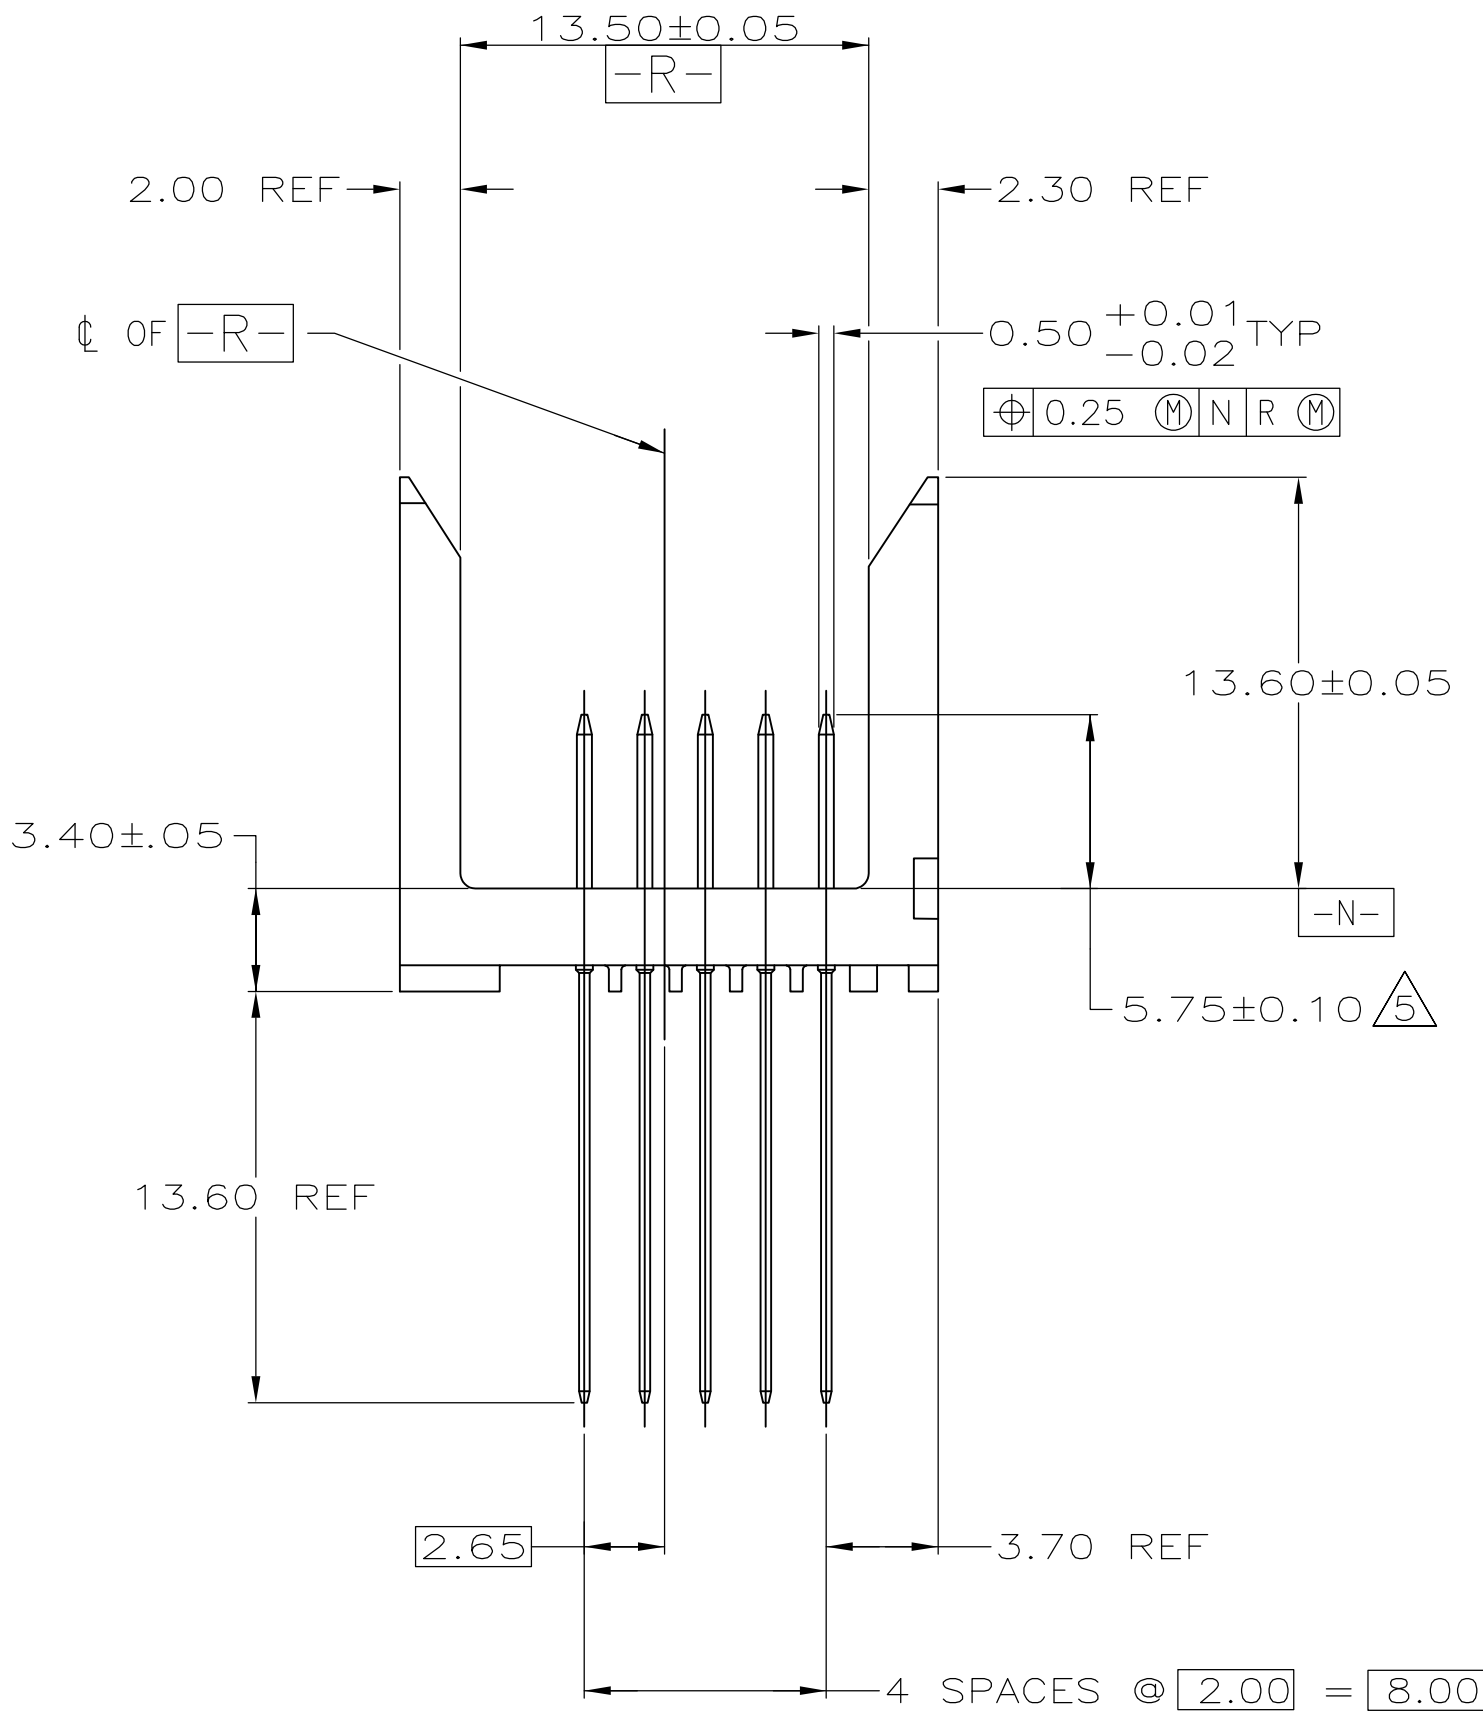

94.00	47	95.88	3	240	5223070-8
58.00	29	59.88	3	150	5223070-5
46.00	23	47.88	3	120	5223070-4
22.00	11	23.88	3	60	5223070-2
10.00	5	11.88	3	30	5223070-1
DIM C	B	DIM A	FINISH	NUMBER OF SIGNAL POSITIONS	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B MCMASTER CHK R WERTZ REV R WERTZ	13DEC04 13DEC04 13DEC04	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.13 3 PLC ± - 4 PLC ± - ANGLES ± -		FINISH 3		PIN ASSY. SIGNAL MODULE, Z-PACK 2mm FB, 5 ROW, FULLY LOADED WITH PRESS FIT LEADS	
MATERIAL 1 2		WEIGHT -		SIZE CAGE CODE DRAWING NO RESTRICTED TO	
CUSTOMER DRAWING		SCALE 1:1		SHEET 1 of 1 REV 01	